



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp<sup>®</sup>2006 = 112

PowerEdge FC830 (Intel Xeon E5-4669 v4, 2.20 GHz)

SPECfp\_base2006 = 106

CPU2006 license: 55


Test date: Apr-2016

Test sponsor: Dell Inc.

Hardware Availability: Jun-2016

Tested by: Dell Inc.

Software Availability: Mar-2016

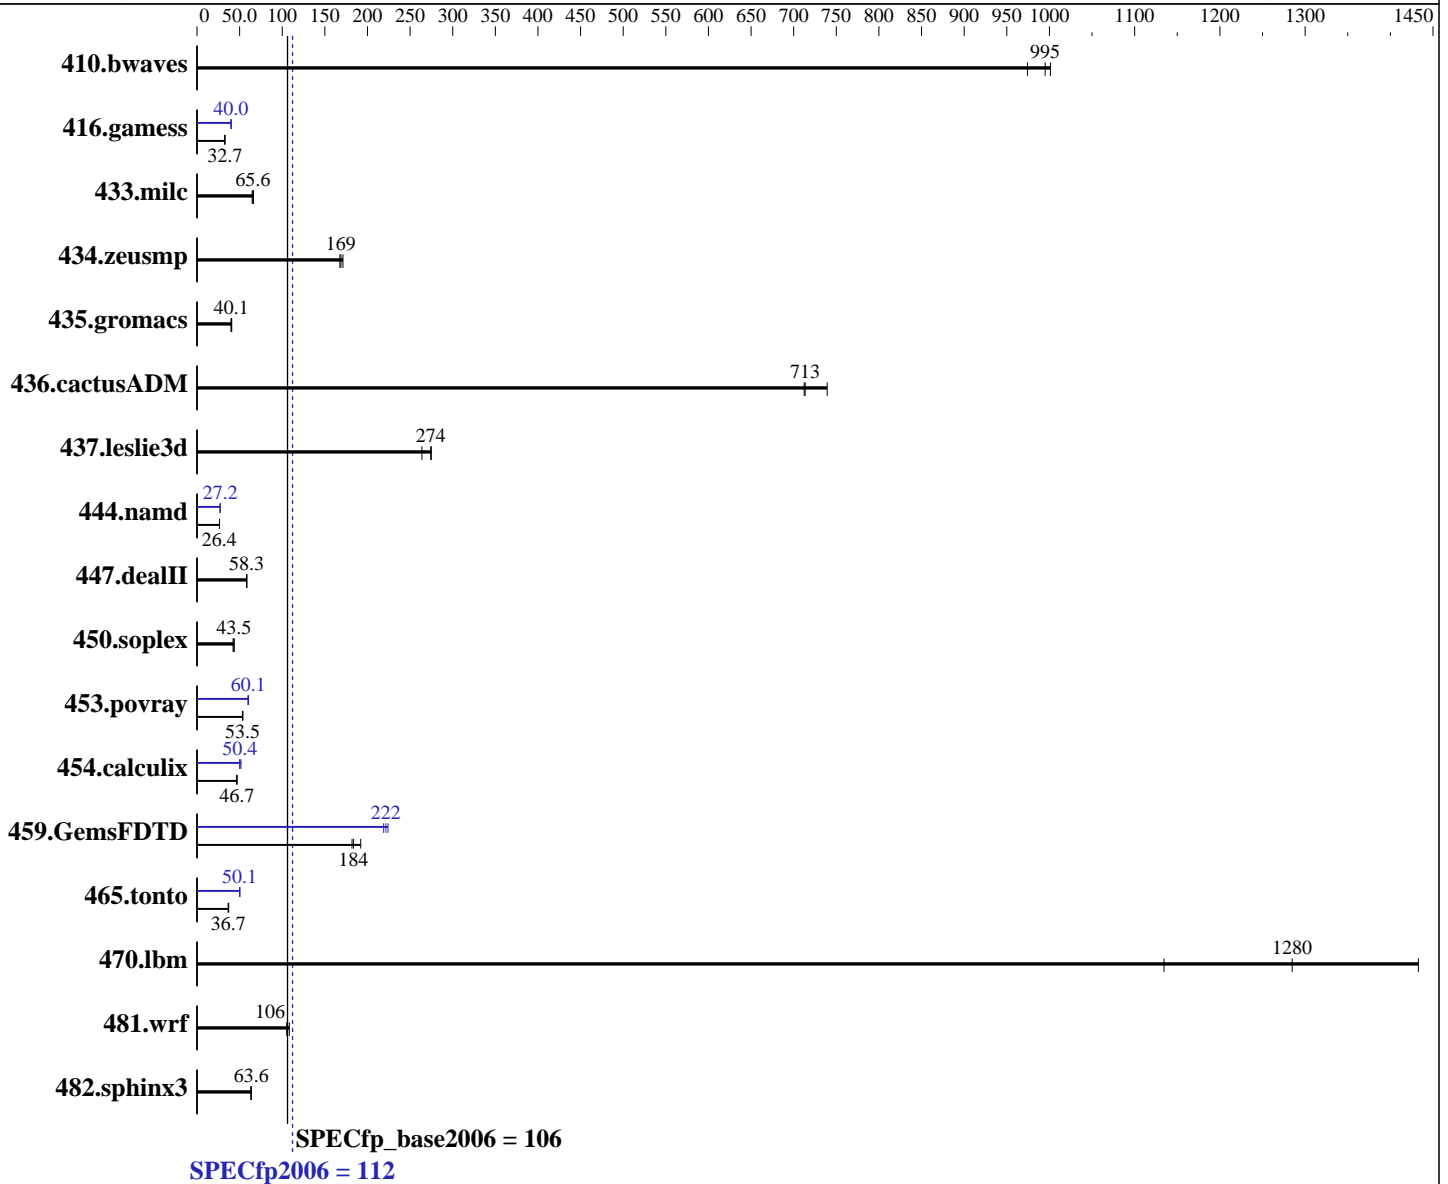

## Hardware

CPU Name: Intel Xeon E5-4669 v4  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.00 GHz  
 CPU MHz: 2200  
 FPU: Integrated  
 CPU(s) enabled: 88 cores, 4 chips, 22 cores/chip, 2 threads/core  
 CPU(s) orderable: 2,4 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

## Software

Operating System: SUSE Linux Enterprise Server 12 SP1  
 3.12.49-11-default  
 Compiler: C/C++: Version 16.0.0.101 of Intel C++ Studio XE  
 for Linux;  
 Fortran: Version 16.0.0.101 of Intel Fortran  
 Studio XE for Linux  
 Auto Parallel: Yes  
 File System: btrfs  
 System State: Run level 3 (multi-user)

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp2006 = 112

PowerEdge FC830 (Intel Xeon E5-4669 v4, 2.20 GHz)

SPECfp\_base2006 = 106

CPU2006 license: 55

Test date: Apr-2016

Test sponsor: Dell Inc.

Hardware Availability: Jun-2016

Tested by: Dell Inc.

Software Availability: Mar-2016

L3 Cache: 55 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 512 GB (32 x 16 GB 2Rx8 PC4-2400T-R)  
 Disk Subsystem: 1 x 800 GB SATA SSD  
 Other Hardware: None

Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: None

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	13.6	1000	13.9	974	<u>13.7</u>	<u>995</u>	13.6	1000	13.9	974	<u>13.7</u>	<u>995</u>
416.gamess	600	32.6	599	32.7	<u>599</u>	<u>32.7</u>	491	39.9	<u>489</u>	<u>40.0</u>	489	40.1
433.milc	139	66.3	<u>140</u>	<u>65.6</u>	142	64.7	139	66.3	<u>140</u>	<u>65.6</u>	142	64.7
434.zeusmp	54.3	168	53.1	171	<u>53.9</u>	<u>169</u>	54.3	168	53.1	171	<u>53.9</u>	<u>169</u>
435.gromacs	178	40.1	175	40.8	<u>178</u>	<u>40.1</u>	178	40.1	175	40.8	<u>178</u>	<u>40.1</u>
436.cactusADM	<u>16.7</u>	<u>713</u>	16.8	712	16.2	739	<u>16.7</u>	<u>713</u>	16.8	712	16.2	739
437.leslie3d	<u>34.3</u>	<u>274</u>	34.2	275	35.6	264	<u>34.3</u>	<u>274</u>	34.2	275	35.6	264
444.namd	304	26.4	<u>304</u>	<u>26.4</u>	304	26.4	295	27.2	295	27.2	<u>295</u>	<u>27.2</u>
447.dealII	196	58.4	196	58.3	<u>196</u>	<u>58.3</u>	196	58.4	196	58.3	<u>196</u>	<u>58.3</u>
450.soplex	<u>192</u>	<u>43.5</u>	192	43.5	197	42.3	<u>192</u>	<u>43.5</u>	192	43.5	197	42.3
453.povray	98.8	53.8	<u>99.5</u>	<u>53.5</u>	99.8	53.3	<u>88.5</u>	<u>60.1</u>	88.9	59.8	87.9	60.5
454.calculix	177	46.7	<u>177</u>	<u>46.7</u>	176	46.9	160	51.6	<u>164</u>	<u>50.4</u>	165	50.1
459.GemsFDTD	55.2	192	58.3	182	<u>57.8</u>	<u>184</u>	<u>47.9</u>	<u>222</u>	48.5	219	47.3	224
465.tonto	268	36.7	<u>268</u>	<u>36.7</u>	265	37.2	<u>196</u>	<u>50.1</u>	196	50.1	196	50.2
470.lbm	9.59	1430	12.1	1130	<u>10.7</u>	<u>1280</u>	9.59	1430	12.1	1130	<u>10.7</u>	<u>1280</u>
481.wrf	106	105	<u>105</u>	<u>106</u>	103	108	106	105	<u>105</u>	<u>106</u>	103	108
482.sphinx3	308	63.2	306	63.7	<u>307</u>	<u>63.6</u>	308	63.2	306	63.7	<u>307</u>	<u>63.6</u>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS settings:  
 Snoop Mode set to Opportunistic Snoop Broadcast  
 Virtualization Technology disabled  
 System Profile set to custom  
 CPU Performance set to Maximum Performance  
 C States set to Autonomous  
 C1E disabled  
 Energy Efficient Turbo disabled  
 Uncore Frequency set to Dynamic  
 Energy Efficiency Policy set to Performance

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp2006 = 112

PowerEdge FC830 (Intel Xeon E5-4669 v4, 2.20 GHz)

SPECfp\_base2006 = 106

CPU2006 license: 55

Test date: Apr-2016

Test sponsor: Dell Inc.

Hardware Availability: Jun-2016

Tested by: Dell Inc.

Software Availability: Mar-2016

## Platform Notes (Continued)

Memory Patrol Scrub disabled  
Sysinfo program /root/cpu2006-1.2/config/sysinfo.rev6914  
\$Rev: 6914 \$ \$Date:: 2014-06-25 # \$ e3fbb8667b5a285932ceab81e28219e1  
running on linux-4pvp Fri Apr 22 16:48:56 2016

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see: <http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-4669 v4 @ 2.20GHz
 4 "physical id"s (chips)
 176 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
cpu cores : 22
siblings : 44
physical 0: cores 0 1 2 3 4 5 8 9 10 11 12 16 17 18 19 20 21 24 25 26 27
28
physical 1: cores 0 1 2 3 4 5 8 9 10 11 12 16 17 18 19 20 21 24 25 26 27
28
physical 2: cores 0 1 2 3 4 5 8 9 10 11 12 16 17 18 19 20 21 24 25 26 27
28
physical 3: cores 0 1 2 3 4 5 8 9 10 11 12 16 17 18 19 20 21 24 25 26 27
28
cache size : 56320 KB
```

```
From /proc/meminfo
MemTotal: 529326748 kB
HugePages_Total: 0
Hugepagesize: 2048 kB
```

```
/usr/bin/lsb_release -d
SUSE Linux Enterprise Server 12 SP1
```

```
From /etc/*release* /etc/*version*
SuSE-release:
SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 1
# This file is deprecated and will be removed in a future service pack or
release.
# Please check /etc/os-release for details about this release.
os-release:
NAME="SLES"
VERSION="12-SP1"
VERSION_ID="12.1"
PRETTY_NAME="SUSE Linux Enterprise Server 12 SP1"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12:sp1"
```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp2006 = 112

PowerEdge FC830 (Intel Xeon E5-4669 v4, 2.20 GHz)

SPECfp\_base2006 = 106

CPU2006 license: 55

Test date: Apr-2016

Test sponsor: Dell Inc.

Hardware Availability: Jun-2016

Tested by: Dell Inc.

Software Availability: Mar-2016

## Platform Notes (Continued)

```
uname -a:
Linux linux-4pvp 3.12.49-11-default #1 SMP Wed Nov 11 20:52:43 UTC 2015
(8d714a0) x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Apr 22 11:18 last=5
```

```
SPEC is set to: /root/cpu2006-1.2
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda2       xfs   271G  14G  258G   5% /
```

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS Dell Inc. 2.0.2 04/14/2016

Memory:

```
5x 002C00B3002C 18ASF2G72PDZ-2G3A1 16 GB 2 rank 2400 MHz
19x 00AD00B300AD HMA82GR7MFR8N-UH 16 GB 2 rank 2400 MHz
8x 00AD063200AD HMA82GR7MFR8N-UH 16 GB 2 rank 2400 MHz
16x Not Specified Not Specified
```

(End of data from sysinfo program)

## General Notes

Environment variables set by runspec before the start of the run:

```
KMP_AFFINITY = "granularity=fine,compact,1,0"
LD_LIBRARY_PATH = "/root/cpu2006-1.2/libs/32:/root/cpu2006-1.2/libs/64:/root/cpu2006-1.2/sh"
OMP_NUM_THREADS = "88"
```

Binaries compiled on a system with 1x Intel Core i5-4670K CPU + 32GB memory using RedHat EL 7.1

Transparent Huge Pages enabled with:

```
echo always > /sys/kernel/mm/transparent_hugepage/enabled
```

## Base Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp2006 = 112

PowerEdge FC830 (Intel Xeon E5-4669 v4, 2.20 GHz)

SPECfp\_base2006 = 106

CPU2006 license: 55

Test date: Apr-2016

Test sponsor: Dell Inc.

Hardware Availability: Jun-2016

Tested by: Dell Inc.

Software Availability: Mar-2016

## Base Compiler Invocation (Continued)

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
 416.gamess: -DSPEC\_CPU\_LP64  
 433.milc: -DSPEC\_CPU\_LP64  
 434.zeusmp: -DSPEC\_CPU\_LP64  
 435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
 436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
 437.leslie3d: -DSPEC\_CPU\_LP64  
 444.namd: -DSPEC\_CPU\_LP64  
 447.dealII: -DSPEC\_CPU\_LP64  
 450.soplex: -DSPEC\_CPU\_LP64  
 453.povray: -DSPEC\_CPU\_LP64  
 454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
 459.GemsFDTD: -DSPEC\_CPU\_LP64  
 465.tonto: -DSPEC\_CPU\_LP64  
 470.lbm: -DSPEC\_CPU\_LP64  
 481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
 482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch  
-ansi-alias

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias

Fortran benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch

Benchmarks using both Fortran and C:

-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch  
-ansi-alias

## Peak Compiler Invocation

C benchmarks:

icc -m64

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp2006 = 112

PowerEdge FC830 (Intel Xeon E5-4669 v4, 2.20 GHz)

SPECfp\_base2006 = 106

CPU2006 license: 55

Test date: Apr-2016

Test sponsor: Dell Inc.

Hardware Availability: Jun-2016

Tested by: Dell Inc.

Software Availability: Mar-2016

## Peak Compiler Invocation (Continued)

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -fno-alias  
-auto-ilp32

447.dealIII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll4  
-ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll2  
-inline-level=0 -scalar-rep-

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp2006 = 112

PowerEdge FC830 (Intel Xeon E5-4669 v4, 2.20 GHz)

SPECfp\_base2006 = 106

CPU2006 license: 55

Test date: Apr-2016

Test sponsor: Dell Inc.

Hardware Availability: Jun-2016

Tested by: Dell Inc.

Software Availability: Mar-2016

## Peak Optimization Flags (Continued)

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll2  
-inline-level=0 -opt-prefetch -parallel

465.tonto: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -inline-calloc  
-opt-malloc-options=3 -auto -unroll4

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revD.20151006.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revD.20151006.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Tue Jun 28 17:29:55 2016 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 28 June 2016.