



# SPEC® CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY CX2550 M2, Intel Xeon E5-2630L v4, 1.80 GHz

**SPECfp®2006 = 105**  
**SPECfp\_base2006 = 98.4**

CPU2006 license: 19


Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Jul-2016

Hardware Availability: Apr-2016

Software Availability: Sep-2015

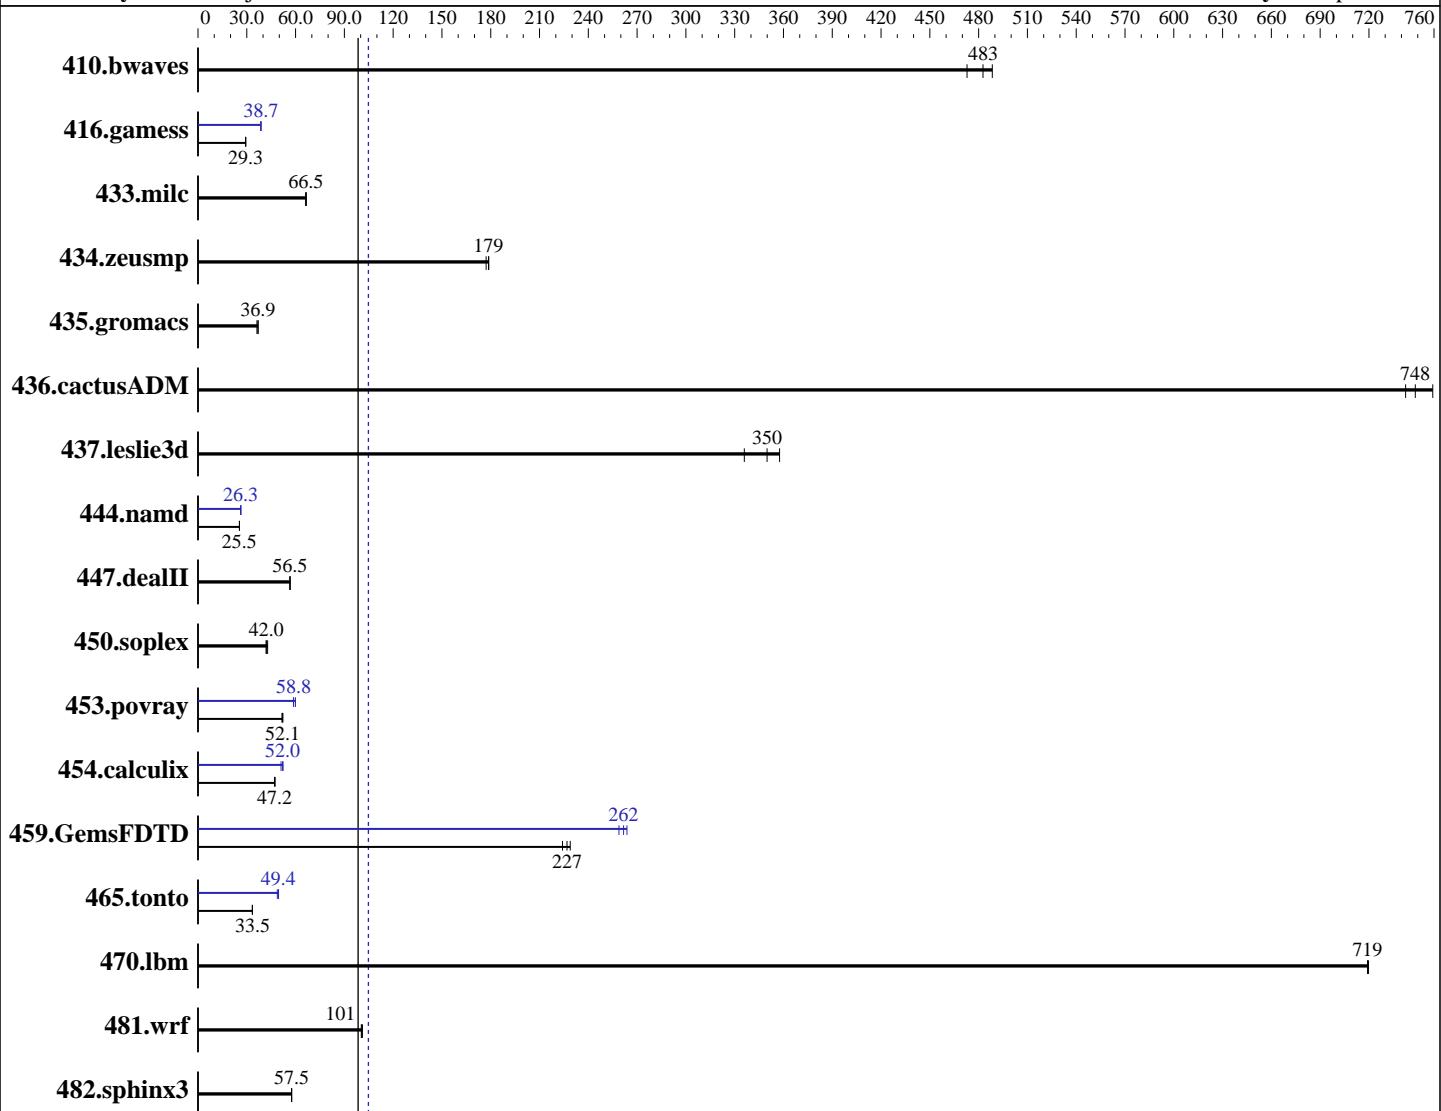

**SPECfp\_base2006 = 98.4**

**SPECfp2006 = 105**

## Hardware

CPU Name: Intel Xeon E5-2630L v4  
CPU Characteristics: Intel Turbo Boost Technology up to 2.90 GHz  
CPU MHz: 1800  
FPU: Integrated  
CPU(s) enabled: 20 cores, 2 chips, 10 cores/chip, 2 threads/core  
CPU(s) orderable: 1,2 chip  
Primary Cache: 32 KB I + 32 KB D on chip per core  
Secondary Cache: 256 KB I+D on chip per core

## Software

Operating System: SUSE Linux Enterprise Server 12 SP1 (x86\_64)  
Compiler: Kernel 3.12.49-11-default  
C/C++: Version 16.0.0.101 of Intel C++ Studio XE for Linux;  
Fortran: Version 16.0.0.101 of Intel Fortran Studio XE for Linux  
Auto Parallel: Yes  
File System: xfs  
System State: Run level 3 (multi-user)

Continued on next page

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY CX2550 M2, Intel Xeon E5-2630L v4, 1.80 GHz

**SPECfp2006 = 105**

**SPECfp\_base2006 = 98.4**

**CPU2006 license:** 19

**Test sponsor:** Fujitsu

**Tested by:** Fujitsu

**Test date:** Jul-2016

**Hardware Availability:** Apr-2016

**Software Availability:** Sep-2015

L3 Cache: 25 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 256 GB (16 x 16 GB 2Rx4 PC4-2400T-R, running at 2133 MHz)  
 Disk Subsystem: 1 x SATA, 1000 GB, 7200 RPM  
 Other Hardware: None

Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: None

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio										
410.bwaves	28.7	473	<u>28.2</u>	<u>483</u>	27.8	488	28.7	473	<u>28.2</u>	<u>483</u>	27.8	488
416.gamess	667	29.4	<u>668</u>	<u>29.3</u>	669	29.2	506	38.7	507	38.6	<u>506</u>	<u>38.7</u>
433.milc	138	66.5	139	66.2	<u>138</u>	<u>66.5</u>	138	66.5	139	66.2	<u>138</u>	<u>66.5</u>
434.zeusmp	51.4	177	50.9	179	<u>50.9</u>	<u>179</u>	51.4	177	50.9	179	<u>50.9</u>	<u>179</u>
435.gromacs	<u>193</u>	<u>36.9</u>	197	36.2	193	36.9	<u>193</u>	<u>36.9</u>	197	36.2	193	36.9
436.cactusADM	16.1	743	15.7	759	<u>16.0</u>	<u>748</u>	16.1	743	15.7	759	<u>16.0</u>	<u>748</u>
437.leslie3d	<u>26.9</u>	<u>350</u>	28.0	336	26.3	358	<u>26.9</u>	<u>350</u>	28.0	336	26.3	358
444.namd	315	25.5	314	25.5	<u>314</u>	<u>25.5</u>	305	26.3	<u>305</u>	<u>26.3</u>	305	26.3
447.dealII	<u>202</u>	<u>56.5</u>	202	56.5	202	56.7	<u>202</u>	<u>56.5</u>	202	56.5	202	56.7
450.soplex	199	41.9	<u>199</u>	<u>42.0</u>	195	42.8	199	41.9	<u>199</u>	<u>42.0</u>	195	42.8
453.povray	102	52.1	103	51.6	<u>102</u>	<u>52.1</u>	<u>90.4</u>	<u>58.8</u>	88.8	59.9	90.6	58.7
454.calculix	174	47.3	<u>175</u>	<u>47.2</u>	175	47.2	158	52.3	162	51.1	<u>159</u>	<u>52.0</u>
459.GemsFDTD	<u>46.8</u>	<u>227</u>	46.4	229	47.3	224	40.2	264	<u>40.5</u>	<u>262</u>	41.0	259
465.tonto	294	33.5	<u>294</u>	<u>33.5</u>	295	33.3	202	48.8	199	49.5	<u>199</u>	<u>49.4</u>
470.lbm	<u>19.1</u>	<u>719</u>	19.1	720	19.1	719	<u>19.1</u>	<u>719</u>	19.1	720	19.1	719
481.wrf	<u>111</u>	<u>101</u>	111	100	110	101	<u>111</u>	<u>101</u>	111	100	110	101
482.sphinx3	339	57.5	338	57.6	<u>339</u>	<u>57.5</u>	339	57.5	338	57.6	<u>339</u>	<u>57.5</u>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS configuration:

Energy Performance = Performance

Utilization Profile = Unbalanced

QPI snoop mode: Home Snoop

COD Enable = Disabled, Early Snoop = Disabled, Home Snoop Dir OSB = Disabled

CPU C1E Support = Disabled

Sysinfo program /home/SPECcpu2006/config/sysinfo.rev6914

\$Rev: 6914 \$ \$Date::: 2014-06-25 ## e3fbb8667b5a285932ceab81e28219e1

running on CX2550M2 Thu Jul 7 08:58:14 2016

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY CX2550 M2, Intel Xeon E5-2630L v4, 1.80 GHz

**SPECfp2006 = 105**

**SPECfp\_base2006 = 98.4**

**CPU2006 license:** 19

**Test date:** Jul-2016

**Test sponsor:** Fujitsu

**Hardware Availability:** Apr-2016

**Tested by:** Fujitsu

**Software Availability:** Sep-2015

## Platform Notes (Continued)

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-2630L v4 @ 1.80GHz
        2 "physical id"s (chips)
        40 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
    cpu cores : 10
    siblings : 20
    physical 0: cores 0 1 2 3 4 8 9 10 11 12
    physical 1: cores 0 1 2 3 4 8 9 10 11 12
cache size : 25600 KB
```

```
From /proc/meminfo
MemTotal:      264319700 kB
HugePages_Total:       0
Hugepagesize:     2048 kB
```

```
/usr/bin/lsb_release -d
SUSE Linux Enterprise Server 12 SP1
```

```
From /etc/*release* /etc/*version*
SuSE-release:
    SUSE Linux Enterprise Server 12 (x86_64)
    VERSION = 12
    PATCHLEVEL = 1
    # This file is deprecated and will be removed in a future service pack or
    release.
    # Please check /etc/os-release for details about this release.
os-release:
    NAME="SLES"
    VERSION="12-SP1"
    VERSION_ID="12.1"
    PRETTY_NAME="SUSE Linux Enterprise Server 12 SP1"
    ID="sles"
    ANSI_COLOR="0;32"
    CPE_NAME="cpe:/o:suse:sles:12:sp1"
```

```
uname -a:
Linux CX2550M2 3.12.49-11-default #1 SMP Wed Nov 11 20:52:43 UTC 2015
(8d714a0) x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Jul 7 08:57 last=5
```

```
SPEC is set to: /home/SPECcpu2006
Filesystem      Type  Size  Used  Avail Use% Mounted on
/dev/sda3        xfs   890G   75G  815G   9%  /home
Continued on next page
```



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY CX2550 M2, Intel Xeon E5-2630L v4, 1.80 GHz

**SPECfp2006 = 105**

**SPECfp\_base2006 = 98.4**

**CPU2006 license:** 19

**Test sponsor:** Fujitsu

**Tested by:** Fujitsu

**Test date:** Jul-2016

**Hardware Availability:** Apr-2016

**Software Availability:** Sep-2015

## Platform Notes (Continued)

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS FUJITSU // American Megatrends Inc. V5.0.0.11 R1.4.0 for D3343-B1x  
03/17/2016

Memory:

16x Hyundai Electronics (Hynix) HMA42GR7AFR4N-UH 16 GB 2 rank 2133 MHz

(End of data from sysinfo program)

## General Notes

Environment variables set by runspec before the start of the run:

KMP\_AFFINITY = "granularity=fine,compact,1,0"

LD\_LIBRARY\_PATH = "/home/SPECcpu2006/libs/32:/home/SPECcpu2006/libs/64:/home/SPECcpu2006/sh"

OMP\_NUM\_THREADS = "20"

Binaries compiled on a system with 1x Intel Core i5-4670K CPU + 32GB memory using RedHat EL 7.1

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/transparent\_hugepage/enabled

For information about Fujitsu please visit: <http://www.fujitsu.com>

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64

416.gamess: -DSPEC\_CPU\_LP64

433.milc: -DSPEC\_CPU\_LP64

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY CX2550 M2, Intel Xeon E5-2630L v4, 1.80 GHz

**SPECfp2006 = 105**

**SPECfp\_base2006 = 98.4**

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Jul-2016

Hardware Availability: Apr-2016

Software Availability: Sep-2015

## Base Portability Flags (Continued)

```
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64
```

## Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch
-ansi-alias
```

C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias
```

Fortran benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch
```

Benchmarks using both Fortran and C:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch
-ansi-alias
```

## Peak Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY CX2550 M2, Intel Xeon E5-2630L v4, 1.80 GHz

**SPECfp2006 = 105**

**SPECfp\_base2006 = 98.4**

**CPU2006 license:** 19

**Test sponsor:** Fujitsu

**Tested by:** Fujitsu

**Test date:** Jul-2016

**Hardware Availability:** Apr-2016

**Software Availability:** Sep-2015

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

```
444.namd: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
           -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
           -par-num-threads=1(pass 1) -prof-use(pass 2) -fno-alias
           -auto-ilp32
```

447.dealII: basepeak = yes

450.soplex: basepeak = yes

```
453.povray: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
            -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
            -par-num-threads=1(pass 1) -prof-use(pass 2) -unroll14
            -ansi-alias
```

Fortran benchmarks:

410.bwaves: basepeak = yes

```
416.gamess: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
             -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
             -par-num-threads=1(pass 1) -prof-use(pass 2) -unroll12
             -inline-level=0 -scalar-rep-
```

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

```
459.GemsFDTD: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
                -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
                -par-num-threads=1(pass 1) -prof-use(pass 2) -unroll12
                -inline-level=0 -opt-prefetch -parallel
```

```
465.tonto: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
            -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
            -par-num-threads=1(pass 1) -prof-use(pass 2) -inline-calloc
```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY CX2550 M2, Intel Xeon E5-2630L v4, 1.80 GHz

**SPECfp2006 = 105**

**SPECfp\_base2006 = 98.4**

**CPU2006 license:** 19

**Test sponsor:** Fujitsu

**Tested by:** Fujitsu

**Test date:** Jul-2016

**Hardware Availability:** Apr-2016

**Software Availability:** Sep-2015

## Peak Optimization Flags (Continued)

465.tonto (continued):

-opt-malloc-options=3 -auto -unroll14

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Fujitsu-Platform-Settings-V1.2-BDW-RevB.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Fujitsu-Platform-Settings-V1.2-BDW-RevB.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Tue Sep 6 16:55:32 2016 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 6 September 2016.