



# SPEC® CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## Lenovo Group Limited

Lenovo ThinkServer RD650  
(1.70 GHz, Intel Xeon E5-2603 v4)

**SPECint\_rate2006 = 322**

**SPECint\_rate\_base2006 = 309**

CPU2006 license: 9017


Test sponsor: Lenovo Group Limited

Tested by: Lenovo Group Limited

**Test date:** Aug-2016

**Hardware Availability:** Mar-2016

**Software Availability:** Dec-2015

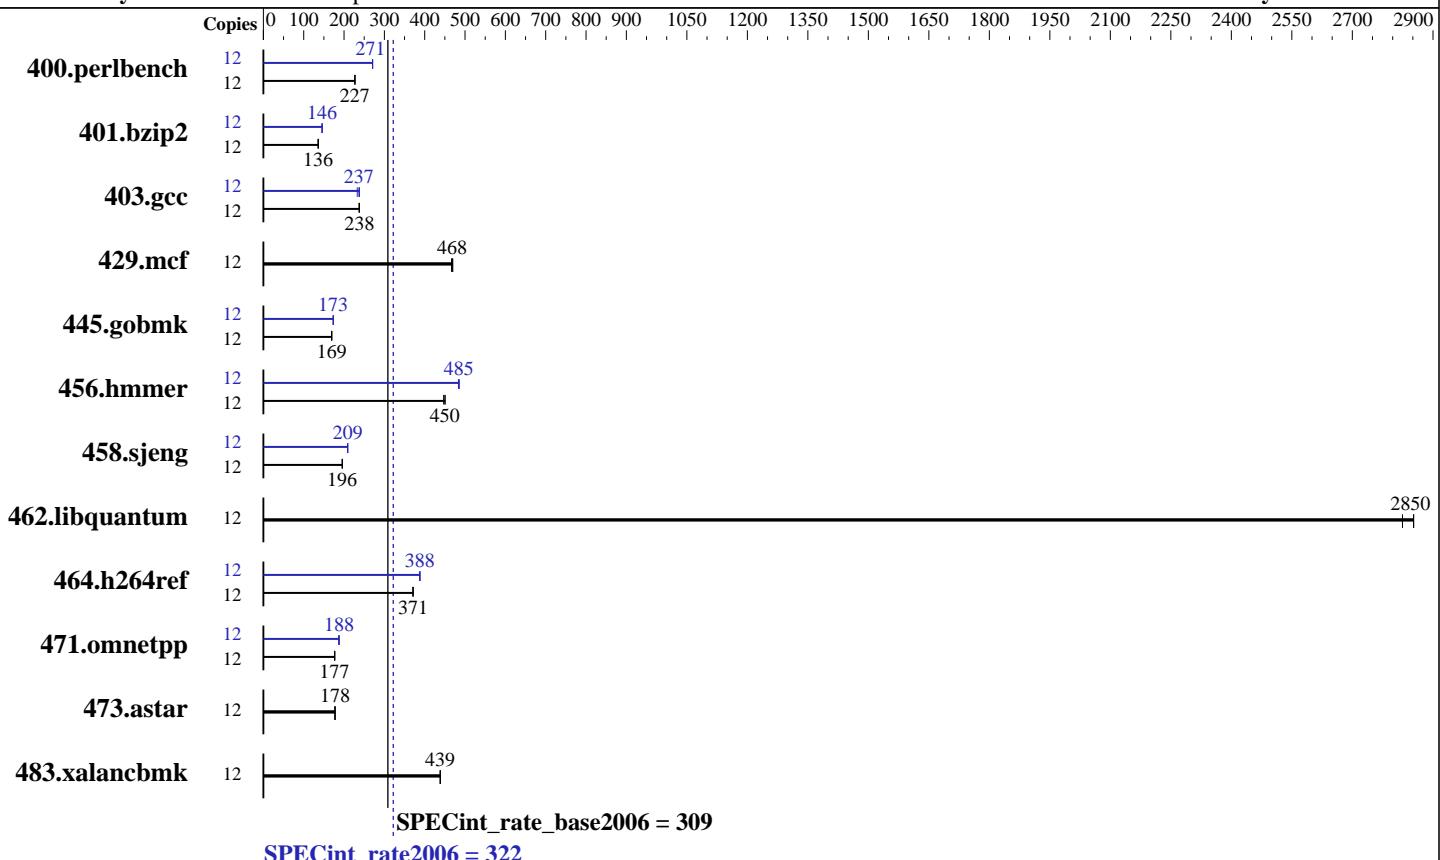

Hardware		Software	
CPU Name:	Intel Xeon E5-2603 v4	Operating System:	SUSE Linux Enterprise Server 12 SP1 (x86_64) Kernel 3.12.49-11-default
CPU Characteristics:		Compiler:	C/C++: Version 16.0.0.101 of Intel C++ Studio XE for Linux
CPU MHz:	1700	Auto Parallel:	No
FPU:	Integrated	File System:	xfs
CPU(s) enabled:	12 cores, 2 chips, 6 cores/chip	System State:	Run level 3 (multi-user)
CPU(s) orderable:	1,2 chip	Base Pointers:	32-bit
Primary Cache:	32 KB I + 32 KB D on chip per core	Peak Pointers:	32/64-bit
Secondary Cache:	256 KB I+D on chip per core	Other Software:	Microquill SmartHeap V10.2
L3 Cache:	15 MB I+D on chip per chip		
Other Cache:	None		
Memory:	256 GB (16 x 16 GB 2Rx4 PC4-2400T-R, running at 1866 MHz)		
Disk Subsystem:	1 x 800 GB SATA SSD		
Other Hardware:	None		



# SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## Lenovo Group Limited

Lenovo ThinkServer RD650  
(1.70 GHz, Intel Xeon E5-2603 v4)

**SPECint\_rate2006 = 322**

**SPECint\_rate\_base2006 = 309**

CPU2006 license: 9017

Test date: Aug-2016

Test sponsor: Lenovo Group Limited

Hardware Availability: Mar-2016

Tested by: Lenovo Group Limited

Software Availability: Dec-2015

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	12	516	227	<b>516</b>	<b>227</b>	517	227	12	<b>433</b>	<b>271</b>	433	271	433	271
401.bzip2	12	851	136	852	136	<b>852</b>	<b>136</b>	12	<b>795</b>	<b>146</b>	795	146	796	145
403.gcc	12	405	238	407	237	<b>406</b>	<b>238</b>	12	415	233	<b>408</b>	<b>237</b>	405	238
429.mcf	12	235	467	<b>234</b>	<b>468</b>	233	470	12	235	467	<b>234</b>	<b>468</b>	233	470
445.gobmk	12	744	169	742	170	<b>743</b>	<b>169</b>	12	727	173	<b>727</b>	<b>173</b>	727	173
456.hammer	12	251	447	248	451	<b>249</b>	<b>450</b>	12	231	486	<b>231</b>	<b>485</b>	231	484
458.sjeng	12	742	196	<b>742</b>	<b>196</b>	742	196	12	694	209	695	209	<b>695</b>	<b>209</b>
462.libquantum	12	87.2	2850	<b>87.2</b>	<b>2850</b>	88.0	2820	12	87.2	2850	<b>87.2</b>	<b>2850</b>	88.0	2820
464.h264ref	12	<b>716</b>	<b>371</b>	715	371	716	371	12	686	387	<b>684</b>	<b>388</b>	684	388
471.omnetpp	12	423	177	<b>425</b>	<b>177</b>	425	177	12	399	188	402	187	<b>400</b>	<b>188</b>
473.astar	12	<b>474</b>	<b>178</b>	476	177	473	178	12	<b>474</b>	<b>178</b>	476	177	473	178
483.xalancbmk	12	189	438	<b>189</b>	<b>439</b>	189	439	12	189	438	<b>189</b>	<b>439</b>	189	439

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Transparent Huge Pages enabled with:

```
echo always > /sys/kernel/mm/transparent_hugepage/enabled
```

Filesystem page cache cleared with:

```
echo 1 > /proc/sys/vm/drop_caches
```

## Platform Notes

BIOS Configuration:

Early Snoop set to Disabled

Performance Profile set to Custom

C1E Support set to Disabled

Core C3 set to Disabled

Core C6 set to Disabled

Thermal Profile set to High Fan Speed

Memory Power Savings set to Disabled

Sysinfo program /home/cpu2006-1.2-ic16.0/config/sysinfo.rev6914

\$Rev: 6914 \$ \$Date::: 2014-06-25 ## e3ffb8667b5a285932ceab81e28219e1

running on RD650-MLK Tue Aug 23 10:56:14 2016

This section contains SUT (System Under Test) info as seen by

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## Lenovo Group Limited

Lenovo ThinkServer RD650  
(1.70 GHz, Intel Xeon E5-2603 v4)

**SPECint\_rate2006 = 322**

**SPECint\_rate\_base2006 = 309**

**CPU2006 license:** 9017

**Test date:** Aug-2016

**Test sponsor:** Lenovo Group Limited

**Hardware Availability:** Mar-2016

**Tested by:** Lenovo Group Limited

**Software Availability:** Dec-2015

## Platform Notes (Continued)

some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
    model name : Intel(R) Xeon(R) CPU E5-2603 v4@ 1.70GHz
        2 "physical id"s (chips)
        12 "processors"
    cores, siblings (Caution: counting these is hw and system dependent. The
    following excerpts from /proc/cpuinfo might not be reliable. Use with
    caution.)
        cpu cores : 6
        siblings   : 6
        physical 0: cores 0 1 2 3 4 5
        physical 1: cores 0 1 2 3 4 5
    cache size : 15360 KB
```

```
From /proc/meminfo
    MemTotal:      264558640 kB
    HugePages_Total:       0
    Hugepagesize:     2048 kB
```

```
From /etc/*release* /etc/*version*
SuSE-release:
    SUSE Linux Enterprise Server 12 (x86_64)
    VERSION = 12
    PATCHLEVEL = 1
    # This file is deprecated and will be removed in a future service pack or
    release.
    # Please check /etc/os-release for details about this release.
os-release:
    NAME="SLES"
    VERSION="12-SP1"
    VERSION_ID="12.1"
    PRETTY_NAME="SUSE Linux Enterprise Server 12 SP1"
    ID="sles"
    ANSI_COLOR="0;32"
    CPE_NAME="cpe:/o:suse:sles:12:sp1"
```

```
uname -a:
Linux RD650-MLK 3.12.49-11-default #1 SMP Wed Nov 11 20:52:43 UTC 2015
(8d714a0) x86_64 x86_64 x86_64 GNU/Linux
```

run-level 3 Aug 23 10:54

```
SPEC is set to: /home/cpu2006-1.2-ic16.0
Filesystem      Type  Size Used Avail Use% Mounted on
/dev/sda3        xfs   691G  8.0G  683G   2% /home
Additional information from dmidecode:
```

Warning: Use caution when you interpret this section. The 'dmidecode' program  
reads system data which is "intended to allow hardware to be accurately  
determined", but the intent may not be met, as there are frequent changes to  
Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## Lenovo Group Limited

Lenovo ThinkServer RD650  
(1.70 GHz, Intel Xeon E5-2603 v4)

**SPECint\_rate2006 = 322**

**SPECint\_rate\_base2006 = 309**

**CPU2006 license:** 9017

**Test date:** Aug-2016

**Test sponsor:** Lenovo Group Limited

**Hardware Availability:** Mar-2016

**Tested by:** Lenovo Group Limited

**Software Availability:** Dec-2015

## Platform Notes (Continued)

hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS LENOVO PB1TS362 03/24/2016

Memory:

16x Hynix Semiconductor HMA42GR7AFR4N-UH 16 GB 2 rank 2400 MHz, configured at 1866 MHz  
8x NO DIMM NO DIMM

(End of data from sysinfo program)

## General Notes

Environment variables set by runspec before the start of the run:

LD\_LIBRARY\_PATH = "/home/cpu2006-1.2-ic16.0/libs/32:/home/cpu2006-1.2-ic16.0/libs/64:/home/cpu2006-1.2-ic16.0/sh"

Binaries compiled on a system with 1x Intel Core i5-4670K CPU + 32GB memory using RedHat EL 7.1

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/transparent\_hugepage/enabled

Filesystem page cache cleared with:

echo 1> /proc/sys/vm/drop\_caches

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

## Base Compiler Invocation

C benchmarks:

icc -m32 -L/opt/intel/compilers\_and\_libraries\_2016/linux/compiler/lib/ia32\_lin

C++ benchmarks:

icpc -m32 -L/opt/intel/compilers\_and\_libraries\_2016/linux/compiler/lib/ia32\_lin

## Base Portability Flags

400.perlbench: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LINUX\_IA32  
401.bzip2: -D\_FILE\_OFFSET\_BITS=64  
403.gcc: -D\_FILE\_OFFSET\_BITS=64  
429.mcf: -D\_FILE\_OFFSET\_BITS=64  
445.gobmk: -D\_FILE\_OFFSET\_BITS=64  
456.hmmmer: -D\_FILE\_OFFSET\_BITS=64  
458.sjeng: -D\_FILE\_OFFSET\_BITS=64  
462.libquantum: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LINUX  
464.h264ref: -D\_FILE\_OFFSET\_BITS=64  
471.omnetpp: -D\_FILE\_OFFSET\_BITS=64  
473.astar: -D\_FILE\_OFFSET\_BITS=64  
483.xalancbmk: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LINUX



# SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## Lenovo Group Limited

Lenovo ThinkServer RD650  
(1.70 GHz, Intel Xeon E5-2603 v4)

**SPECint\_rate2006 = 322**

**SPECint\_rate\_base2006 = 309**

**CPU2006 license:** 9017

**Test sponsor:** Lenovo Group Limited

**Tested by:** Lenovo Group Limited

**Test date:** Aug-2016

**Hardware Availability:** Mar-2016

**Software Availability:** Dec-2015

## Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch  
-opt-mem-layout-trans=3
```

C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch  
-opt-mem-layout-trans=3 -Wl,-z,muldefs -L/sh -lsmartheap
```

## Base Other Flags

C benchmarks:

```
403.gcc: -Dalloca=_alloca
```

## Peak Compiler Invocation

C benchmarks (except as noted below):

```
icc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin
```

400.perlbench: icc -m64

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

C++ benchmarks:

```
icpc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin
```

## Peak Portability Flags

400.perlbench: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64

401.bzip2: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LP64

403.gcc: -D\_FILE\_OFFSET\_BITS=64

429.mcf: -D\_FILE\_OFFSET\_BITS=64

445.gobmk: -D\_FILE\_OFFSET\_BITS=64

456.hmmer: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LP64

458.sjeng: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LP64

462.libquantum: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LINUX

464.h264ref: -D\_FILE\_OFFSET\_BITS=64

471.omnetpp: -D\_FILE\_OFFSET\_BITS=64

473.astar: -D\_FILE\_OFFSET\_BITS=64

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## Lenovo Group Limited

Lenovo ThinkServer RD650  
(1.70 GHz, Intel Xeon E5-2603 v4)

**SPECint\_rate2006 = 322**

**SPECint\_rate\_base2006 = 309**

**CPU2006 license:** 9017

**Test sponsor:** Lenovo Group Limited

**Tested by:** Lenovo Group Limited

**Test date:** Aug-2016

**Hardware Availability:** Mar-2016

**Software Availability:** Dec-2015

## Peak Portability Flags (Continued)

483.xalancbmk: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -auto-ilp32

401.bzip2: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -opt-prefetch  
-auto-ilp32 -ansi-alias

403.gcc: -xCORE-AVX2 -ipo -O3 -no-prec-div

429.mcf: basepeak = yes

445.gobmk: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-prof-use(pass 2) -par-num-threads=1(pass 1) -ansi-alias  
-opt-mem-layout-trans=3

456.hmmer: -xCORE-AVX2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32

458.sjeng: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll4  
-auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll2  
-ansi-alias

C++ benchmarks:

471.omnetpp: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -ansi-alias  
-opt-ra-region-strategy=block -Wl,-z,muldefs  
-L/sh -lsmartheap

473.astar: basepeak = yes

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## Lenovo Group Limited

Lenovo ThinkServer RD650  
(1.70 GHz, Intel Xeon E5-2603 v4)

**SPECint\_rate2006 = 322**

**SPECint\_rate\_base2006 = 309**

**CPU2006 license:** 9017

**Test date:** Aug-2016

**Test sponsor:** Lenovo Group Limited

**Hardware Availability:** Mar-2016

**Tested by:** Lenovo Group Limited

**Software Availability:** Dec-2015

## Peak Optimization Flags (Continued)

483.xalancbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Lenovo-Platform-Settings-V1.2-BDW-revC.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Lenovo-Platform-Settings-V1.2-BDW-revC.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Tue Sep 20 15:06:56 2016 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 20 September 2016.