



SPEC® CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Lenovo Group Limited

SPECfp®2006 = 108

Lenovo ThinkServer TS150
(3.90 GHz, Intel Xeon E3-1280 v6)

SPECfp_base2006 = 106

CPU2006 license: 9017


Test date: Mar-2017

Test sponsor: Lenovo Group Limited

Hardware Availability: Apr-2017

Tested by: Lenovo Group Limited

Software Availability: Nov-2016

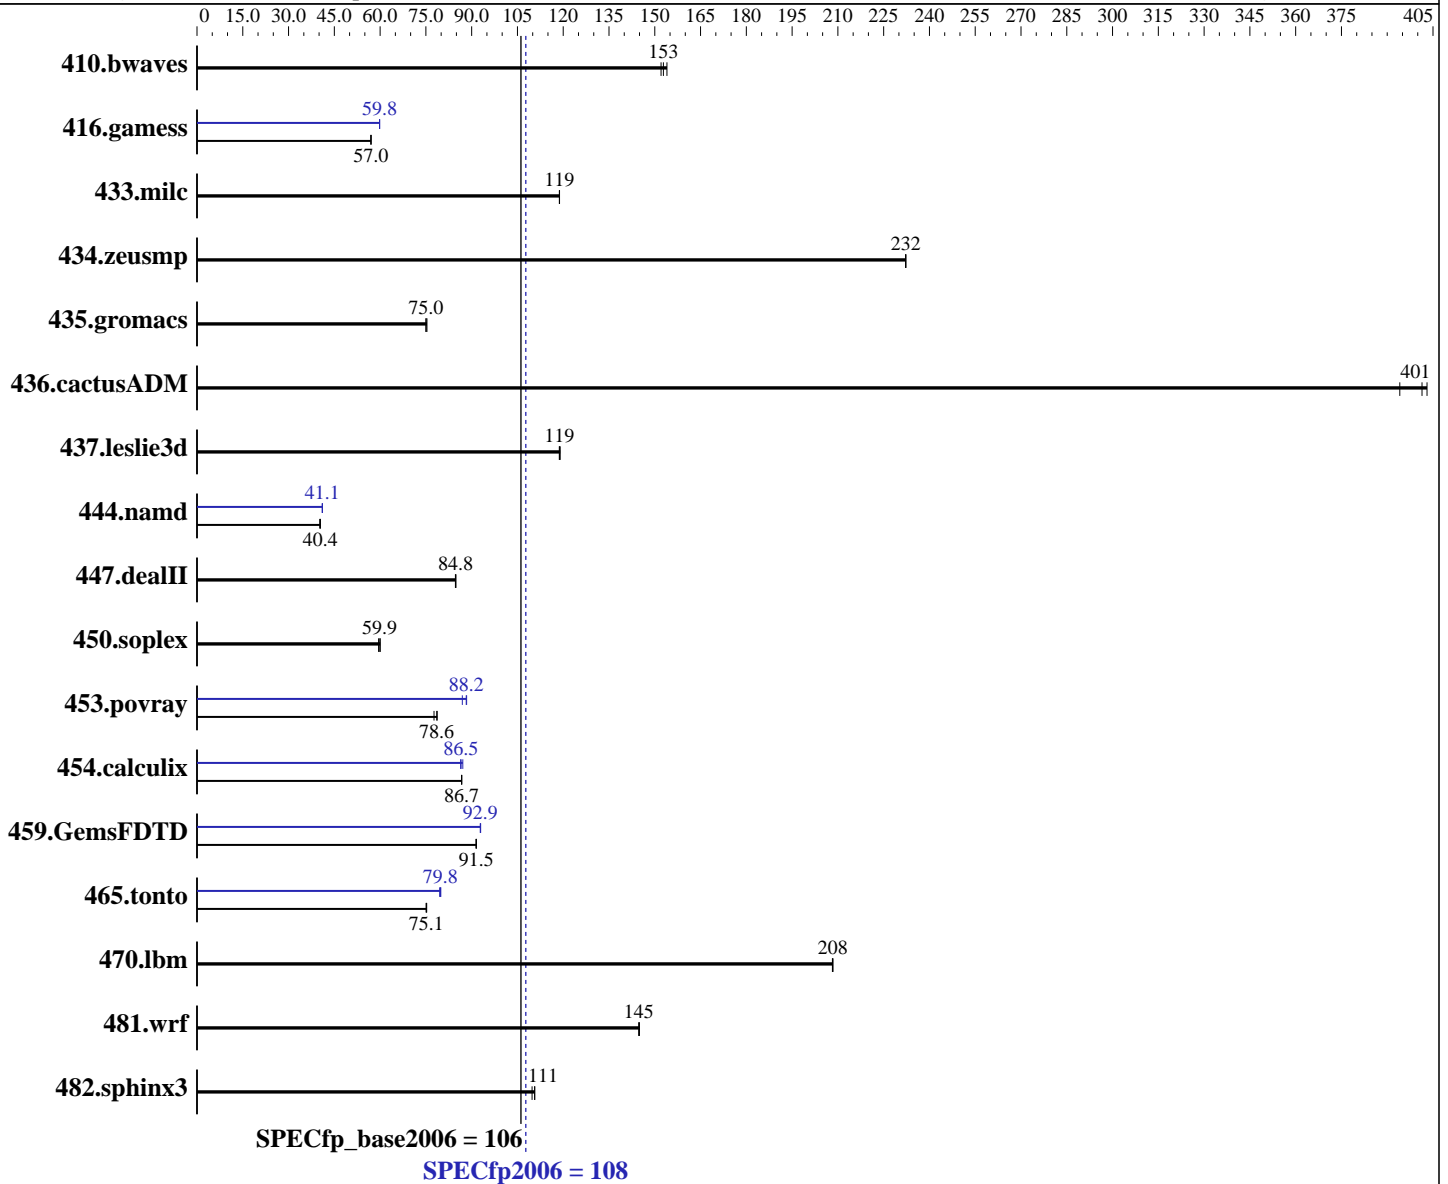

Hardware

CPU Name: Intel Xeon E3-1280 v6
 CPU Characteristics: Intel Turbo Boost Technology up to 4.20 GHz
 CPU MHz: 3900
 FPU: Integrated
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip
 CPU(s) orderable: 1 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: Red Hat Enterprise Linux Server release 7.3 (Maipo)
 Kernel 3.10.0-514.el7.x86_64
 Compiler: C/C++: Version 17.0.0.098 of Intel C/C++ Compiler for Linux;
 Fortran: Version 17.0.0.098 of Intel Fortran Compiler for Linux
 Auto Parallel: Yes
 File System: xfs

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Lenovo Group Limited

SPECfp2006 = **108**

Lenovo ThinkServer TS150
(3.90 GHz, Intel Xeon E3-1280 v6)

SPECfp_base2006 = **106**

CPU2006 license: 9017

Test date: Mar-2017

Test sponsor: Lenovo Group Limited

Hardware Availability: Apr-2017

Tested by: Lenovo Group Limited

Software Availability: Nov-2016

L3 Cache: 8 MB I+D on chip per chip
Other Cache: None
Memory: 64 GB (4 x 16 GB 2Rx8 PC4-2400T-U)
Disk Subsystem: 1 x 800 GB SATA SSD
Other Hardware: None

System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	89.4	152	88.9	153	88.3	154	89.4	152	88.9	153	88.3	154
416.gamess	344	57.0	343	57.0	343	57.0	327	59.8	327	59.8	327	59.8
433.milc	77.3	119	77.3	119	77.3	119	77.3	119	77.3	119	77.3	119
434.zeusmp	39.2	232	39.2	232	39.2	232	39.2	232	39.2	232	39.2	232
435.gromacs	94.8	75.3	95.2	75.0	95.1	75.0	94.8	75.3	95.2	75.0	95.1	75.0
436.cactusADM	30.3	394	29.8	401	29.6	403	30.3	394	29.8	401	29.6	403
437.leslie3d	79.1	119	79.0	119	79.2	119	79.1	119	79.0	119	79.2	119
444.namd	199	40.4	198	40.4	199	40.2	195	41.1	195	41.1	195	41.1
447.dealII	135	84.7	135	84.8	135	84.8	135	84.7	135	84.8	135	84.8
450.soplex	140	59.5	139	60.0	139	59.9	140	59.5	139	60.0	139	59.9
453.povray	67.7	78.6	67.6	78.7	68.5	77.7	60.2	88.3	60.3	88.2	61.2	86.9
454.calculix	95.1	86.7	95.1	86.7	95.1	86.7	94.7	87.1	95.3	86.5	95.5	86.4
459.GemsFDTD	116	91.4	116	91.5	116	91.5	114	92.9	114	92.8	114	92.9
465.tonto	131	75.1	131	75.1	131	75.3	123	79.9	123	79.8	124	79.5
470.lbm	66.0	208	65.9	208	66.0	208	66.0	208	65.9	208	66.0	208
481.wrf	77.2	145	77.1	145	77.1	145	77.2	145	77.1	145	77.1	145
482.sphinx3	178	110	176	111	176	111	178	110	176	111	176	111

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
Transparent Huge Pages enabled with:
echo always > /sys/kernel/mm/transparent_hugepage/enabled
Filesystem page cache cleared with:
echo 1> /proc/sys/vm/drop_caches
```

Platform Notes

```
BIOS configuration:
Hyper-Threading set to Disabled
Intel Virtualization Technology set to Enabled
VT-d set to Enabled
ICE Performance Mode set to Full Speed
Sysinfo program /home/cpu2006-1.2-ic17.0/config/sysinfo.rev6993
Continued on next page
```



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Lenovo Group Limited

SPECfp2006 = 108

Lenovo ThinkServer TS150
(3.90 GHz, Intel Xeon E3-1280 v6)

SPECfp_base2006 = 106

CPU2006 license: 9017

Test date: Mar-2017

Test sponsor: Lenovo Group Limited

Hardware Availability: Apr-2017

Tested by: Lenovo Group Limited

Software Availability: Nov-2016

Platform Notes (Continued)

Revision 6993 of 2015-11-06 (b5e8d4b4eb51ed28d7f98696cbe290c1)
running on localhost.localdomain Mon Mar 20 13:29:24 2017

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see: <http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E3-1280 v6 @ 3.90GHz
 1 "physical id"s (chips)
 4 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores : 4
  siblings  : 4
  physical 0: cores 0 1 2 3
  cache size : 8192 KB
```

```
From /proc/meminfo
MemTotal:      65910656 kB
HugePages_Total:      0
Hugepagesize:    2048 kB
```

```
From /etc/*release* /etc/*version*
os-release:
NAME="Red Hat Enterprise Linux Server"
VERSION="7.3 (Maipo)"
ID="rhel"
ID_LIKE="fedora"
VERSION_ID="7.3"
PRETTY_NAME="Red Hat Enterprise Linux Server 7.3 (Maipo)"
ANSI_COLOR="0;31"
CPE_NAME="cpe:/o:redhat:enterprise_linux:7.3:GA:server"
redhat-release: Red Hat Enterprise Linux Server release 7.3 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.3 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.3:ga:server
```

```
uname -a:
Linux localhost.localdomain 3.10.0-514.el7.x86_64 #1 SMP Wed Oct 19 11:24:13
EDT 2016 x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Mar 20 09:37
```

```
SPEC is set to: /home/cpu2006-1.2-ic17.0
Filesystem      Type      Size      Used Avail Use% Mounted on
/dev/sda4        xfs      693G      3.5G  690G   1% /home
```

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Lenovo Group Limited

SPECfp2006 = 108

Lenovo ThinkServer TS150
(3.90 GHz, Intel Xeon E3-1280 v6)

SPECfp_base2006 = 106

CPU2006 license: 9017

Test date: Mar-2017

Test sponsor: Lenovo Group Limited

Hardware Availability: Apr-2017

Tested by: Lenovo Group Limited

Software Availability: Nov-2016

Platform Notes (Continued)

hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS LENOVO S06KT03A 02/07/2017

Memory:

4x Samsung M378A2K43BB1-CRC 16 GB 2 rank 2400 MHz

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:

KMP_AFFINITY = "granularity=fine,compact"

LD_LIBRARY_PATH = "/home/cpu2006-1.2-ic17.0/libs/32:/home/cpu2006-1.2-ic17.0/libs/64:/home/cpu2006-1.2-ic17.0/sh10.2"

OMP_NUM_THREADS = "4"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM
memory using Redhat Enterprise Linux 7.2

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.deallI: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Lenovo Group Limited

SPECfp2006 = 108

Lenovo ThinkServer TS150
(3.90 GHz, Intel Xeon E3-1280 v6)

SPECfp_base2006 = 106

CPU2006 license: 9017

Test date: Mar-2017

Test sponsor: Lenovo Group Limited

Hardware Availability: Apr-2017

Tested by: Lenovo Group Limited

Software Availability: Nov-2016

Base Portability Flags (Continued)

459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -qopt-prefetch

C++ benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch

Fortran benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -qopt-prefetch

Benchmarks using both Fortran and C:
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -qopt-prefetch

Peak Compiler Invocation

C benchmarks:
icc -m64

C++ benchmarks:
icpc -m64

Fortran benchmarks:
ifort -m64

Benchmarks using both Fortran and C:
icc -m64 ifort -m64

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Lenovo Group Limited

SPECfp2006 = 108

Lenovo ThinkServer TS150
(3.90 GHz, Intel Xeon E3-1280 v6)

SPECfp_base2006 = 106

CPU2006 license: 9017

Test date: Mar-2017

Test sponsor: Lenovo Group Limited

Hardware Availability: Apr-2017

Tested by: Lenovo Group Limited

Software Availability: Nov-2016

Peak Optimization Flags (Continued)

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -fno-alias -auto-ilp32

447.dealIII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -unroll2 -inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -unroll2 -inline-level=0
-qopt-prefetch -parallel

465.tonto: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -inline-calloc -qopt-malloc-options=3
-auto -unroll4

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Lenovo Group Limited

SPECfp2006 = 108

Lenovo ThinkServer TS150
(3.90 GHz, Intel Xeon E3-1280 v6)

SPECfp_base2006 = 106

CPU2006 license: 9017

Test date: Mar-2017

Test sponsor: Lenovo Group Limited

Hardware Availability: Apr-2017

Tested by: Lenovo Group Limited

Software Availability: Nov-2016

Peak Optimization Flags (Continued)

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Lenovo-Platform-Settings-V1.2-BDW-revE.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Lenovo-Platform-Settings-V1.2-BDW-revE.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Tue Apr 4 16:57:13 2017 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 4 April 2017.