



SPEC® OMPG2012 Result

Copyright 2012-2017 Standard Performance Evaluation Corporation

Cray

(Test Sponsor: Indiana University)

SPECompG_peak2012 = Not Run

Cray XC30 (Intel Xeon E5-2697 v2)

SPECompG_base2012 = 5.50

OMP2012 license:3440A


Test date: Jul-2017

Test sponsor: Indiana University

Hardware Availability: Apr-2013

Tested by: Indiana University

Software Availability: Mar-2017

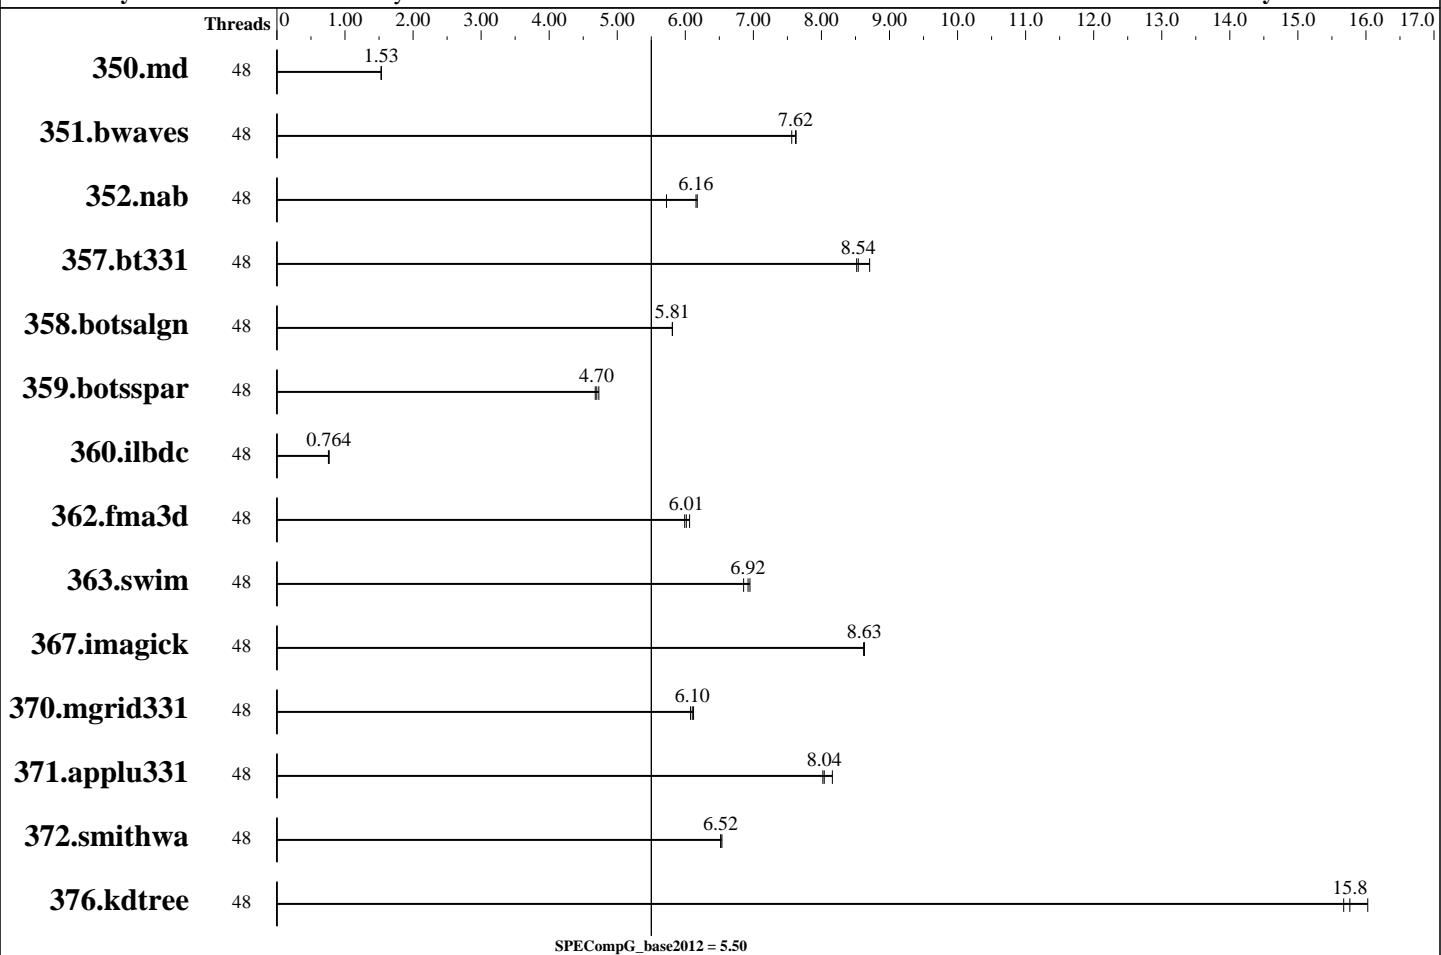

Hardware

CPU Name: Intel Xeon E5-2697 v2
CPU Characteristics: Intel Turbo Boost Technology off, Hyper-Threading on
CPU MHz: 2700
CPU MHz Maximum: 2700
FPU: Integrated
CPU(s) enabled: 24 cores, 2 chips, 12 cores/chip, 2 threads/core
CPU(s) orderable: 1-2 chips
Primary Cache: 32 KB I + 32 KB D on chip per core
Secondary Cache: 256 KB I+D on chip per core
L3 Cache: 30 MB I+D on chip per chip
Other Cache: None
Memory: 64 GB (8 x 8 GB 2Rx4 PC3-14900R-13, ECC)
Disk Subsystem: None
Other Hardware: None
Base Threads Run: 48

Software

Operating System: SUSE Linux Enterprise Server 11 SP3 (x86_64), Cray Linux Environment 5.2 3.0.101-0.46.1_1.0502.8871-cray_ari_c
Compiler: C/C++/Fortran: Version 6.2.0 of gcc, Build 20160822
Auto Parallel: No
File System: Lustre 2.5 (DDN SFA12K) over QDR InfiniBand
System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: Not Applicable
Other Software: None

Continued on next page



SPEC OMPG2012 Result

Copyright 2012-2017 Standard Performance Evaluation Corporation

Cray

(Test Sponsor: Indiana University)

Cray XC30 (Intel Xeon E5-2697 v2)

SPECompG_peak2012 = Not Run

OMP2012 license:3440A

Test date: Jul-2017

Hardware Availability: Apr-2013

Software Availability: Mar-2017

Test sponsor: Indiana University

Tested by: Indiana University

Minimum Peak Threads: --
Maximum Peak Threads: --

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
350.md	48	<u>3021</u>	<u>1.53</u>	3021	1.53	3019	1.53							
351.bwaves	48	599	7.56	<u>595</u>	<u>7.62</u>	594	7.63							
352.nab	48	630	6.18	<u>632</u>	<u>6.16</u>	680	5.72							
357.bt331	48	556	8.52	544	8.71	<u>555</u>	<u>8.54</u>							
358.botsalgn	48	749	5.81	<u>749</u>	<u>5.81</u>	749	5.81							
359.botsspar	48	1110	4.73	<u>1117</u>	<u>4.70</u>	1123	4.68							
360.ilbdc	48	<u>4661</u>	<u>0.764</u>	4707	0.756	4650	0.766							
362.fma3d	48	627	6.06	634	5.99	<u>632</u>	<u>6.01</u>							
363.swim	48	652	6.95	<u>654</u>	<u>6.92</u>	661	6.86							
367.imagick	48	816	8.62	<u>815</u>	<u>8.63</u>	815	8.63							
370.mgrid331	48	727	6.08	722	6.12	<u>724</u>	<u>6.10</u>							
371.applu331	48	743	8.16	756	8.02	<u>754</u>	<u>8.04</u>							
372.smithwa	48	822	6.52	820	6.54	<u>822</u>	<u>6.52</u>							
376.kdtree	48	287	15.7	281	16.0	<u>285</u>	<u>15.8</u>							

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Platform Notes

```
Sysinfo program
/N/dc2/projects/hpc/lijunj/spec/omp2012-1.1-run/bigred2plus2/Docs/sysinfo
Revision 563 of 2016-06-10 (097295389cf6073d8c3b03fa376740a5)
running on nid00540 Sat Jul 15 09:46:29 2017
```

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
<http://www.spec.org/omp2012/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-2697 v2 @ 2.70GHz
        2 "physical id"s (chips)
        48 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
        cpu cores : 12
        siblings : 24
        physical 0: cores 0 1 2 3 4 5 8 9 10 11 12 13
        physical 1: cores 0 1 2 3 4 5 8 9 10 11 12 13
cache size : 30720 KB
```

Continued on next page



SPEC OMPG2012 Result

Copyright 2012-2017 Standard Performance Evaluation Corporation

Cray

(Test Sponsor: Indiana University)

Cray XC30 (Intel Xeon E5-2697 v2)

SPECompG_peak2012 = Not Run

OMP2012 license:3440A

Test date: Jul-2017

Hardware Availability: Apr-2013

Software Availability: Mar-2017

Test sponsor: Indiana University

Tested by: Indiana University

SPECompG_base2012 = 5.50

Platform Notes (Continued)

```
From /proc/meminfo
  MemTotal:       66072376 kB
  HugePages_Total:      0
  Hugepagesize:     2048 kB
```

```
/usr/bin/lsb_release -d
  SUSE Linux Enterprise Server 11 (x86_64)
```

```
From /etc/*release* /etc/*version*
  SuSE-release:
    SUSE Linux Enterprise Server 11 (x86_64)
    VERSION = 11
    PATCHLEVEL = 3
```

```
uname -a:
  Linux nid00540 3.0.101-0.46.1_1.0502.8871-crav_ari_c #1 SMP Mon Jun 26
  15:18:40 UTC 2017 x86_64 x86_64 x86_64 GNU/Linux
```

```
SPEC is set to: /N/dc2/projects/hpc/lijunj/spec/omp2012-1.1-run/bigred2plus2
  Filesystem          Type  Size  Used Avail Use% Mounted
  on
  10.10.0.171@o2ib:10.10.0.172@o2ib:/dc2 lustre  5.3P  5.1P  154T  98% /N/dc2
```

```
Cannot run dmidecode; consider saying 'chmod +s /usr/sbin/dmidecode'
```

```
(End of data from sysinfo program)
```

General Notes

Environment Variables:
OMP_STACKSIZE=1G
ulimit -s unlimited

Base Compiler Invocation

C benchmarks:
gcc

C++ benchmarks:
g++

Fortran benchmarks:
gfortran



SPEC OMPG2012 Result

Copyright 2012-2017 Standard Performance Evaluation Corporation

Cray

(Test Sponsor: Indiana University)

Cray XC30 (Intel Xeon E5-2697 v2)

SPECompG_peak2012 = Not Run

OMP2012 license:3440A

Test sponsor: Indiana University

Tested by: Indiana University

Test date: Jul-2017

Hardware Availability: Apr-2013

Software Availability: Mar-2017

Base Portability Flags

350.md: -ffree-form -fno-range-check
357.bt331: -mcmodel=medium
363.swim: -mcmodel=medium
367.imagick: -std=c99

Base Optimization Flags

C benchmarks:

-Ofast -march=native -fopenmp

C++ benchmarks:

-Ofast -march=native -fopenmp

Fortran benchmarks:

-Ofast -march=native -fopenmp

The flags file that was used to format this result can be browsed at

<http://www.spec.org/omp2012/flags/gcc-linux64.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/omp2012/flags/gcc-linux64.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.

For other inquiries, please contact webmaster@spec.org.

Tested with SPEC OMP2012 v1.1.

Report generated on Wed Aug 16 15:43:31 2017 by SPEC OMP2012 PS/PDF formatter v541.

Originally published on 16 August 2017.