



SPEC[®] CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp[®]_rate2006 = 115

PowerEdge 2970 (AMD Opteron 2382, 2.60 GHz)

SPECfp_rate_base2006 = 103

CPU2006 license: 55


Test date: Dec-2008

Test sponsor: Dell Inc.

Hardware Availability: Nov-2008

Tested by: Dell Inc.

Software Availability: Oct-2008

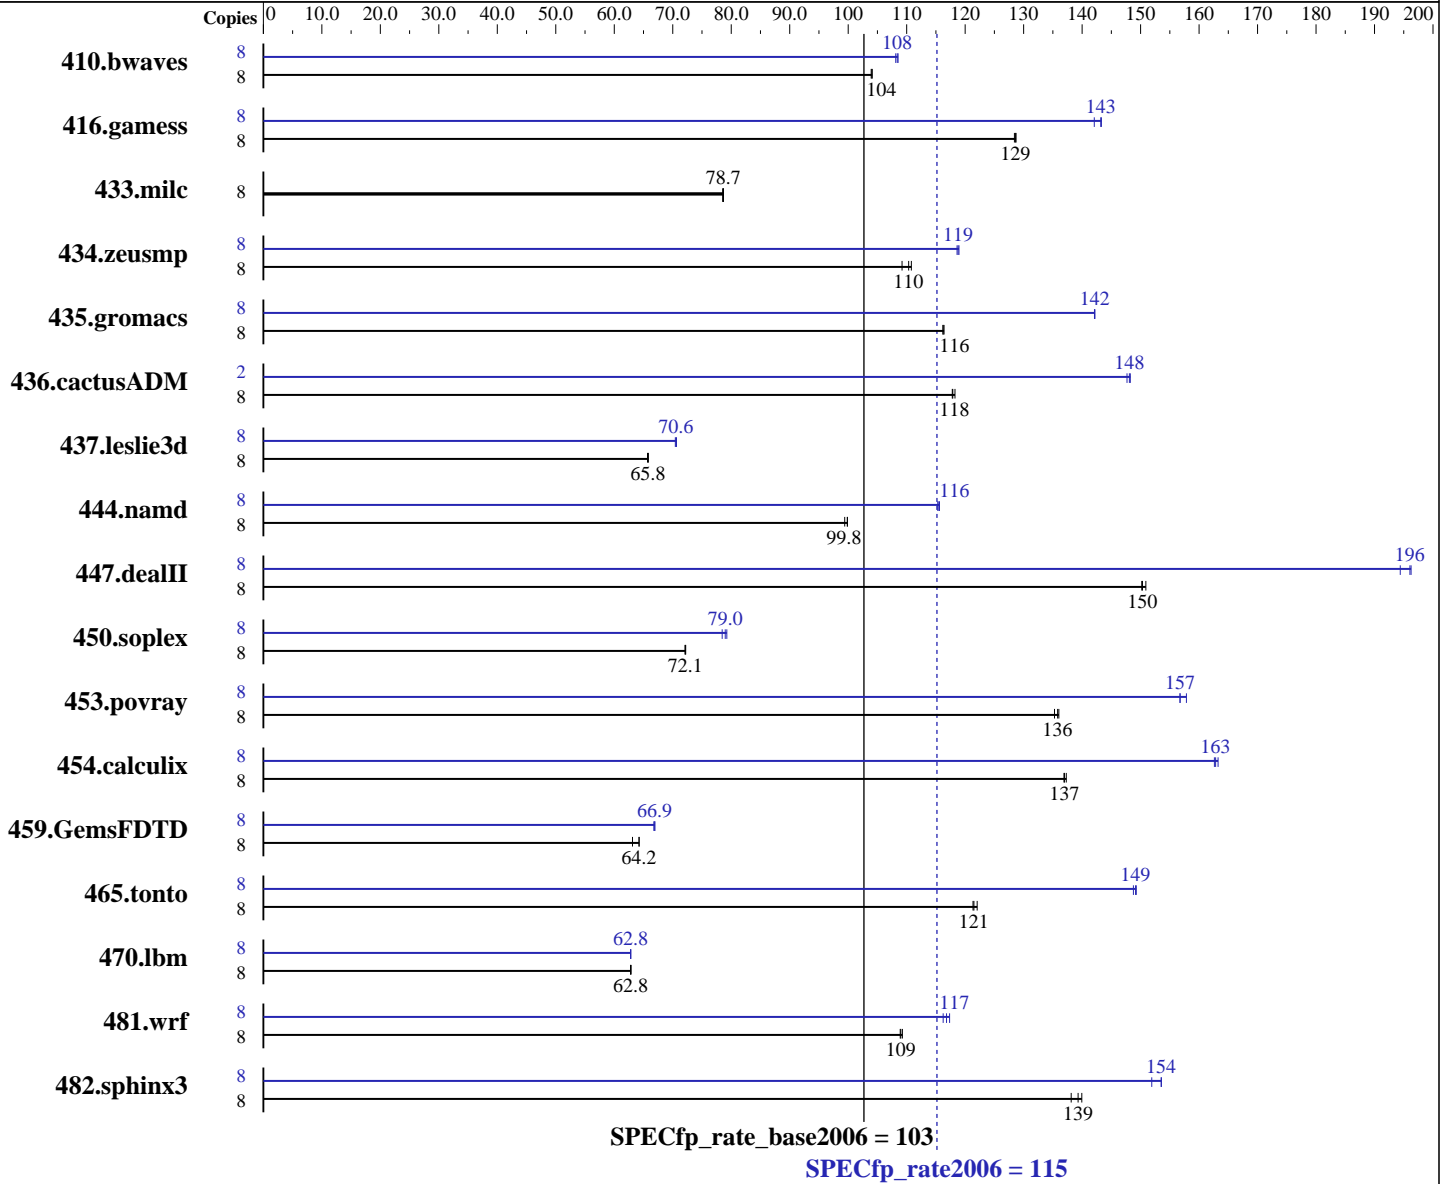

Hardware

CPU Name: AMD Opteron 2382
 CPU Characteristics: 2600
 CPU MHz: Integrated
 FPU: 8 cores, 2 chips, 4 cores/chip
 CPU(s) enabled: 1,2 chips
 CPU(s) orderable: 64 KB I + 64 KB D on chip per core
 Primary Cache: 512 KB I+D on chip per core
 Secondary Cache:

Continued on next page

Software

Operating System: SUSE Linux Enterprise Server 10 (x86_64) SP2, Kernel 2.6.16.60-0.21-smp
 Compiler: PGI Server Complete Version 7.2 PathScale Compiler Suite Version 3.2
 Auto Parallel: Yes
 File System: ReiserFS
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = 115

PowerEdge 2970 (AMD Opteron 2382, 2.60 GHz)

SPECfp_rate_base2006 = 103

CPU2006 license: 55

Test date: Dec-2008

Test sponsor: Dell Inc.

Hardware Availability: Nov-2008

Tested by: Dell Inc.

Software Availability: Oct-2008

L3 Cache: 6 MB I+D on chip per chip
Other Cache: None
Memory: 32 GB (8 x 4 GB DDR2-800)
Disk Subsystem: 1 x 73 GB 15000 RPM SAS
Other Hardware: None

Other Software: binutils 2.18
32-bit and 64-bit libhugetlbfs libraries

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	8	1045	104	1046	104	1044	104	8	1002	109	1003	108	1005	108
416.gamess	8	1217	129	1218	129	1220	128	8	1093	143	1102	142	1094	143
433.milc	8	934	78.7	935	78.5	934	78.7	8	934	78.7	935	78.5	934	78.7
434.zeusmp	8	657	111	660	110	667	109	8	613	119	614	119	612	119
435.gromacs	8	492	116	491	116	491	116	8	402	142	402	142	402	142
436.cactusADM	8	808	118	811	118	812	118	2	161	148	162	148	161	148
437.leslie3d	8	1145	65.7	1143	65.8	1143	65.8	8	1066	70.6	1065	70.6	1068	70.4
444.namd	8	643	99.8	642	99.9	645	99.4	8	556	115	555	116	555	116
447.dealII	8	606	151	609	150	609	150	8	466	196	467	196	471	194
450.soplex	8	924	72.2	925	72.1	925	72.1	8	845	79.0	850	78.5	842	79.2
453.povray	8	313	136	315	135	313	136	8	272	157	272	157	270	158
454.calculix	8	482	137	482	137	481	137	8	406	163	404	163	405	163
459.GemsFDTD	8	1345	63.1	1321	64.2	1321	64.3	8	1269	66.9	1271	66.8	1268	66.9
465.tonto	8	648	121	645	122	649	121	8	527	149	529	149	528	149
470.lbm	8	1748	62.9	1751	62.8	1750	62.8	8	1750	62.8	1751	62.8	1750	62.8
481.wrf	8	820	109	821	109	818	109	8	769	116	762	117	765	117
482.sphinx3	8	1119	139	1114	140	1129	138	8	1016	154	1026	152	1015	154

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores

Operating System Notes

The libhugetlbfs libraries were installed using the installation rpms that came with the distribution.

'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152' was used to set environment locked pages in memory limit

Set vm/nr_hugepages=7168 in /etc/sysctl.conf
mount -t hugetlbfs nodev /mnt/hugepages



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = 115

PowerEdge 2970 (AMD Opteron 2382, 2.60 GHz)

SPECfp_rate_base2006 = 103

CPU2006 license: 55

Test date: Dec-2008

Test sponsor: Dell Inc.

Hardware Availability: Nov-2008

Tested by: Dell Inc.

Software Availability: Oct-2008

General Notes

Environment variables set by runspec before the start of the run:

HUGETLB_MORECORE = "yes"

LD_LIBRARY_PATH = "/root/cpu2006_1.1/amd909gh-libs/64:/root/cpu2006_1.1/amd909gh-libs/32"

NCPUS = "4"

Base Compiler Invocation

C benchmarks:

pgcc

C++ benchmarks:

pgcpp

Fortran benchmarks:

pgf95

Benchmarks using both Fortran and C:

pgcc pgf95

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
 416.gamess: -DSPEC_CPU_LP64
 433.milc: -DSPEC_CPU_LP64
 434.zeusmp: -DSPEC_CPU_LP64
 435.gromacs: -DSPEC_CPU_LP64 -Mnomain
 436.cactusADM: -DSPEC_CPU_LP64 -Mnomain
 437.leslie3d: -DSPEC_CPU_LP64
 444.namd: -DSPEC_CPU_LP64
 447.deall: -DSPEC_CPU_LP64
 450.soplex: -DSPEC_CPU_LP64
 453.povray: -DSPEC_CPU_LP64
 454.calculix: -DSPEC_CPU_LP64 -Mnomain
 459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
 482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:

-Mvect=cachesize:6291456 -fastsse -Msmartalloc=huge -Mfprelaxed
-Mipa=fast -Mipa=inline -tp barcelona-64 -Bstatic_pgi

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = 115

PowerEdge 2970 (AMD Opteron 2382, 2.60 GHz)

SPECfp_rate_base2006 = 103

CPU2006 license: 55

Test date: Dec-2008

Test sponsor: Dell Inc.

Hardware Availability: Nov-2008

Tested by: Dell Inc.

Software Availability: Oct-2008

Base Optimization Flags (Continued)

C++ benchmarks:

-Mvect=cachesize:6291456 -fastsse -Msmartalloc=huge -Mfprelaxed
--zc_eh -Mipa=fast -Mipa=inline -tp barcelona-64 -Bstatic_pgi

Fortran benchmarks:

-Mvect=cachesize:6291456 -fastsse -Mfprelaxed -Msmartalloc=huge
-Mipa=fast -Mipa=inline -tp barcelona-64 -Bstatic_pgi

Benchmarks using both Fortran and C:

-Mvect=cachesize:6291456 -fastsse -Msmartalloc=huge -Mfprelaxed
-Mipa=fast -Mipa=inline -tp barcelona-64 -Bstatic_pgi

Base Other Flags

C benchmarks:

-Mipa=jobs:4

C++ benchmarks:

-Mipa=jobs:4

Fortran benchmarks:

-Mipa=jobs:4

Benchmarks using both Fortran and C:

-Mipa=jobs:4

Peak Compiler Invocation

C benchmarks:

pgcc

C++ benchmarks (except as noted below):

pathCC

444.namd: pgcpp

Fortran benchmarks (except as noted below):

pathf95

410.bwaves: pgf95

434.zeusmp: pgf95

437.leslie3d: pgf95

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = 115

PowerEdge 2970 (AMD Opteron 2382, 2.60 GHz)

SPECfp_rate_base2006 = 103

CPU2006 license: 55

Test date: Dec-2008

Test sponsor: Dell Inc.

Hardware Availability: Nov-2008

Tested by: Dell Inc.

Software Availability: Oct-2008

Peak Compiler Invocation (Continued)

Benchmarks using both Fortran and C (except as noted below):

pgcc pgf95

435.gromacs: pathcc pathf95

481.wrf: pathcc pathf95

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
 416.gamess: -DSPEC_CPU_LP64
 433.milc: -DSPEC_CPU_LP64
 434.zeusmp: -DSPEC_CPU_LP64
 435.gromacs: -DSPEC_CPU_LP64
 436.cactusADM: -DSPEC_CPU_LP64 -Mnomain
 437.leslie3d: -DSPEC_CPU_LP64
 444.namd: -DSPEC_CPU_LP64
 453.povray: -DSPEC_CPU_LP64
 454.calculix: -DSPEC_CPU_LP64 -Mnomain
 459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX -fno-second-underscore
 482.sphinx3: -DSPEC_CPU_LP64

Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: -Mvect=cachesize:6291456 -fastsse -Msmartalloc=huge
-Mprefetch=t0 -Mloop32 -Mfprelaxed -Mipa=fast -Mipa=inline
-tp barcelona-64 -Bstatic_pgi

482.sphinx3: -Mpfi=indirect(pass 1) -Mpfo=indirect(pass 2)
-Mipa=fast(pass 2) -Mipa=inline(pass 2)
-Mvect=cachesize:6291456 -fastsse -Mfprelaxed -Msmartalloc
-tp barcelona-64 -Bstatic_pgi

C++ benchmarks:

444.namd: -Mpfi(pass 1) -Mpfo(pass 2) -Mipa=fast(pass 2)
-Mipa=inline(pass 2) -Mvect=cachesize:6291456 -fastsse
-Munroll=n:4 -Munroll=m:8 -Msmartalloc=huge -Mnodepch
-Mfprelaxed --zc_eh -tp barcelona-64 -Bstatic_pgi

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = 115

PowerEdge 2970 (AMD Opteron 2382, 2.60 GHz)

SPECfp_rate_base2006 = 103

CPU2006 license: 55

Test date: Dec-2008

Test sponsor: Dell Inc.

Hardware Availability: Nov-2008

Tested by: Dell Inc.

Software Availability: Oct-2008

Peak Optimization Flags (Continued)

447.dealll: -march=barcelona -Ofast -static -INLINE:aggressive=on
-fno-exceptions -m32

450.soplex: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -L/usr/lib -lhugetlbfs(pass 2) -O3
-INLINE:aggressive=on -OPT:IEEE_arith=3
-OPT:IEEE_NaN_Inf=off -OPT:fold_unsigned_relops=on
-OPT:malloc_alg=1 -CG:load_exe=0 -fno-exceptions -m32

453.povray: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -INLINE:aggressive=on

Fortran benchmarks:

410.bwaves: -Mvect=cachesize:6291456 -fastsse -Msmartalloc
-Mprefetch=nta -Mfpelaxed -Mipa=fast -Mipa=inline
-tp barcelona-64 -Bstatic_pgi

416.gamess: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2)
-Wl,-T/usr/share/libhugetlbfs/ldscripts/elf_x86_64.xBDT(pass 2)
-L/usr/lib64 -lhugetlbfs(pass 2) -O2 -OPT:Ofast -OPT:ro=3
-OPT:unroll_size=256

434.zeusmp: -Mvect=cachesize:6291456 -fastsse -Mfpelaxed
-Mprefetch=distance:8 -Mprefetch=t0 -Msmartalloc=huge
-Msmartalloc=hugebss -Mipa=fast -Mipa=inline
-tp barcelona-64 -Bstatic_pgi

437.leslie3d: -Mphi=indirect(pass 1) -Mpfo=indirect(pass 2)
-Mipa=fast(pass 2) -Mipa=inline(pass 2)
-Mvect=cachesize:6291456 -fastsse -Mvect=fuse
-Msmartalloc=huge -Mprefetch=distance:8 -Mprefetch=t0
-Mfpelaxed -tp barcelona-64 -Bstatic_pgi

459.GemsFDTD: -march=barcelona -Ofast -LNO:fission=2 -LNO:simd=2
-LNO:prefetch_ahead=1 -CG:load_exe=0 -CG:prefer_lru_reg=off
-OPT:malloc_alg=1
-Wl,-T/usr/share/libhugetlbfs/ldscripts/elf_x86_64.xBDT
-L/usr/lib64 -lhugetlbfs

465.tonto: -march=barcelona -Ofast -OPT:alias=no_f90_pointer_alias
-LNO:blocking=off -CG:load_exe=1 -IPA:plimit=525
-OPT:malloc_alg=1
-Wl,-T/usr/share/libhugetlbfs/ldscripts/elf_x86_64.xBDT
-L/usr/lib64 -lhugetlbfs

Benchmarks using both Fortran and C:

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = 115

PowerEdge 2970 (AMD Opteron 2382, 2.60 GHz)

SPECfp_rate_base2006 = 103

CPU2006 license: 55

Test date: Dec-2008

Test sponsor: Dell Inc.

Hardware Availability: Nov-2008

Tested by: Dell Inc.

Software Availability: Oct-2008

Peak Optimization Flags (Continued)

435.gromacs: -march=barcelona -Ofast -OPT:rsqrt=2 -OPT:malloc_alg=1
-Wl,-T/usr/share/libhugetlbfs/ldscripts/elf_x86_64.xBDT
-L/usr/lib64 -lhugetlbfs

436.cactusADM: -Mvect=cachesize:6291456 -fastsse -Mconcur
-Msmartalloc=huge -Mfprelaxed -Mipa=fast -Mipa=inline
-tp barcelona-64 -Bstatic_pgi

454.calculix: -Mpfi=indirect(pass 1) -Mpfo=indirect(pass 2)
-Mipa=fast(pass 2) -Mipa=inline(pass 2)
-Mvect=cachesize:6291456 -fastsse -Msmartalloc=huge
-Mprefetch=t0 -Mpre -Mfprelaxed -tp barcelona-64
-Bstatic_pgi

481.wrf: -march=barcelona -Ofast -LNO:blocking=off
-LNO:prefetch_ahead=10 -LANG:copyinout=off
-IPA:callee_limit=5000 -GRA:prioritize_by_density=on
-OPT:malloc_alg=1 -m3dnow
-Wl,-T/usr/share/libhugetlbfs/ldscripts/elf_x86_64.xBDT
-L/usr/lib64 -lhugetlbfs

Peak Other Flags

C benchmarks:

-Mipa=jobs:4(pass 2)

C++ benchmarks:

444.namd: -Mipa=jobs:4(pass 2)

Fortran benchmarks (except as noted below):

-Mipa=jobs:4(pass 2)

416.gamess: No flags used

459.GemsFDTD: No flags used

465.tonto: No flags used

Benchmarks using both Fortran and C (except as noted below):

-Mipa=jobs:4(pass 2)

435.gromacs: No flags used

481.wrf: No flags used



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = 115

PowerEdge 2970 (AMD Opteron 2382, 2.60 GHz)

SPECfp_rate_base2006 = 103

CPU2006 license: 55

Test date: Dec-2008

Test sponsor: Dell Inc.

Hardware Availability: Nov-2008

Tested by: Dell Inc.

Software Availability: Oct-2008

The flags files that were used to format this result can be browsed at

http://www.spec.org/cpu2006/flags/pgi72_linux_flags.20090713.html
http://www.spec.org/cpu2006/flags/CPU2006_flags.20090710.html
<http://www.spec.org/cpu2006/flags/amd-platform-amd909gh.html>

You can also download the XML flags sources by saving the following links:

http://www.spec.org/cpu2006/flags/pgi72_linux_flags.20090713.xml
http://www.spec.org/cpu2006/flags/CPU2006_flags.20090710.xml
<http://www.spec.org/cpu2006/flags/amd-platform-amd909gh.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Tue Jul 22 22:52:48 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 6 January 2009.