



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint®\_rate2006 = 203

PowerEdge R805 (AMD Opteron 2435, 2.60 GHz)

SPECint\_rate\_base2006 = 160

CPU2006 license: 55


Test date: May-2009

Test sponsor: Dell Inc.

Hardware Availability: Jul-2009

Tested by: Dell Inc.

Software Availability: Apr-2009

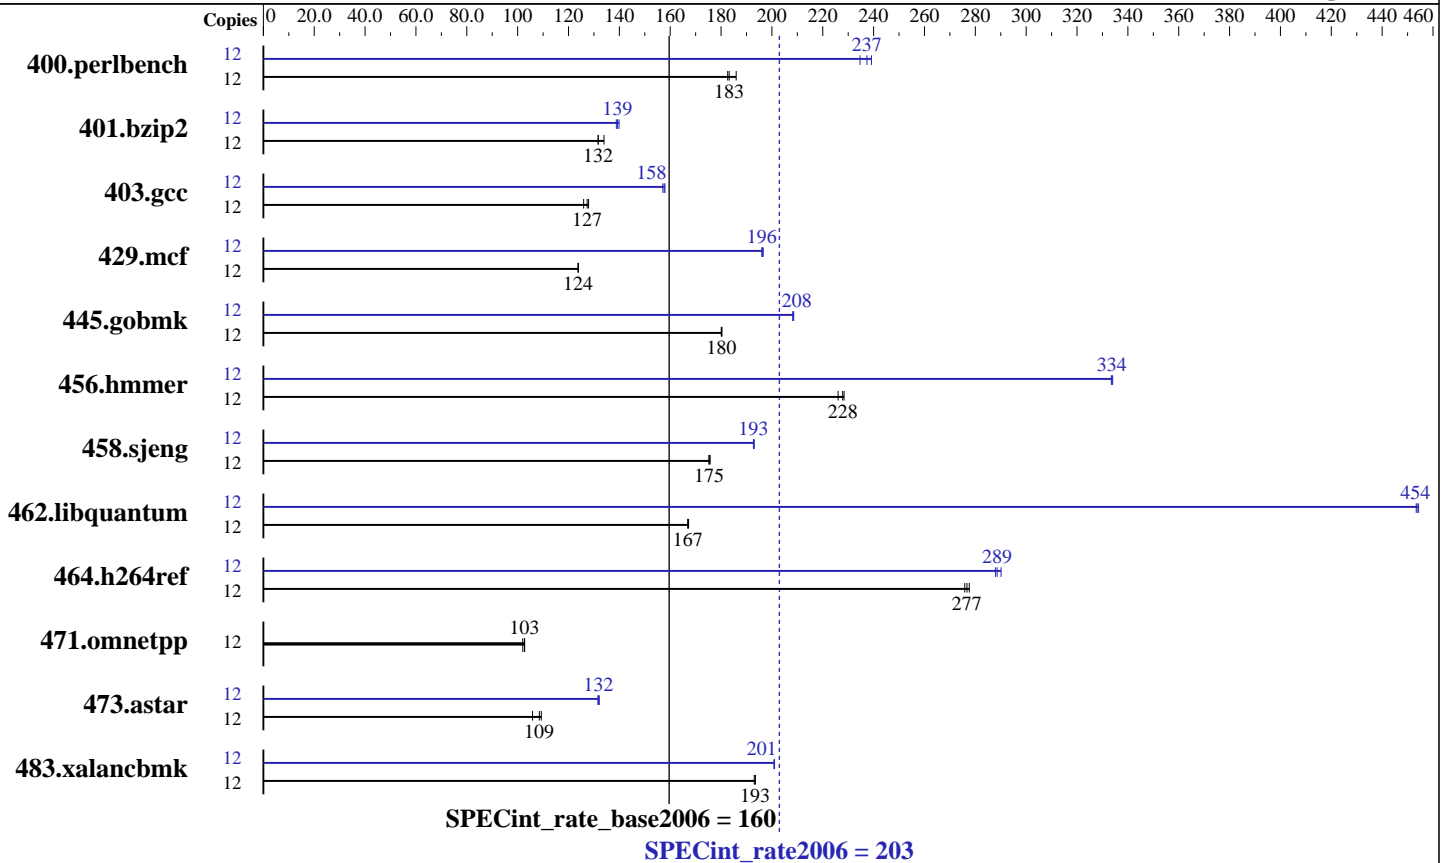

## Hardware

CPU Name: AMD Opteron 2435  
 CPU Characteristics:  
 CPU MHz: 2600  
 FPU: Integrated  
 CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 64 KB I + 64 KB D on chip per core  
 Secondary Cache: 512 KB I+D on chip per core  
 L3 Cache: 6 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 32 GB (8 x 4 GB DDR2-800)  
 Disk Subsystem: 1 x 73 GB 15000 RPM SAS  
 Other Hardware: None

## Software

Operating System: Red Hat Enterprise Linux Server release 5.3, Kernel 2.6.18-128.el5  
 Compiler: PGI Server Complete Version 8.0  
 x86 Open64 4.2.2 Compiler Suite (from AMD)  
 Auto Parallel: No  
 File System: ext3  
 System State: Run level 3 (Full multiuser with network)  
 Base Pointers: 32/64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: binutils 2.18  
 SmartHeap 8.1 32-bit Library for Linux



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint\_rate2006 = 203

PowerEdge R805 (AMD Opteron 2435, 2.60 GHz)

SPECint\_rate\_base2006 = 160

CPU2006 license: 55

Test date: May-2009

Test sponsor: Dell Inc.

Hardware Availability: Jul-2009

Tested by: Dell Inc.

Software Availability: Apr-2009

## Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio		
400.perlbench	12	631	186	642	183	<b>640</b>	<b>183</b>	12	500	235	<b>494</b>	<b>237</b>	490	239		
401.bzip2	12	864	134	<b>879</b>	<b>132</b>	880	132	12	834	139	828	140	<b>831</b>	<b>139</b>		
403.gcc	12	767	126	<b>759</b>	<b>127</b>	755	128	12	615	157	<b>613</b>	<b>158</b>	612	158		
429.mcf	12	<b>884</b>	<b>124</b>	883	124	884	124	12	558	196	557	197	<b>558</b>	<b>196</b>		
445.gobmk	12	<b>699</b>	<b>180</b>	698	180	699	180	12	604	209	605	208	<b>604</b>	<b>208</b>		
456.hammer	12	495	226	490	228	<b>491</b>	<b>228</b>	12	336	333	335	334	<b>336</b>	<b>334</b>		
458.sjeng	12	826	176	<b>828</b>	<b>175</b>	829	175	12	752	193	753	193	<b>753</b>	<b>193</b>		
462.libquantum	12	<b>1489</b>	<b>167</b>	1490	167	1487	167	12	<b>548</b>	<b>454</b>	548	453	547	454		
464.h264ref	12	963	276	<b>960</b>	<b>277</b>	957	278	12	922	288	915	290	<b>920</b>	<b>289</b>		
471.omnetpp	12	<b>730</b>	<b>103</b>	730	103	735	102	12	<b>730</b>	<b>103</b>	730	103	735	102		
473.astar	12	796	106	771	109	<b>776</b>	<b>109</b>	12	640	132	<b>639</b>	<b>132</b>	638	132		
483.xalancbmk	12	429	193	<b>428</b>	<b>193</b>	428	193	12	412	201	412	201	<b>412</b>	<b>201</b>		

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

Set vm/nr\_hugepages=5400 in /etc/sysctl.conf  
mount -t hugetlbfs nodev /mnt/hugepages

## General Notes

Environment variables set by runspec before the start of the run:  
HUGETLB\_LIMIT = "450"  
LD\_LIBRARY\_PATH = "/root/cpu2006-1.1/amd0905is-libs/64:/root/cpu2006-1.1/amd0905is-libs/32"  
PGI\_HUGE\_PAGES = "450"

The x86 Open64 Compiler Suite is only available from (and supported by) AMD at  
<http://developer.amd.com/cpu/open64>



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint\_rate2006 = 203

PowerEdge R805 (AMD Opteron 2435, 2.60 GHz)

SPECint\_rate\_base2006 = 160

CPU2006 license: 55

Test date: May-2009

Test sponsor: Dell Inc.

Hardware Availability: Jul-2009

Tested by: Dell Inc.

Software Availability: Apr-2009

## Base Compiler Invocation

C benchmarks:  
opencc

C++ benchmarks:  
openCC

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64  
401.bzip2: -DSPEC\_CPU\_LP64  
403.gcc: -DSPEC\_CPU\_LP64  
429.mcf: -DSPEC\_CPU\_LP64  
445.gobmk: -DSPEC\_CPU\_LP64  
456.hmmcr: -DSPEC\_CPU\_LP64  
458.sjeng: -DSPEC\_CPU\_LP64  
462.libquantum: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX  
464.h264ref: -DSPEC\_CPU\_LP64  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:  
-march=barcelona -Ofast -CG:local\_sched\_alg=1 -HP:bdt=2m:heap=2m

C++ benchmarks:  
-march=barcelona -Ofast -m32 -INLINE:aggressive=on  
-L/root/work/libraries/SmartHeap-8.1/lib -lsmartheap

## Peak Compiler Invocation

C benchmarks (except as noted below):  
opencc

456.hmmcr: pgcc

C++ benchmarks (except as noted below):  
openCC

473.astar: pgcpp



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint\_rate2006 = 203

PowerEdge R805 (AMD Opteron 2435, 2.60 GHz)

SPECint\_rate\_base2006 = 160

CPU2006 license: 55

Test date: May-2009

Test sponsor: Dell Inc.

Hardware Availability: Jul-2009

Tested by: Dell Inc.

Software Availability: Apr-2009

## Peak Portability Flags

```

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

```

## Peak Optimization Flags

C benchmarks:

```

400.perlbench: -march=barcelona -fb_create fbdata(pass 1)
               -fb_opt fbdata(pass 2) -Ofast -IPA:plimit=20000 -LNO:opt=0
               -OPT:unroll_times_max=8 -OPT:unroll_size=256
               -OPT:unroll_level=2 -OPT:keep_ext=on -WOPT:if_conv=0
               -CG:local_sched_alg=1 -CG:unroll_fb_req=on
               -HP:bdt=2m:heap=2m

401.bzip2: -march=barcelona -fb_create fbdata(pass 1)
            -fb_opt fbdata(pass 2) -O3 -OPT:alias=disjoint
            -OPT:unroll_size=0 -OPT:Ofast -OPT:goto=off
            -INLINE:aggressive=on -CG:local_sched_alg=1 -m3dnw
            -HP:bdt=2m:heap=2m

403.gcc: -march=barcelona -fb_create fbdata(pass 1)
          -fb_opt fbdata(pass 2) -Ofast -LNO:trip_count=256
          -LNO:prefetch_ahead=10 -CG:cmp_peep=on -m32
          -HP:bdt=2m:heap=2m -GRA:unspill=on

429.mcf: -march=barcelona -O3 -ipa -INLINE:aggressive=on
          -CG:gcm=off -GRA:prioritize_by_density=on -m32
          -HP:bdt=2m:heap=2m

445.gobmk: -march=barcelona -fb_create fbdata(pass 1)
            -fb_opt fbdata(pass 2) -O3 -OPT:alias=restrict
            -OPT:unroll_times_max=8 -OPT:unroll_size=256
            -OPT:unroll_level=2 -OPT:keep_ext=on -ipa -IPA:plimit=750
            -IPA:min_hotness=300 -IPA:pu_reorder=1 -LNO:prefetch=1
            -LNO:ignore_feedback=off -CG:p2align=on
            -CG:unroll_fb_req=on -HP:bdt=2m:heap=2m

456.hmmer: -fastsse -Mvect=partial -Munroll=n:8 -Msmartalloc=huge
            -Msafeptr -Mprefetch=t0 -Mfprelaxed -Mipa=const -Mipa=ptr
            -Mipa=arg -Mipa=inline -tp shanghai-64 -Bstatic_pgi

```

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint\_rate2006 = 203

PowerEdge R805 (AMD Opteron 2435, 2.60 GHz)

SPECint\_rate\_base2006 = 160

CPU2006 license: 55

Test date: May-2009

Test sponsor: Dell Inc.

Hardware Availability: Jul-2009

Tested by: Dell Inc.

Software Availability: Apr-2009

## Peak Optimization Flags (Continued)

```
458.sjeng: -march=barcelona -fb_create fbdata(pass 1)
          -fb_opt fbdata(pass 2) -O3 -ipa -LNO:ignore_feedback=off
          -LNO:full_unroll=10 -LNO:fusion=0 -LNO:fission=2
          -IPA:pu_reorder=2 -CG:ptr_load_use=0
          -OPT:unroll_times_max=8 -INLINE:aggressive=on
          -HP:bdt=2m:heap=2m
```

```
462.libquantum: -march=barcelona -Ofast -LNO:pf2=0 -CG:gcm=off
                -CG:use_prefetchnta=on -CG:cmp_peep=on -WOPT:aggstr=0
                -HP:bdt=2m:heap=2m -OPT:alias=disjoint
                -INLINE:aggressive=on -IPA:space=1000 -IPA:plimit=20000
```

```
464.h264ref: -march=barcelona -fb_create fbdata(pass 1)
             -fb_opt fbdata(pass 2) -O3 -IPA:plimit=20000
             -OPT:alias=disjoint -LNO:prefetch=0 -CG:ptr_load_use=0
             -CG:push_pop_int_saved_regs=off -HP:bdt=2m:heap=2m
```

C++ benchmarks:

```
471.omnetpp: basepeak = yes
```

```
473.astar: -Mpfi(pass 1) -Mpfo(pass 2) -Mipa=fast(pass 2)
           -Mipa=inline:6(pass 2) -fastsse -O4 -Msmartalloc=huge
           -Msafeptr=global -Mfprelaxed --zc_eh -tp shanghai-32
           -Bstatic_pgi
```

```
483.xalancbmk: -march=barcelona -Ofast -INLINE:aggressive=on -m32
               -CG:cmp_peep=on -GRA:unspill=on -TENV:frame_pointer=off
               -L/root/work/libraries/SmartHeap-8.1/lib -lsmarheap
```

## Peak Other Flags

C benchmarks:

```
456.hmmr: -Mipa=jobs:4
```

C++ benchmarks:

```
473.astar: -Mipa=jobs:4(pass 2)
```

The flags files that were used to format this result can be browsed at

[http://www.spec.org/cpu2006/flags/pgi80\\_linux\\_flags.20090710.html](http://www.spec.org/cpu2006/flags/pgi80_linux_flags.20090710.html)  
<http://www.spec.org/cpu2006/flags/x86-open64-4.2.2-flags.html>  
<http://www.spec.org/cpu2006/flags/amd-platform.html>

You can also download the XML flags sources by saving the following links:

[http://www.spec.org/cpu2006/flags/pgi80\\_linux\\_flags.20090710.xml](http://www.spec.org/cpu2006/flags/pgi80_linux_flags.20090710.xml)  
<http://www.spec.org/cpu2006/flags/x86-open64-4.2.2-flags.xml>  
<http://www.spec.org/cpu2006/flags/amd-platform.xml>



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint\_rate2006 = 203

PowerEdge R805 (AMD Opteron 2435, 2.60 GHz)

SPECint\_rate\_base2006 = 160

CPU2006 license: 55

Test date: May-2009

Test sponsor: Dell Inc.

Hardware Availability: Jul-2009

Tested by: Dell Inc.

Software Availability: Apr-2009

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.  
Report generated on Wed Jul 23 02:31:23 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 21 July 2009.