



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint®_rate2006 = 247

PowerEdge T710 (Intel Xeon X5560, 2.80 GHz)

SPECint_rate_base2006 = 228

CPU2006 license: 55


Test date: Apr-2009

Test sponsor: Dell Inc.

Hardware Availability: Jun-2009

Tested by: Dell Inc.

Software Availability: Feb-2009

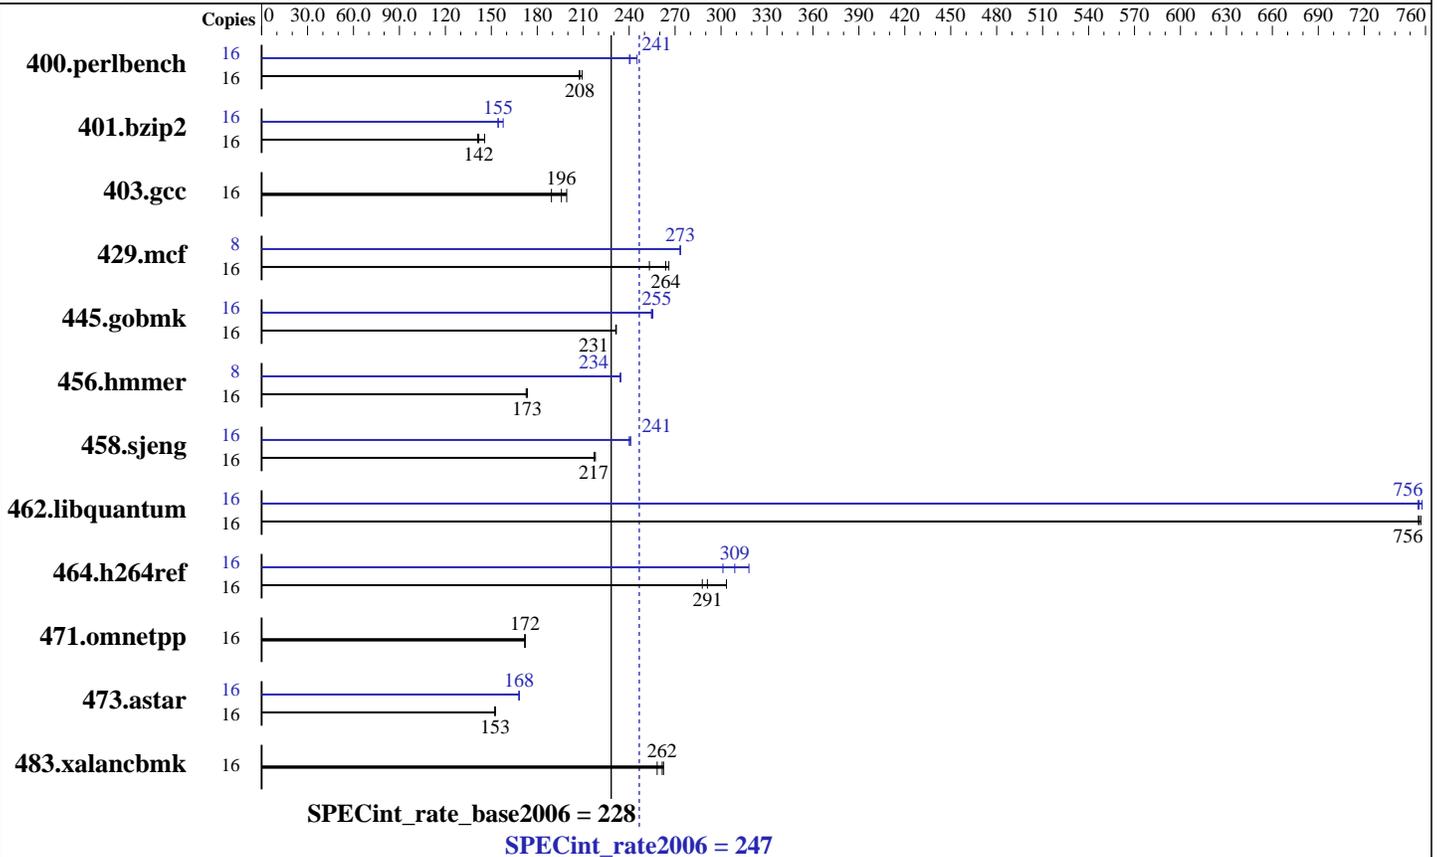

Hardware

CPU Name: Intel Xeon X5560
 CPU Characteristics: Intel Turbo Boost Technology up to 3.20 GHz
 CPU MHz: 2800
 FPU: Integrated
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 8 MB I+D on chip per chip
 Other Cache: None
 Memory: 24 GB (6 x 4 GB DDR3-1333 DR RDIMM)
 Disk Subsystem: 1 x 73 GB 15000 RPM SAS
 Other Hardware: None

Software

Operating System: SUSE Linux Enterprise Server 10 (x86_64) SP2, Kernel 2.6.16.60-0.21-smp
 Compiler: Intel C++ Compiler Professional 11.0 for Linux Build 20090131 Package ID: l_cproc_p_11.0.080
 Auto Parallel: No
 File System: ReiserFS
 System State: Run level 3 (multi-user)
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V8.1 Binutils 2.18.50.0.7.20080502



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint_rate2006 = 247

PowerEdge T710 (Intel Xeon X5560, 2.80 GHz)

SPECint_rate_base2006 = 228

CPU2006 license: 55
Test sponsor: Dell Inc.
Tested by: Dell Inc.

Test date: Apr-2009
Hardware Availability: Jun-2009
Software Availability: Feb-2009

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	16	753	207	<u>752</u>	<u>208</u>	747	209	16	638	245	651	240	<u>650</u>	<u>241</u>
401.bzip2	16	1094	141	<u>1089</u>	<u>142</u>	1060	146	16	979	158	<u>999</u>	<u>155</u>	1001	154
403.gcc	16	681	189	646	199	<u>658</u>	<u>196</u>	16	681	189	646	199	<u>658</u>	<u>196</u>
429.mcf	16	576	253	<u>553</u>	<u>264</u>	549	266	8	<u>267</u>	<u>273</u>	267	273	267	274
445.gobmk	16	725	232	726	231	<u>725</u>	<u>231</u>	16	659	255	657	255	<u>659</u>	<u>255</u>
456.hammer	16	<u>861</u>	<u>173</u>	864	173	861	173	8	318	234	319	234	<u>319</u>	<u>234</u>
458.sjeng	16	<u>891</u>	<u>217</u>	891	217	888	218	16	<u>804</u>	<u>241</u>	804	241	807	240
462.libquantum	16	<u>439</u>	<u>756</u>	439	755	438	757	16	439	755	<u>439</u>	<u>756</u>	437	758
464.h264ref	16	<u>1216</u>	<u>291</u>	1167	304	1230	288	16	<u>1146</u>	<u>309</u>	1113	318	1175	301
471.omnetpp	16	582	172	<u>581</u>	<u>172</u>	581	172	16	582	172	<u>581</u>	<u>172</u>	581	172
473.astar	16	738	152	<u>736</u>	<u>153</u>	736	153	16	<u>668</u>	<u>168</u>	668	168	668	168
483.xalancbmk	16	427	258	421	262	<u>422</u>	<u>262</u>	16	427	258	421	262	<u>422</u>	<u>262</u>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
numactl was used to bind copies to the cores

Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run

Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint_rate2006 = 247

PowerEdge T710 (Intel Xeon X5560, 2.80 GHz)

SPECint_rate_base2006 = 228

CPU2006 license: 55

Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: Apr-2009

Hardware Availability: Jun-2009

Software Availability: Feb-2009

Base Optimization Flags

C benchmarks:

```
-xSSE4.2 -ipo -O3 -no-prec-div -static -inline-calloc  
-opt-malloc-options=3 -opt-prefetch
```

C++ benchmarks:

```
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs  
-L/spec/cpu2006.1.1/lib -lsmartheap
```

Base Other Flags

C benchmarks:

```
403.gcc: -Dalloca=_alloca
```

Peak Compiler Invocation

C benchmarks (except as noted below):

icc

```
401.bzip2: /opt/intel/Compiler/11.0/080/bin/intel64/icc
```

```
456.hmmer: /opt/intel/Compiler/11.0/080/bin/intel64/icc
```

```
458.sjeng: /opt/intel/Compiler/11.0/080/bin/intel64/icc
```

C++ benchmarks (except as noted below):

icpc

```
473.astar: /opt/intel/Compiler/11.0/080/bin/intel64/icpc
```

Peak Portability Flags

```
400.perlbench: -DSPEC_CPU_LINUX_IA32
```

```
401.bzip2: -DSPEC_CPU_LP64
```

```
456.hmmer: -DSPEC_CPU_LP64
```

```
458.sjeng: -DSPEC_CPU_LP64
```

```
462.libquantum: -DSPEC_CPU_LINUX
```

```
473.astar: -DSPEC_CPU_LP64
```

```
483.xalancbmk: -DSPEC_CPU_LINUX
```



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint_rate2006 = 247

PowerEdge T710 (Intel Xeon X5560, 2.80 GHz)

SPECint_rate_base2006 = 228

CPU2006 license: 55

Test date: Apr-2009

Test sponsor: Dell Inc.

Hardware Availability: Jun-2009

Tested by: Dell Inc.

Software Availability: Feb-2009

Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
 -prof-use(pass 2) -ansi-alias -opt-prefetch

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
 -prof-use(pass 2) -opt-prefetch -ansi-alias -auto-ilp32

403.gcc: basepeak = yes

429.mcf: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
 -prof-use(pass 2) -opt-prefetch

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2) -O2
 -ipo -no-prec-div -ansi-alias

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -static -unroll2
 -ansi-alias -auto-ilp32

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
 -prof-use(pass 2) -unroll4 -auto-ilp32

462.libquantum: -xSSE4.2 -ipo -O3 -no-prec-div -static
 -opt-malloc-options=3 -opt-prefetch

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
 -prof-use(pass 2) -unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: basepeak = yes

473.astar: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
 -ansi-alias -opt-ra-region-strategy=routine -auto-ilp32
 -Wl,-z,muldefs -L/spec/cpu2006.1.1/lib -lsmartheap64

483.xalanbmk: basepeak = yes

Peak Other Flags

C benchmarks:

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint_rate2006 = 247

PowerEdge T710 (Intel Xeon X5560, 2.80 GHz)

SPECint_rate_base2006 = 228

CPU2006 license: 55

Test date: Apr-2009

Test sponsor: Dell Inc.

Hardware Availability: Jun-2009

Tested by: Dell Inc.

Software Availability: Feb-2009

Peak Other Flags (Continued)

403.gcc: -Dalloca=_alloca

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-int-linux64-revA.20090805.01.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-int-linux64-revA.20090805.01.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 02:55:11 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 15 September 2009.