



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp®2006 = **33.2**

IBM System x3250 M3 (Intel Xeon X3440)

SPECfp_base2006 = **31.8**

CPU2006 license: 11


Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Oct-2009

Hardware Availability: Oct-2009

Software Availability: Mar-2009

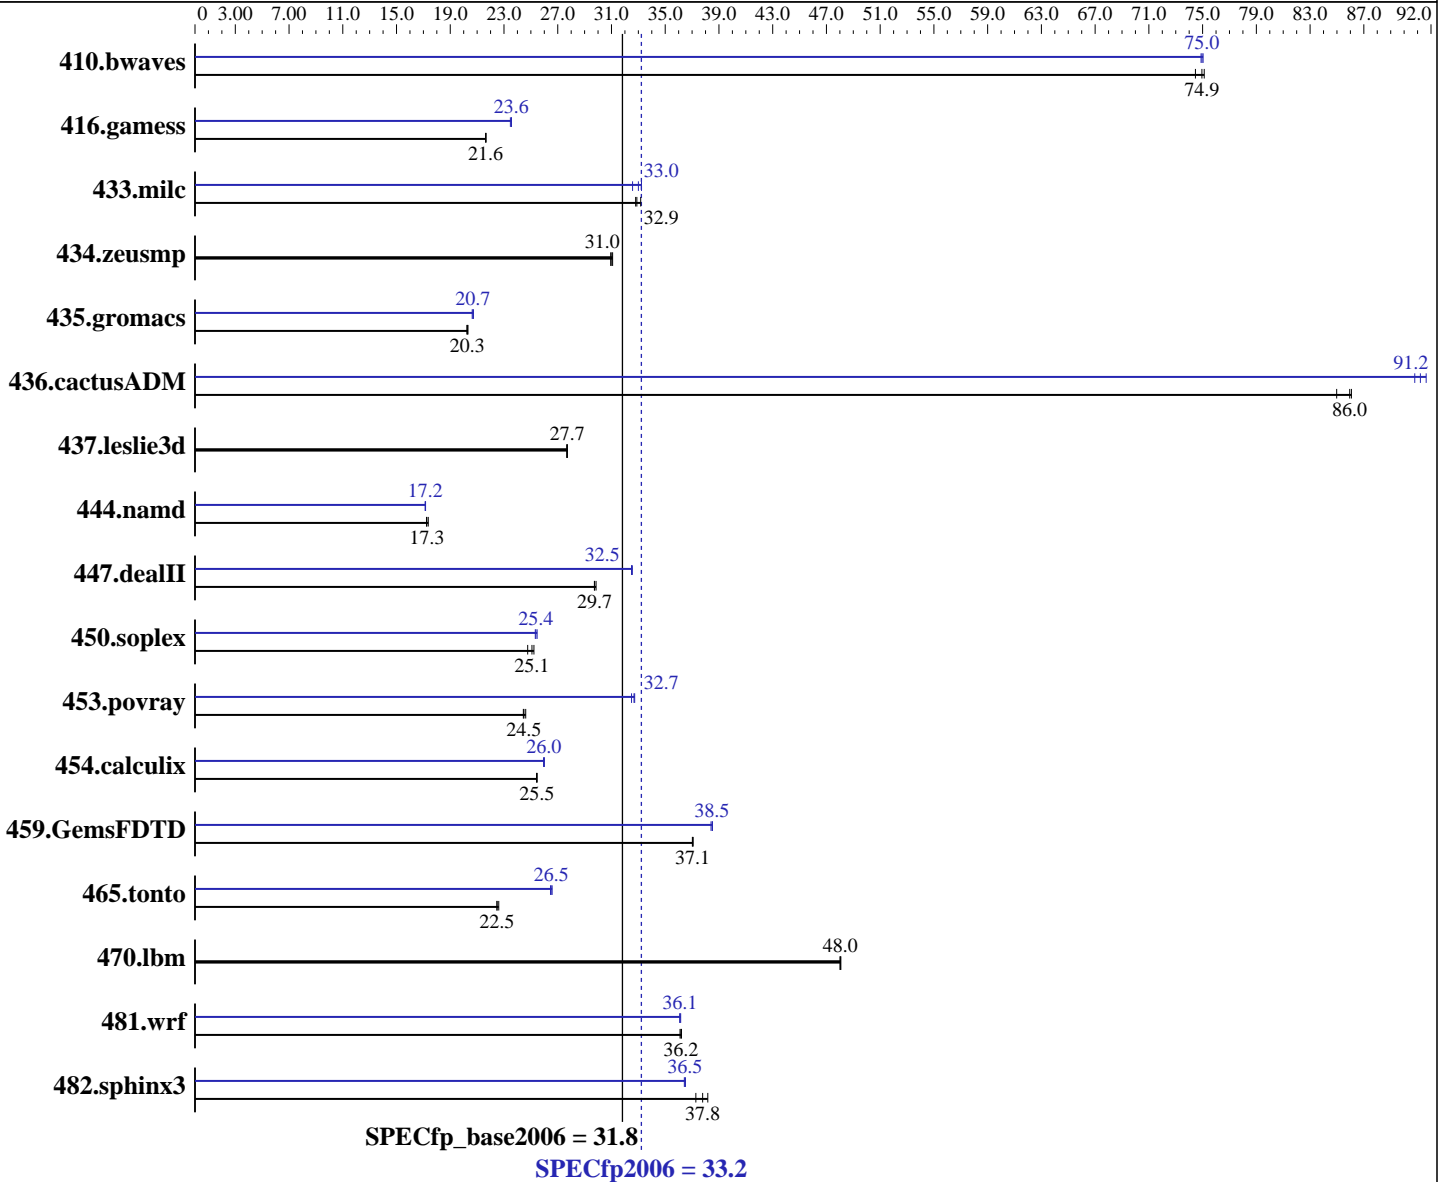

Hardware

CPU Name: Intel Xeon X3440
 CPU Characteristics: Intel Turbo Boost Technology up to 2.93 GHz
 CPU MHz: 2533
 FPU: Integrated
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip, 2 threads/core
 CPU(s) orderable: 1 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: SuSE Linux Enterprise Server 11 (x86_64), Kernel 2.6.27.19-5-default
 Compiler: Intel C++ and Fortran Compiler 11.0 for Linux Build 20090131 Package ID: l_cproc_p_11.0.080, l_cprof_p_11.0.080
 Auto Parallel: Yes
 File System: ext3
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp2006 = **33.2**

IBM System x3250 M3 (Intel Xeon X3440)

SPECfp_base2006 = **31.8**

CPU2006 license: 11

Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Oct-2009

Hardware Availability: Oct-2009

Software Availability: Mar-2009

L3 Cache: 8 MB I+D on chip per chip
Other Cache: None
Memory: 16 GB (4 x 4 GB PC3-10600R)
Disk Subsystem: 1 x 73 GB SAS, 15000RPM
Other Hardware: None

Peak Pointers: 32/64-bit
Other Software: Binutils 2.18.50.0.7.20080502

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	183	74.5	181	75.1	<u>181</u>	<u>74.9</u>	181	75.0	181	74.9	<u>181</u>	<u>75.0</u>
416.gamess	<u>905</u>	<u>21.6</u>	905	21.6	904	21.7	831	23.6	<u>831</u>	<u>23.6</u>	834	23.5
433.milc	277	33.2	<u>279</u>	<u>32.9</u>	280	32.8	282	32.6	276	33.2	<u>278</u>	<u>33.0</u>
434.zeusmp	<u>293</u>	<u>31.0</u>	294	30.9	293	31.1	<u>293</u>	<u>31.0</u>	294	30.9	293	31.1
435.gromacs	351	20.3	353	20.2	<u>352</u>	<u>20.3</u>	344	20.7	346	20.6	<u>345</u>	<u>20.7</u>
436.cactusADM	139	86.1	141	85.0	<u>139</u>	<u>86.0</u>	132	90.8	130	91.6	<u>131</u>	<u>91.2</u>
437.leslie3d	<u>339</u>	<u>27.7</u>	339	27.7	340	27.7	<u>339</u>	<u>27.7</u>	339	27.7	340	27.7
444.namd	<u>465</u>	<u>17.3</u>	462	17.4	465	17.2	468	17.1	<u>468</u>	<u>17.2</u>	467	17.2
447.dealII	383	29.9	385	29.7	<u>385</u>	<u>29.7</u>	352	32.5	351	32.6	<u>352</u>	<u>32.5</u>
450.soplex	337	24.8	331	25.2	<u>333</u>	<u>25.1</u>	327	25.5	329	25.3	<u>329</u>	<u>25.4</u>
453.povray	218	24.4	216	24.6	<u>217</u>	<u>24.5</u>	164	32.5	<u>163</u>	<u>32.7</u>	163	32.7
454.calculix	325	25.4	<u>324</u>	<u>25.5</u>	324	25.5	<u>317</u>	<u>26.0</u>	317	26.0	318	25.9
459.GemsFDTD	<u>286</u>	<u>37.1</u>	287	37.0	286	37.1	275	38.5	<u>276</u>	<u>38.5</u>	276	38.4
465.tonto	<u>438</u>	<u>22.5</u>	435	22.6	438	22.5	<u>371</u>	<u>26.5</u>	372	26.5	370	26.6
470.lbm	<u>286</u>	<u>48.0</u>	286	48.1	286	48.0	<u>286</u>	<u>48.0</u>	286	48.1	286	48.0
481.wrf	308	36.2	<u>309</u>	<u>36.2</u>	309	36.1	310	36.1	309	36.1	<u>309</u>	<u>36.1</u>
482.sphinx3	511	38.2	<u>516</u>	<u>37.8</u>	523	37.3	534	36.5	535	36.4	<u>534</u>	<u>36.5</u>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

General Notes

'ulimit -s unlimited' was used to set the stack size to unlimited prior to run
CPU C-States Enable and Adjacent Sector Prefetch Enable
Turbo Mode Enable
OMP_NUM_THREADS set to number of cores
KMP_AFFINITY set to granularity=fine,scatter
KMP_STACKSIZE set to 200M

Base Compiler Invocation

C benchmarks:
icc

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp2006 = 33.2

IBM System x3250 M3 (Intel Xeon X3440)

SPECfp_base2006 = 31.8

CPU2006 license: 11

Test date: Oct-2009

Test sponsor: IBM Corporation

Hardware Availability: Oct-2009

Tested by: IBM Corporation

Software Availability: Mar-2009

Base Compiler Invocation (Continued)

C++ benchmarks:
icpc

Fortran benchmarks:
ifort

Benchmarks using both Fortran and C:
icc ifort

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
 416.gamess: -DSPEC_CPU_LP64
 433.milc: -DSPEC_CPU_LP64
 434.zeusmp: -DSPEC_CPU_LP64
 435.gromacs: -DSPEC_CPU_LP64 -nofor_main
 436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
 437.leslie3d: -DSPEC_CPU_LP64
 444.namd: -DSPEC_CPU_LP64
 447.dealII: -DSPEC_CPU_LP64
 450.soplex: -DSPEC_CPU_LP64
 453.povray: -DSPEC_CPU_LP64
 454.calculix: -DSPEC_CPU_LP64 -nofor_main
 459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
 482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

C++ benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Fortran benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Benchmarks using both Fortran and C:
-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp2006 = 33.2

IBM System x3250 M3 (Intel Xeon X3440)

SPECfp_base2006 = 31.8

CPU2006 license: 11

Test date: Oct-2009

Test sponsor: IBM Corporation

Hardware Availability: Oct-2009

Tested by: IBM Corporation

Software Availability: Mar-2009

Peak Compiler Invocation

C benchmarks (except as noted below):

icc

482.sphinx3: icc -m32

C++ benchmarks (except as noted below):

icpc

450.soplex: icpc -m32

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

icc ifort

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
 416.gamess: -DSPEC_CPU_LP64
 433.milc: -DSPEC_CPU_LP64
 434.zeusmp: -DSPEC_CPU_LP64
 435.gromacs: -DSPEC_CPU_LP64 -nofor_main
 436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
 437.leslie3d: -DSPEC_CPU_LP64
 444.namd: -DSPEC_CPU_LP64
 447.dealII: -DSPEC_CPU_LP64
 453.povray: -DSPEC_CPU_LP64
 454.calculix: -DSPEC_CPU_LP64 -nofor_main
 459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

433.milc: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
 -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
 -fno-alias

470.lbm: basepeak = yes

482.sphinx3: -xSSE4.2 -ipo -O3 -no-prec-div -static -unroll2

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp2006 = 33.2

IBM System x3250 M3 (Intel Xeon X3440)

SPECfp_base2006 = 31.8

CPU2006 license: 11

Test date: Oct-2009

Test sponsor: IBM Corporation

Hardware Availability: Oct-2009

Tested by: IBM Corporation

Software Availability: Mar-2009

Peak Optimization Flags (Continued)

C++ benchmarks:

444.namd: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-fno-alias -auto-ilp32

447.dealIII: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll2 -ansi-alias -scalar-rep- -opt-prefetch

450.soplex: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-opt-malloc-options=3

453.povray: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch
-parallel

416.gamess: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll2 -Ob0 -ansi-alias -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll2 -Ob0 -opt-prefetch -parallel

465.tonto: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll4 -auto

Benchmarks using both Fortran and C:

435.gromacs: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-opt-prefetch -auto-ilp32

436.cactusADM: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll2 -opt-prefetch -parallel -auto-ilp32

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp2006 = 33.2

IBM System x3250 M3 (Intel Xeon X3440)

SPECfp_base2006 = 31.8

CPU2006 license: 11

Test date: Oct-2009

Test sponsor: IBM Corporation

Hardware Availability: Oct-2009

Tested by: IBM Corporation

Software Availability: Mar-2009

Peak Optimization Flags (Continued)

454.calculix: -xSSE4.2 -ipo -O3 -no-prec-div -static -auto-ilp32

481.wrf: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch
-parallel -auto-ilp32

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-fp-linux64-revA.20091028.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-fp-linux64-revA.20091028.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 04:59:51 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 23 November 2009.