



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint®_rate2006 = 319

PowerEdge R715 (AMD Opteron 6164 HE, 1.70 GHz)

SPECint_rate_base2006 = 255

CPU2006 license: 55


Test date: Jun-2010

Test sponsor: Dell Inc.

Hardware Availability: May-2010

Tested by: Dell Inc.

Software Availability: Feb-2010

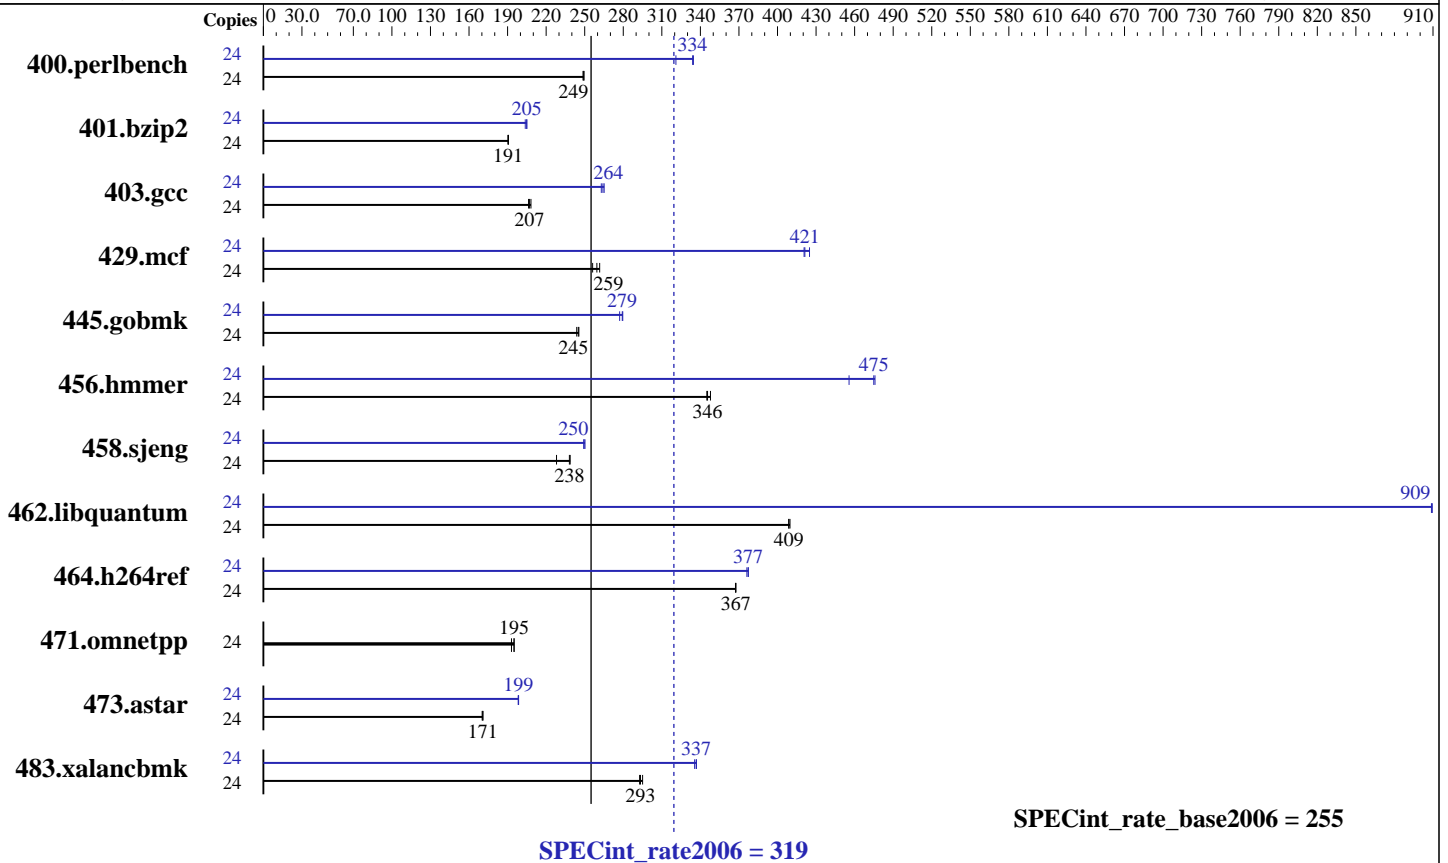

Hardware

CPU Name: AMD Opteron 6164 HE
 CPU Characteristics:
 CPU MHz: 1700
 FPU: Integrated
 CPU(s) enabled: 24 cores, 2 chips, 12 cores/chip
 CPU(s) orderable: 2,4 chips
 Primary Cache: 64 KB I + 64 KB D on chip per core
 Secondary Cache: 512 KB I+D on chip per core
 L3 Cache: 12 MB I+D on chip per chip, 6 MB shared / 6 cores
 Other Cache: None
 Memory: 64 GB (16 x 4 GB DDR3-1333 DR RDIMM, CL9, ECC)
 Disk Subsystem: 1 x 148 GB 10000 RPM SAS
 Other Hardware: None

Software

Operating System: SUSE Linux Enterprise Server 11 (x86_64), Kernel 2.6.27.19-5-smp
 Compiler: x86 Open64 4.2.3 Compiler Suite (from AMD)
 Auto Parallel: No
 File System: ext3
 System State: Run level 3 (Full multiuser with network)
 Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: SmartHeap 8.1 32-bit Library for Linux



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint_rate2006 = 319

PowerEdge R715 (AMD Opteron 6164 HE, 1.70 GHz)

SPECint_rate_base2006 = 255

CPU2006 license: 55

Test date: Jun-2010

Test sponsor: Dell Inc.

Hardware Availability: May-2010

Tested by: Dell Inc.

Software Availability: Feb-2010

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	24	940	249	<u>941</u>	<u>249</u>	943	249	24	731	321	<u>702</u>	<u>334</u>	701	335
401.bzip2	24	1217	190	<u>1215</u>	<u>191</u>	1215	191	24	1137	204	1130	205	<u>1131</u>	<u>205</u>
403.gcc	24	<u>933</u>	<u>207</u>	928	208	936	206	24	735	263	729	265	<u>731</u>	<u>264</u>
429.mcf	24	837	262	854	256	<u>844</u>	<u>259</u>	24	520	421	515	425	<u>520</u>	<u>421</u>
445.gobmk	24	1033	244	<u>1028</u>	<u>245</u>	1026	245	24	900	280	908	277	<u>902</u>	<u>279</u>
456.hammer	24	<u>648</u>	<u>346</u>	644	348	649	345	24	<u>472</u>	<u>475</u>	491	456	471	476
458.sjeng	24	1273	228	1217	239	<u>1220</u>	<u>238</u>	24	1165	249	1160	250	<u>1164</u>	<u>250</u>
462.libquantum	24	1216	409	<u>1216</u>	<u>409</u>	1214	410	24	<u>547</u>	<u>909</u>	547	909	547	909
464.h264ref	24	<u>1445</u>	<u>367</u>	1445	368	1446	367	24	1412	376	1408	377	<u>1408</u>	<u>377</u>
471.omnetpp	24	769	195	777	193	<u>769</u>	<u>195</u>	24	769	195	777	193	<u>769</u>	<u>195</u>
473.astar	24	990	170	986	171	<u>987</u>	<u>171</u>	24	849	199	850	198	<u>849</u>	<u>199</u>
483.xalancbmk	24	566	293	<u>564</u>	<u>293</u>	561	295	24	494	336	491	337	<u>492</u>	<u>337</u>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152' was used to set environment locked pages in memory limit

Set vm/nr_hugepages=10800 in /etc/sysctl.conf
mount -t hugetlbfs nodev /mnt/hugepages

General Notes

Environment variables set by runspec before the start of the run:
HUGETLB_LIMIT = "450"
LD_LIBRARY_PATH = "/cpu2006/amd1002mc-rate-revA-libs/64:/cpu2006/amd1002mc-rate-revA-libs/32"

The x86 Open64 Compiler Suite is only available from (and supported by) AMD at
<http://developer.amd.com/cpu/open64>

Binaries were compiled on SLES10 SP2 with binutils 2.18



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint_rate2006 = 319

PowerEdge R715 (AMD Opteron 6164 HE, 1.70 GHz)

SPECint_rate_base2006 = 255

CPU2006 license: 55
Test sponsor: Dell Inc.
Tested by: Dell Inc.

Test date: Jun-2010
Hardware Availability: May-2010
Software Availability: Feb-2010

Base Compiler Invocation

C benchmarks:
opencc

C++ benchmarks:
openCC

Base Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
-march=barcelona -mso -Ofast -CG:local_sched_alg=1 -HP:bdt=2m:heap=2m

C++ benchmarks:
-march=barcelona -mso -Ofast -m32 -INLINE:aggressive=on
-CG:cmp_peep=on -L/root/work/libraries/SmartHeap-8.1/lib -lsmartheap

Peak Compiler Invocation

C benchmarks:
opencc

C++ benchmarks:
openCC

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint_rate2006 = 319

PowerEdge R715 (AMD Opteron 6164 HE, 1.70 GHz)

SPECint_rate_base2006 = 255

CPU2006 license: 55

Test date: Jun-2010

Test sponsor: Dell Inc.

Hardware Availability: May-2010

Tested by: Dell Inc.

Software Availability: Feb-2010

Peak Portability Flags (Continued)

456.hmmer: -DSPEC_CPU_LP64
 458.sjeng: -DSPEC_CPU_LP64
 462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
 464.h264ref: -DSPEC_CPU_LP64
 483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -march=barcelona -mso -fb_create fbdata(pass 1)
 -fb_opt fbdata(pass 2) -Ofast -IPA:plimit=20000 -LNO:opt=0
 -OPT:unroll_times_max=8 -OPT:unroll_size=256
 -OPT:unroll_level=2 -OPT:keep_ext=on -WOPT:if_conv=0
 -CG:local_sched_alg=1 -CG:unroll_fb_req=on
 -HP:bdt=2m:heap=2m

401.bzip2: -march=barcelona -mso -fb_create fbdata(pass 1)
 -fb_opt fbdata(pass 2) -O3 -OPT:alias=disjoint
 -OPT:goto=off -CG:local_sched_alg=1 -HP:bdt=2m:heap=2m

403.gcc: -march=barcelona -mso -fb_create fbdata(pass 1)
 -fb_opt fbdata(pass 2) -Ofast -LNO:trip_count=256
 -LNO:prefetch_ahead=10 -CG:cmp_peep=on -m32
 -HP:bdt=2m:heap=2m -GRA:unspill=on -IPA:small_pu=200

429.mcf: -march=barcelona -mso -O3 -ipa -INLINE:aggressive=on
 -CG:gcm=off -GRA:prioritize_by_density=on -m32
 -HP:bdt=2m:heap=2m

445.gobmk: -march=barcelona -mso -fb_create fbdata(pass 1)
 -fb_opt fbdata(pass 2) -O3 -OPT:alias=restrict
 -OPT:unroll_times_max=8 -OPT:unroll_size=256
 -OPT:unroll_level=2 -OPT:keep_ext=on -ipa -IPA:plimit=750
 -IPA:min_hotness=300 -IPA:pu_reorder=1 -LNO:prefetch=1
 -LNO:ignore_feedback=off -CG:p2align=on
 -CG:unroll_fb_req=on -HP:bdt=2m:heap=2m

456.hmmer: -march=barcelona -mso -fb_create fbdata(pass 1)
 -fb_opt fbdata(pass 2) -Ofast -LNO:prefetch=0
 -OPT:alias=disjoint -OPT:unroll_times_max=8
 -OPT:unroll_size=256 -OPT:unroll_level=2 -OPT:keep_ext=on
 -CG:local_sched_alg=1 -CG:cflow=0
 -CG:push_pop_int_saved_regs=off -CG:cmp_peep=on
 -HP:bdt=2m:heap=2m

458.sjeng: -march=barcelona -mso -fb_create fbdata(pass 1)
 -fb_opt fbdata(pass 2) -O3 -ipa -LNO:ignore_feedback=off
 -LNO:full_unroll=10 -LNO:fusion=0 -LNO:fission=2

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint_rate2006 = 319

PowerEdge R715 (AMD Opteron 6164 HE, 1.70 GHz)

SPECint_rate_base2006 = 255

CPU2006 license: 55

Test date: Jun-2010

Test sponsor: Dell Inc.

Hardware Availability: May-2010

Tested by: Dell Inc.

Software Availability: Feb-2010

Peak Optimization Flags (Continued)

458.sjeng (continued):

-IPA:pu_reorder=2 -CG:ptr_load_use=0
-OPT:unroll_times_max=8 -INLINE:aggressive=on

462.libquantum: -march=barcelona -mso -Ofast -LNO:pf2=0 -CG:gcm=off
-CG:use_prefetchnta=on -CG:cmp_peep=on -WOPT:aggstr=0
-HP:bdt=2m:heap=2m -OPT:alias=disjoint
-INLINE:aggressive=on -IPA:space=1000 -IPA:plimit=20000

464.h264ref: -march=barcelona -mso -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -O3 -IPA:plimit=20000
-OPT:alias=disjoint -LNO:prefetch=0 -CG:ptr_load_use=0
-CG:push_pop_int_saved_regs=off

C++ benchmarks:

471.omnetpp: basepeak = yes

473.astar: -march=barcelona -mso -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -TENV:frame_pointer=off
-WOPT:if_conv=0 -GRA:optimize_boundary=on
-OPT:alias=disjoint -INLINE:aggressive=on
-IPA:small_pu=3000 -IPA:plimit=3000 -m32
-HP:bdt=2m:heap=2m

483.xalancbmk: -march=barcelona -mso -Ofast -INLINE:aggressive=on -m32
-CG:cmp_peep=on -GRA:unspill=on -TENV:frame_pointer=off
-fno-emit-exceptions
-L/root/work/libraries/SmartHeap-8.1/lib -lsmarheap

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/x86-open64-4.2.3-flags-revA.20100721.html>

<http://www.spec.org/cpu2006/flags/amd-platform-revA.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/x86-open64-4.2.3-flags-revA.20100721.xml>

<http://www.spec.org/cpu2006/flags/amd-platform-revA.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.

Report generated on Wed Jul 23 11:13:56 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 20 July 2010.