



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Bull SAS

SPECfp<sup>®</sup>2006 = **63.9**

NovaScale T860 F2 (Intel Xeon X5687, 3.60 GHz)

SPECfp\_base2006 = **61.6**

CPU2006 license: 20


Test sponsor: Bull SAS

Tested by: Dell Inc.

Test date: Mar-2011

Hardware Availability: Feb-2011

Software Availability: Apr-2011

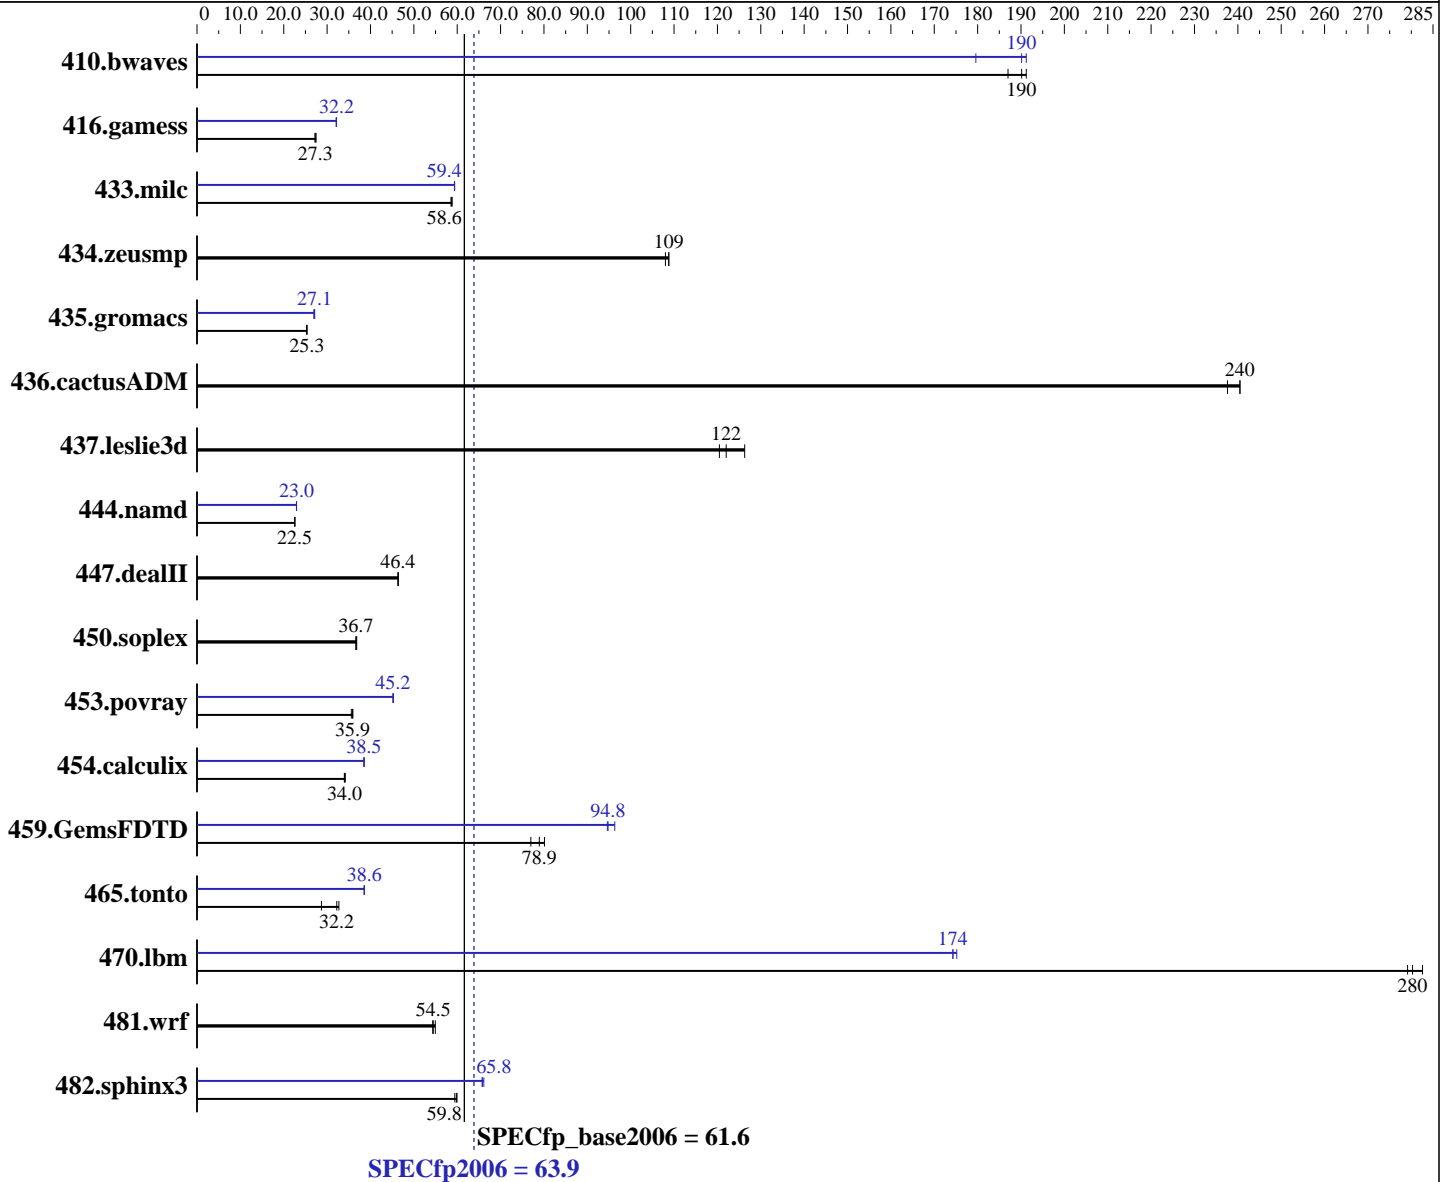

### Hardware

CPU Name: Intel Xeon X5687  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.86 GHz  
 CPU MHz: 3600  
 FPU: Integrated  
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

### Software

Operating System: SUSE Linux Enterprise Server 11 SP1 (x86\_64), Kernel 2.6.32.12-0.7-default  
 Compiler: Intel C++ and Fortran Intel 64 Compiler XE for applications running on Intel 64 Version 12.0 Update 3  
 Auto Parallel: Yes  
 File System: ext3  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Bull SAS

SPECfp2006 = **63.9**

NovaScale T860 F2 (Intel Xeon X5687, 3.60 GHz)

SPECfp\_base2006 = **61.6**

CPU2006 license: 20

Test date: Mar-2011

Test sponsor: Bull SAS

Hardware Availability: Feb-2011

Tested by: Dell Inc.

Software Availability: Apr-2011

L3 Cache: 12 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 48 GB (12 x 4 GB 2Rx4 PC3-10600R-9, ECC)  
 Disk Subsystem: 1 x 146 GB 15000 RPM SAS  
 Other Hardware: None

Peak Pointers: 32/64-bit  
 Other Software: None

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	72.7	187	<b><u>71.5</u></b>	<b><u>190</u></b>	71.1	191	75.7	180	<b><u>71.5</u></b>	<b><u>190</u></b>	71.1	191
416.gamess	<b><u>718</u></b>	<b><u>27.3</u></b>	719	27.2	713	27.5	609	32.2	610	32.1	<b><u>609</u></b>	<b><u>32.2</u></b>
433.milc	156	58.8	<b><u>157</u></b>	<b><u>58.6</u></b>	157	58.6	<b><u>155</u></b>	<b><u>59.4</u></b>	155	59.4	155	59.4
434.zeusmp	83.7	109	84.3	108	<b><u>83.7</u></b>	<b><u>109</u></b>	83.7	109	84.3	108	<b><u>83.7</u></b>	<b><u>109</u></b>
435.gromacs	282	25.3	282	25.3	<b><u>282</u></b>	<b><u>25.3</u></b>	265	26.9	263	27.1	<b><u>263</u></b>	<b><u>27.1</u></b>
436.cactusADM	<b><u>49.7</u></b>	<b><u>240</u></b>	50.3	238	49.7	240	<b><u>49.7</u></b>	<b><u>240</u></b>	50.3	238	49.7	240
437.leslie3d	74.4	126	78.0	120	<b><u>77.0</u></b>	<b><u>122</u></b>	74.4	126	78.0	120	<b><u>77.0</u></b>	<b><u>122</u></b>
444.namd	356	22.6	<b><u>356</u></b>	<b><u>22.5</u></b>	356	22.5	<b><u>349</u></b>	<b><u>23.0</u></b>	350	22.9	349	23.0
447.dealII	247	46.4	247	46.4	<b><u>247</u></b>	<b><u>46.4</u></b>	247	46.4	247	46.4	<b><u>247</u></b>	<b><u>46.4</u></b>
450.soplex	226	36.8	<b><u>227</u></b>	<b><u>36.7</u></b>	228	36.6	226	36.8	<b><u>227</u></b>	<b><u>36.7</u></b>	228	36.6
453.povray	<b><u>148</u></b>	<b><u>35.9</u></b>	149	35.6	148	35.9	117	45.3	<b><u>118</u></b>	<b><u>45.2</u></b>	118	45.2
454.calculix	241	34.2	<b><u>242</u></b>	<b><u>34.0</u></b>	243	34.0	<b><u>214</u></b>	<b><u>38.5</u></b>	214	38.5	214	38.5
459.GemsFDTD	138	77.0	<b><u>134</u></b>	<b><u>78.9</u></b>	132	80.1	112	94.6	110	96.3	<b><u>112</u></b>	<b><u>94.8</u></b>
465.tonto	301	32.7	343	28.7	<b><u>305</u></b>	<b><u>32.2</u></b>	255	38.5	255	38.6	<b><u>255</u></b>	<b><u>38.6</u></b>
470.lbm	48.6	283	<b><u>49.0</u></b>	<b><u>280</u></b>	49.2	279	78.4	175	78.8	174	<b><u>78.8</u></b>	<b><u>174</u></b>
481.wrf	203	54.9	205	54.4	<b><u>205</u></b>	<b><u>54.5</u></b>	203	54.9	205	54.4	<b><u>205</u></b>	<b><u>54.5</u></b>
482.sphinx3	325	60.0	328	59.4	<b><u>326</u></b>	<b><u>59.8</u></b>	296	65.8	295	66.1	<b><u>296</u></b>	<b><u>65.8</u></b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

```
'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run
'mount -t hugetlbfs nodev /mnt/hugepages' was used to enable large pages
echo 900 > /proc/sys/vm/nr_hugepages
export HUGETLB_MORECORE=yes
export LD_PRELOAD=/usr/lib64/libhugetlbfs.so
```

## Platform Notes

BIOS Settings:  
 Power Management = Maximum Performance (Default = Active Power Controller)  
 Data Reuse = Disabled (Default = Enabled)  
 Logical Processor = Disabled (Default = Enabled)



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Bull SAS**

**SPECfp2006 = 63.9**

NovaScale T860 F2 (Intel Xeon X5687, 3.60 GHz)

**SPECfp\_base2006 = 61.6**

**CPU2006 license:** 20

**Test sponsor:** Bull SAS

**Tested by:** Dell Inc.

**Test date:** Mar-2011

**Hardware Availability:** Feb-2011

**Software Availability:** Apr-2011

## General Notes

OMP\_NUM\_THREADS set to number of cores  
The Dell PowerEdge T710 and  
the Bull NovaScale T860 F2 models are electronically equivalent.  
The results have been measured on a Dell PowerEdge T710 model.  
Binaries were compiled on RHEL5.5

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.deallI: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch  
-ansi-alias

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Bull SAS

**SPECfp2006 = 63.9**

NovaScale T860 F2 (Intel Xeon X5687, 3.60 GHz)

**SPECfp\_base2006 = 61.6**

**CPU2006 license:** 20

**Test date:** Mar-2011

**Test sponsor:** Bull SAS

**Hardware Availability:** Feb-2011

**Tested by:** Dell Inc.

**Software Availability:** Apr-2011

## Base Optimization Flags (Continued)

C++ benchmarks:

`-xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch -ansi-alias`

Fortran benchmarks:

`-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch`

Benchmarks using both Fortran and C:

`-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch  
-ansi-alias`

## Peak Compiler Invocation

C benchmarks:

`icc -m64`

C++ benchmarks:

`icpc -m64`

Fortran benchmarks:

`ifort -m64`

Benchmarks using both Fortran and C:

`icc -m64 ifort -m64`

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

433.milc: `-xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32  
-ansi-alias`

470.lbm: `-xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -parallel  
-ansi-alias -static -auto-ilp32`

482.sphinx3: `-xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -ansi-alias  
-parallel`

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Bull SAS**

**SPECfp2006 = 63.9**

NovaScale T860 F2 (Intel Xeon X5687, 3.60 GHz)

**SPECfp\_base2006 = 61.6**

**CPU2006 license:** 20

**Test date:** Mar-2011

**Test sponsor:** Bull SAS

**Hardware Availability:** Feb-2011

**Tested by:** Dell Inc.

**Software Availability:** Apr-2011

## Peak Optimization Flags (Continued)

C++ benchmarks:

444.namd: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -fno-alias  
-auto-ilp32

447.dealIII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias  
-B /usr/share/libhugetlbfs/ -Wl,-melf\_x86\_64 -Wl,-hugetlbfs-link=BDT

Fortran benchmarks:

410.bwaves: -xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -parallel  
-static

416.gamess: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -scalar-rep- -static

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -opt-prefetch -parallel  
-B /usr/share/libhugetlbfs/ -Wl,-melf\_x86\_64 -Wl,-hugetlbfs-link=BDT

465.tonto: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -inline-calloc  
-opt-malloc-options=3 -auto -unroll4  
-B /usr/share/libhugetlbfs/ -Wl,-melf\_x86\_64 -Wl,-hugetlbfs-link=BDT

Benchmarks using both Fortran and C:

435.gromacs: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32  
-ansi-alias

436.cactusADM: basepeak = yes

454.calculix: -xSSE4.2 -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Bull SAS

**SPECfp2006 = 63.9**

NovaScale T860 F2 (Intel Xeon X5687, 3.60 GHz)

**SPECfp\_base2006 = 61.6**

**CPU2006 license:** 20

**Test sponsor:** Bull SAS

**Tested by:** Dell Inc.

**Test date:** Mar-2011

**Hardware Availability:** Feb-2011

**Software Availability:** Apr-2011

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.html>

<http://www.spec.org/cpu2006/flags/Intel-Linux64-Platform.20110426.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.xml>

<http://www.spec.org/cpu2006/flags/Intel-Linux64-Platform.20110426.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.  
Report generated on Wed Jul 23 18:50:58 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 26 April 2011.