



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECint®_rate2006 = 176

ProLiant BL460c Gen8
(1.80 GHz, Intel Xeon E5-2603)

SPECint_rate_base2006 = 169

CPU2006 license: 3


Test date: Apr-2012

Test sponsor: Hewlett-Packard Company

Hardware Availability: Jun-2012

Tested by: Hewlett-Packard Company

Software Availability: Mar-2012

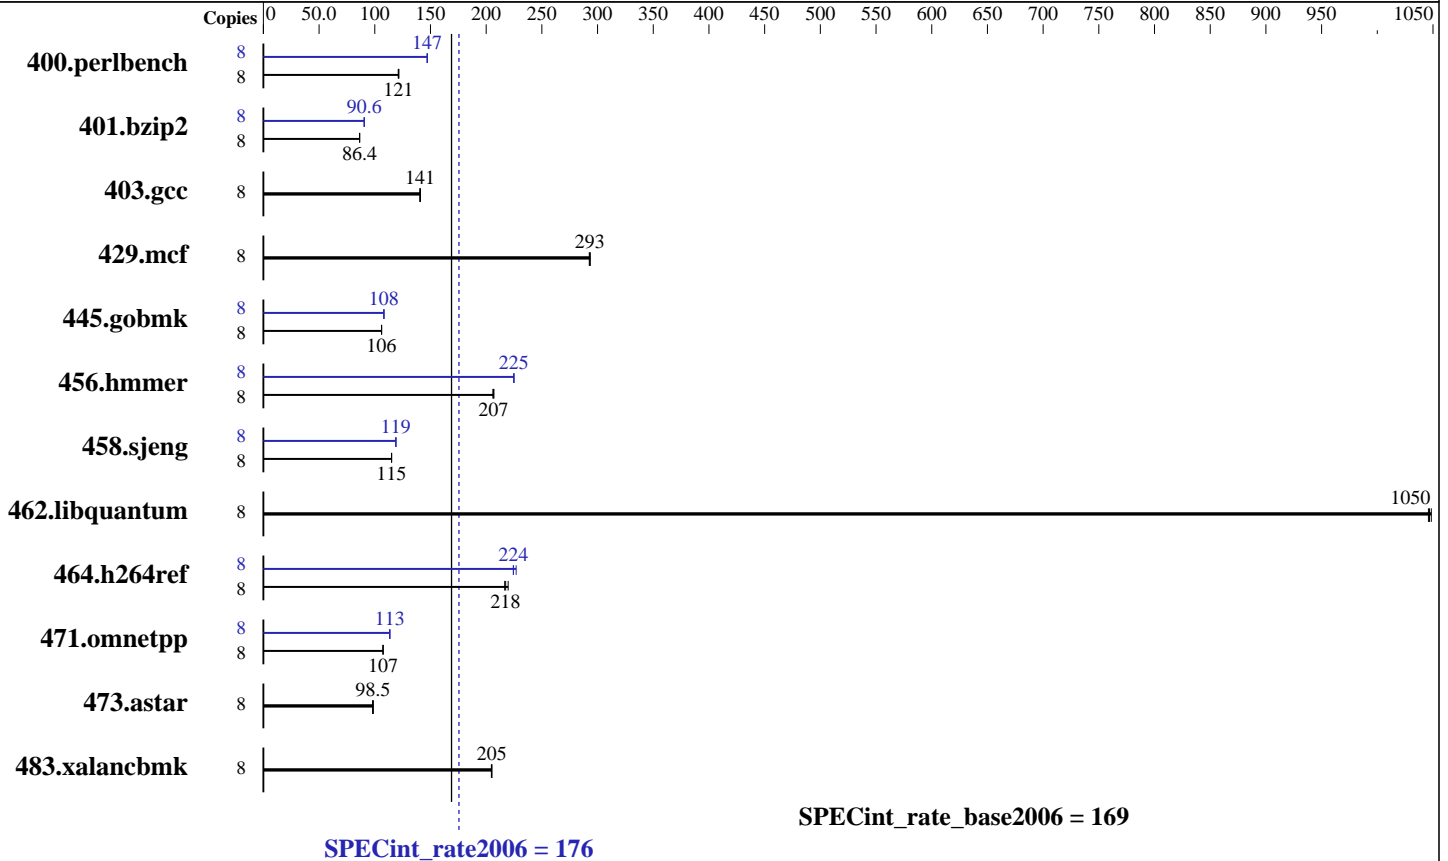

SPECint_rate_base2006 = 169

Hardware

CPU Name: Intel Xeon E5-2603
 CPU Characteristics:
 CPU MHz: 1800
 FPU: Integrated
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 10 MB I+D on chip per chip
 Other Cache: None
 Memory: 128 GB (16 x 8 GB 2Rx4 PC3-12800R-11, ECC, running at 1066 MHz and CL7)
 Disk Subsystem: 2 x 146 GB 15 K SAS, RAID 1
 Other Hardware: None

Software

Operating System: Red Hat Enterprise Linux Server release 6.2, (Santiago)
 Kernel 2.6.32-220.el6.x86_64
 Compiler: C/C++: Version 12.1.2.273 of Intel C++ Studio XE for Linux
 Auto Parallel: No
 File System: ext4
 System State: Run level 3 (multi-user)
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V9.01
 HP Array Configuration Utility, CLI version



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECint_rate2006 = 176

ProLiant BL460c Gen8
(1.80 GHz, Intel Xeon E5-2603)

SPECint_rate_base2006 = 169

CPU2006 license: 3

Test date: Apr-2012

Test sponsor: Hewlett-Packard Company

Hardware Availability: Jun-2012

Tested by: Hewlett-Packard Company

Software Availability: Mar-2012

Results Table

Benchmark	Base						Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	8	643	122	646	121	644	121	8	531	147	532	147	531	147
401.bzip2	8	893	86.5	894	86.4	894	86.3	8	852	90.6	852	90.6	853	90.5
403.gcc	8	457	141	459	140	457	141	8	457	141	459	140	457	141
429.mcf	8	249	293	249	293	249	293	8	249	293	249	293	249	293
445.gobmk	8	791	106	791	106	791	106	8	775	108	776	108	775	108
456.hammer	8	361	207	361	207	362	206	8	332	225	332	225	332	225
458.sjeng	8	842	115	841	115	841	115	8	814	119	814	119	814	119
462.libquantum	8	158	1050	158	1050	158	1050	8	158	1050	158	1050	158	1050
464.h264ref	8	814	218	817	217	806	220	8	789	224	789	224	780	227
471.omnetpp	8	466	107	465	108	465	107	8	441	113	441	113	440	114
473.astar	8	573	98.0	570	98.6	570	98.5	8	573	98.0	570	98.6	570	98.5
483.xalancbmk	8	269	205	270	205	269	205	8	269	205	270	205	269	205

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
Transparent Huge Pages enabled with:
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
Filesystem page cache cleared with:
echo 1 > /proc/sys/vm/drop_caches
runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>
Drive Write Cache set to Enabled in HP Array Configuration Utility, CLI version
Accelerator Ratio for Reads/Writes set to = 100% Read / 0% Write
in HP Array Configuration Utility, CLI version
```

Platform Notes

```
BIOS Configuration:
HP Power Profile set to Custom
Energy/Performance Bias is set to Maximum Performance
Thermal Configuration set to Maximum Cooling
Collaborative Power Control set to Disabled
Processor Power and Utilization Monitoring set to Disabled
Sysinfo program /cpu2006/config/sysinfo.rev6800
$Rev: 6800 $ $Date:: 2011-10-11 #$ 6f2ebdff5032aaa42e583f96b07f99d3
Continued on next page
```



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECint_rate2006 = 176

ProLiant BL460c Gen8
(1.80 GHz, Intel Xeon E5-2603)

SPECint_rate_base2006 = 169

CPU2006 license: 3
Test sponsor: Hewlett-Packard Company
Tested by: Hewlett-Packard Company

Test date: Apr-2012
Hardware Availability: Jun-2012
Software Availability: Mar-2012

Platform Notes (Continued)

running on rh62 Tue Apr 12 15:31:25 2012

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see: <http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-2603 0 @ 1.80GHz
 2 "physical id"s (chips)
 8 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores : 4
  siblings  : 4
  physical 0: cores 0 1 2 3
  physical 1: cores 0 1 2 3
 cache size : 10240 KB
```

```
From /proc/meminfo
MemTotal:      132120004 kB
HugePages_Total:       0
Hugepagesize:       2048 kB
```

```
/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 6.2 (Santiago)
```

```
From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server
```

```
uname -a:
Linux rh62 2.6.32-220.el6.x86_64 #1 SMP Wed Nov 9 08:03:13 EST 2011 x86_64
x86_64 x86_64 GNU/Linux
```

run-level 3 Apr 12 15:17

```
SPEC is set to: /cpu2006
Filesystem      Type      Size  Used Avail Use% Mounted on
/dev/mapper/vg_rh62-lv_root
                ext4      50G   17G   30G   37% /
```

```
Additional information from dmidecode:
BIOS HP I31 02/13/2012
Memory:
16x Not Specified Not Specified 8 GB 1600 MHz 2 rank
```

(End of data from sysinfo program)



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECint_rate2006 = 176

ProLiant BL460c Gen8
(1.80 GHz, Intel Xeon E5-2603)

SPECint_rate_base2006 = 169

CPU2006 license: 3

Test date: Apr-2012

Test sponsor: Hewlett-Packard Company

Hardware Availability: Jun-2012

Tested by: Hewlett-Packard Company

Software Availability: Mar-2012

General Notes

Environment variables set by runspec before the start of the run:

KMP_AFFINITY = "granularity=fine,compact,1,0"

LD_LIBRARY_PATH = "/cpu2006/libs2/32:/cpu2006/libs2/64"

Binaries compiled on a system with 2x Xeon E5-2667 CPU + 256GB
memory using SLES11 SP2,RC3

Base Compiler Invocation

C benchmarks:

icc -m32

C++ benchmarks:

icpc -m32

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32

462.libquantum: -DSPEC_CPU_LINUX

483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3

-Wl,-z,muldefs -L/spec/libs2/32 -lsmartheap

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m32

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/

Page 4



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECint_rate2006 = 176

ProLiant BL460c Gen8
(1.80 GHz, Intel Xeon E5-2603)

SPECint_rate_base2006 = 169

CPU2006 license: 3

Test date: Apr-2012

Test sponsor: Hewlett-Packard Company

Hardware Availability: Jun-2012

Tested by: Hewlett-Packard Company

Software Availability: Mar-2012

Peak Compiler Invocation (Continued)

400.perlbench: `icc -m64`

401.bzip2: `icc -m64`

456.hmmer: `icc -m64`

458.sjeng: `icc -m64`

C++ benchmarks:

`icpc -m32`

Peak Portability Flags

400.perlbench: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64`

401.bzip2: `-DSPEC_CPU_LP64`

456.hmmer: `-DSPEC_CPU_LP64`

458.sjeng: `-DSPEC_CPU_LP64`

462.libquantum: `-DSPEC_CPU_LINUX`

483.xalancbmk: `-DSPEC_CPU_LINUX`

Peak Optimization Flags

C benchmarks:

400.perlbench: `-xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-auto-ilp32`

401.bzip2: `-xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-opt-prefetch -auto-ilp32 -ansi-alias`

403.gcc: `basepeak = yes`

429.mcf: `basepeak = yes`

445.gobmk: `-xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)
-ansi-alias -opt-mem-layout-trans=3`

456.hmmer: `-xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32`

458.sjeng: `-xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll4 -auto-ilp32`

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECint_rate2006 = 176

ProLiant BL460c Gen8
(1.80 GHz, Intel Xeon E5-2603)

SPECint_rate_base2006 = 169

CPU2006 license: 3

Test date: Apr-2012

Test sponsor: Hewlett-Packard Company

Hardware Availability: Jun-2012

Tested by: Hewlett-Packard Company

Software Availability: Mar-2012

Peak Optimization Flags (Continued)

462.libquantum: basepeak = yes

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs
-L/spec/libs2/32 -lsmarheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-A.20120425.html>

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20120425.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-A.20120425.xml>

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20120425.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 05:18:29 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 9 May 2012.