



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

**SPECint®2006 = 59.0**

ASUS ESC4000 G2 (Z9PG-D16) Server System  
(Intel Xeon E5-2690)

**SPECint\_base2006 = 54.8**

CPU2006 license: 9016


Test date: Jan-2013

Test sponsor: ASUSTeK Computer Inc.

Hardware Availability: Mar-2012

Tested by: ASUSTeK Computer Inc.

Software Availability: Dec-2011

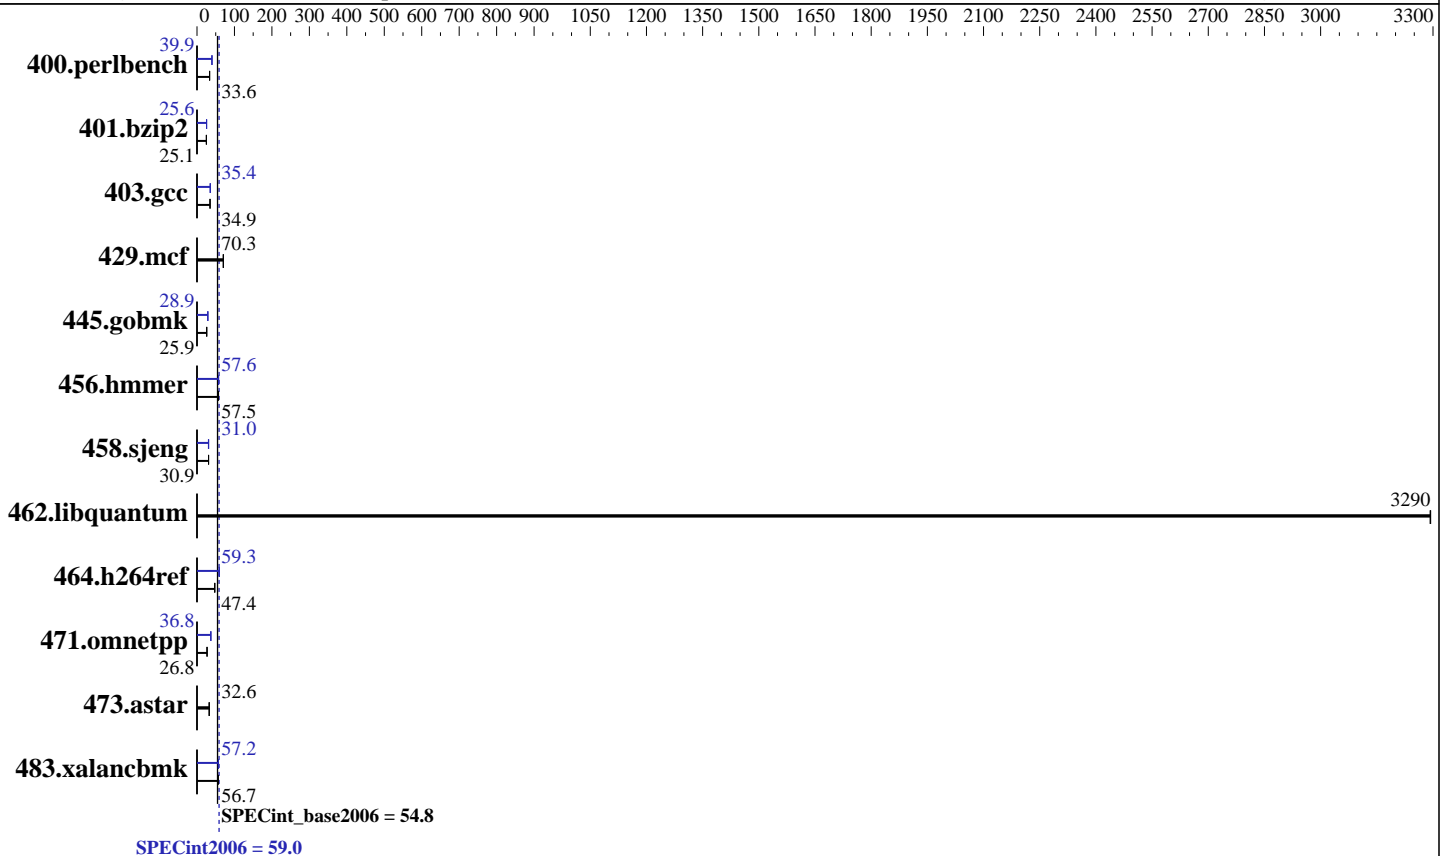

### Hardware

CPU Name: Intel Xeon E5-2690  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.80 GHz  
 CPU MHz: 2900  
 FPU: Integrated  
 CPU(s) enabled: 16 cores, 2 chips, 8 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 20 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 128 GB (16 x 8 GB 2Rx4 PC3-12800R-11, ECC)  
 Disk Subsystem: HITACHI HDP725050GLA380 1 x 500 GB SATA, 7200 RPM  
 Other Hardware: None

### Software

Operating System: Red Hat Enterprise Linux Server release 6.2 (Santiago)  
 2.6.32-220.el6.x86\_64  
 Compiler: C/C++: Version 12.1.0.225 of Intel C++ Studio XE for Linux;  
 Auto Parallel: Yes  
 File System: ext4  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32/64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V9.01



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS ESC4000 G2 (Z9PG-D16) Server System  
(Intel Xeon E5-2690)

SPECint2006 = **59.0**

SPECint\_base2006 = **54.8**

CPU2006 license: 9016

Test sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test date: Jan-2013

Hardware Availability: Mar-2012

Software Availability: Dec-2011

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	290	33.7	291	33.6	<b>290</b>	<b>33.6</b>	244	40.1	<b>245</b>	<b>39.9</b>	245	39.9
401.bzip2	<b>385</b>	<b>25.1</b>	385	25.1	385	25.1	<b>377</b>	<b>25.6</b>	377	25.6	377	25.6
403.gcc	231	34.9	<b>231</b>	<b>34.9</b>	232	34.8	227	35.4	227	35.4	<b>227</b>	<b>35.4</b>
429.mcf	129	70.6	<b>130</b>	<b>70.3</b>	130	70.1	129	70.6	<b>130</b>	<b>70.3</b>	130	70.1
445.gobmk	<b>405</b>	<b>25.9</b>	405	25.9	405	25.9	363	28.9	<b>363</b>	<b>28.9</b>	363	28.9
456.hammer	162	57.5	163	57.2	<b>162</b>	<b>57.5</b>	<b>162</b>	<b>57.6</b>	162	57.6	162	57.6
458.sjeng	392	30.9	<b>392</b>	<b>30.9</b>	392	30.9	390	31.0	397	30.5	<b>390</b>	<b>31.0</b>
462.libquantum	6.29	3290	<b>6.29</b>	<b>3290</b>	6.29	3290	6.29	3290	<b>6.29</b>	<b>3290</b>	6.29	3290
464.h264ref	<b>466</b>	<b>47.4</b>	469	47.2	466	47.5	372	59.4	<b>373</b>	<b>59.3</b>	374	59.2
471.omnetpp	233	26.8	232	26.9	<b>233</b>	<b>26.8</b>	<b>170</b>	<b>36.8</b>	170	36.8	168	37.2
473.astar	215	32.7	<b>215</b>	<b>32.6</b>	215	32.6	215	32.7	<b>215</b>	<b>32.6</b>	215	32.6
483.xalancbmk	122	56.4	<b>122</b>	<b>56.7</b>	122	56.8	<b>121</b>	<b>57.2</b>	120	57.5	121	56.9

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

Sysinfo program /cpu2006/config/sysinfo.rev6800  
\$Rev: 6800 \$ \$Date:: 2011-10-11 # \$ 6f2ebdff5032aaa42e583f96b07f99d3  
running on localhost Mon Jan 28 17:00:08 2013

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-2690 0 @ 2.90GHz
2 "physical id"s (chips)
32 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
cpu cores : 8
siblings : 16
physical 0: cores 0 1 2 3 4 5 6 7
physical 1: cores 0 1 2 3 4 5 6 7
cache size : 20480 KB
```

```
From /proc/meminfo
MemTotal: 132112580 kB
```

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**ASUSTeK Computer Inc.**

**SPECint2006 = 59.0**

ASUS ESC4000 G2 (Z9PG-D16) Server System  
(Intel Xeon E5-2690)

**SPECint\_base2006 = 54.8**

**CPU2006 license:** 9016

**Test date:** Jan-2013

**Test sponsor:** ASUSTeK Computer Inc.

**Hardware Availability:** Mar-2012

**Tested by:** ASUSTeK Computer Inc.

**Software Availability:** Dec-2011

## Platform Notes (Continued)

HugePages\_Total: 0  
Hugepagesize: 2048 kB

```
/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 6.2 (Santiago)
```

```
From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server
```

```
uname -a:
Linux localhost 2.6.32-220.el6.x86_64 #1 SMP Wed Nov 9 08:03:13 EST 2011
x86_64 x86_64 x86_64 GNU/Linux
```

run-level 3 Jan 28 16:59

```
SPEC is set to: /cpu2006
Filesystem      Type      Size  Used Avail Use% Mounted on
/dev/sda1       ext4      459G   75G  362G  18% /
```

Additional information from dmidecode:

(End of data from sysinfo program)

## General Notes

Environment variables set by runspec before the start of the run:

```
KMP_AFFINITY = "granularity=fine,scatter"
LD_LIBRARY_PATH = "/cpu2006/libs/32:/cpu2006/libs/64"
OMP_NUM_THREADS = "16"
```

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RHEL5.5

Transparent Huge Pages enabled with:  
echo always > /sys/kernel/mm/redhat\_transparent\_hugepage/enabled

## Base Compiler Invocation

C benchmarks:  
icc -m64

C++ benchmarks:  
icpc -m64



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**ASUSTeK Computer Inc.**

**SPECint2006 = 59.0**

ASUS ESC4000 G2 (Z9PG-D16) Server System  
(Intel Xeon E5-2690)

**SPECint\_base2006 = 54.8**

**CPU2006 license:** 9016

**Test date:** Jan-2013

**Test sponsor:** ASUSTeK Computer Inc.

**Hardware Availability:** Mar-2012

**Tested by:** ASUSTeK Computer Inc.

**Software Availability:** Dec-2011

## Base Portability Flags

```

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
471.omnetpp: -DSPEC_CPU_LP64
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX

```

## Base Optimization Flags

C benchmarks:

`-xAVX -ipo -O3 -no-prec-div -parallel -opt-prefetch -auto-p32`

C++ benchmarks:

`-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -Wl,-z,muldefs  
-L/smartheap -lsmartheap64`

## Base Other Flags

C benchmarks:

`403.gcc: -Dalloca=_alloca`

## Peak Compiler Invocation

C benchmarks (except as noted below):

`icc -m64`

`400.perlbench: icc -m32`

`445.gobmk: icc -m32`

`464.h264ref: icc -m32`

C++ benchmarks (except as noted below):

`icpc -m32`

`473.astar: icpc -m64`



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**ASUSTeK Computer Inc.**

**SPECint2006 = 59.0**

ASUS ESC4000 G2 (Z9PG-D16) Server System  
(Intel Xeon E5-2690)

**SPECint\_base2006 = 54.8**

**CPU2006 license:** 9016

**Test date:** Jan-2013

**Test sponsor:** ASUSTeK Computer Inc.

**Hardware Availability:** Mar-2012

**Tested by:** ASUSTeK Computer Inc.

**Software Availability:** Dec-2011

## Peak Portability Flags

```

400.perlbench: -DSPEC_CPU_LINUX_IA32
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

```

## Peak Optimization Flags

C benchmarks:

```

400.perlbench: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
               -no-prec-div(pass 2) -prof-use(pass 2) -opt-prefetch
               -ansi-alias

401.bzip2: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
            -no-prec-div -prof-use(pass 2) -auto-ilp32 -opt-prefetch
            -ansi-alias

403.gcc: -xAVX -ipo -O3 -no-prec-div -inline-calloc
          -opt-malloc-options=3 -auto-ilp32

429.mcf: basepeak = yes

445.gobmk: -xAVX(pass 2) -prof-gen(pass 1) -prof-use(pass 2)
            -ansi-alias

456.hmmer: -xAVX -ipo -O3 -no-prec-div -unroll2 -auto-ilp32
            -ansi-alias

458.sjeng: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
            -no-prec-div(pass 2) -prof-use(pass 2) -unroll4

462.libquantum: basepeak = yes

464.h264ref: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
              -no-prec-div(pass 2) -prof-use(pass 2) -unroll2
              -ansi-alias

```

C++ benchmarks:

```

471.omnetpp: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
              -no-prec-div(pass 2) -prof-use(pass 2)
              -opt-ra-region-strategy=block -ansi-alias
              -Wl,-z,muldefs -L/smartheap -lsmartheap

```

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**ASUSTeK Computer Inc.**

**SPECint2006 = 59.0**

ASUS ESC4000 G2 (Z9PG-D16) Server System  
(Intel Xeon E5-2690)

**SPECint\_base2006 = 54.8**

**CPU2006 license:** 9016

**Test date:** Jan-2013

**Test sponsor:** ASUSTeK Computer Inc.

**Hardware Availability:** Mar-2012

**Tested by:** ASUSTeK Computer Inc.

**Software Availability:** Dec-2011

## Peak Optimization Flags (Continued)

473.astar: basepeak = yes

483.xalancbmk: -xAVX -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias  
-Wl,-z,muldefs -L/smartheap -lsmartheap

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.html>

<http://www.spec.org/cpu2006/flags/ASUSTekPlatform.20120313.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.xml>

<http://www.spec.org/cpu2006/flags/ASUSTekPlatform.20120313.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Thu Jul 24 15:15:46 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 26 February 2013.