



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## IBM Corporation


IBM System x3750 M4  
(Intel Xeon E5-4640 v2, 2.20 GHz)

SPECint®\_rate2006 = 1390

SPECint\_rate\_base2006 = 1340

CPU2006 license: 11  
Test sponsor: IBM Corporation  
Tested by: IBM Corporation

Test date: May-2014  
Hardware Availability: Jun-2014  
Software Availability: Nov-2013

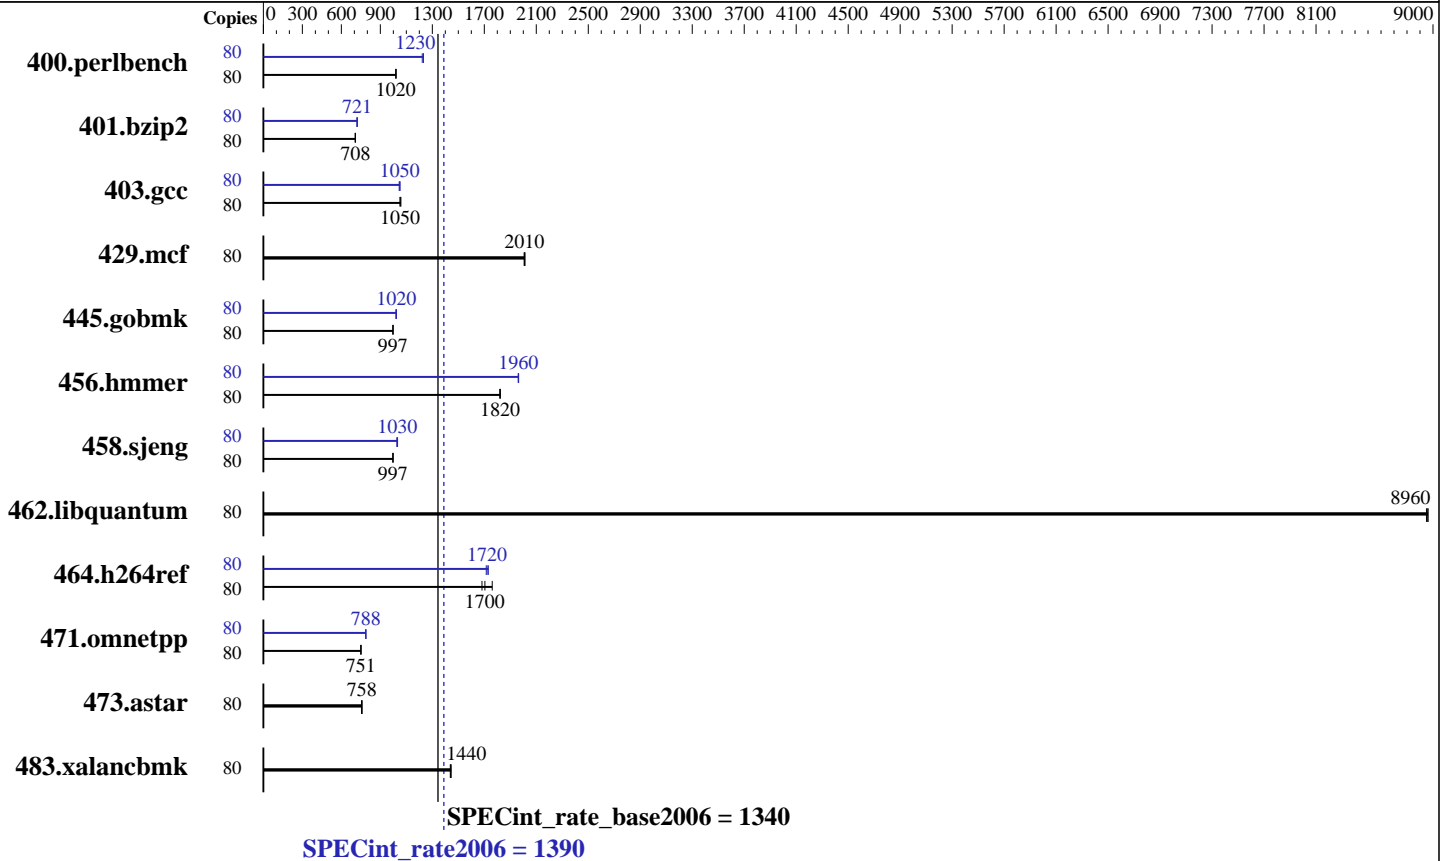

### Hardware

CPU Name: Intel Xeon E5-4640 v2  
 CPU Characteristics: Intel Turbo Boost Technology up to 2.70 GHz  
 CPU MHz: 2200  
 FPU: Integrated  
 CPU(s) enabled: 40 cores, 4 chips, 10 cores/chip, 2 threads/core  
 CPU(s) orderable: 4 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 20 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 512 GB (32 x 16 GB 2Rx4 PC3-14900R-13, ECC)  
 Disk Subsystem: 1 x 300 GB SAS, 10000 RPM  
 Other Hardware: None

### Software

Operating System: Red Hat Enterprise Linux Server release 6.5 (Santiago)  
 2.6.32-431.el6.x86\_64  
 Compiler: C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux  
 Auto Parallel: No  
 File System: ext4  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V10.0



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## IBM Corporation

IBM System x3750 M4  
(Intel Xeon E5-4640 v2, 2.20 GHz)

SPECint\_rate2006 = 1390

SPECint\_rate\_base2006 = 1340

CPU2006 license: 11  
Test sponsor: IBM Corporation  
Tested by: IBM Corporation

Test date: May-2014  
Hardware Availability: Jun-2014  
Software Availability: Nov-2013

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	80	<b>767</b>	<b>1020</b>	767	1020	765	1020	80	635	1230	<b>635</b>	<b>1230</b>	639	1220
401.bzip2	80	<b>1091</b>	<b>708</b>	1093	706	1090	709	80	1072	720	1068	723	<b>1070</b>	<b>721</b>
403.gcc	80	609	1060	<b>612</b>	<b>1050</b>	612	1050	80	612	1050	616	1050	<b>614</b>	<b>1050</b>
429.mcf	80	362	2010	<b>363</b>	<b>2010</b>	364	2010	80	362	2010	<b>363</b>	<b>2010</b>	364	2010
445.gobmk	80	<b>841</b>	<b>997</b>	842	997	841	997	80	823	1020	819	1020	<b>820</b>	<b>1020</b>
456.hammer	80	<b>410</b>	<b>1820</b>	410	1820	409	1820	80	381	1960	<b>380</b>	<b>1960</b>	380	1960
458.sjeng	80	970	998	971	997	<b>971</b>	<b>997</b>	80	943	1030	<b>939</b>	<b>1030</b>	938	1030
462.libquantum	80	185	8950	<b>185</b>	<b>8960</b>	185	8960	80	185	8950	<b>185</b>	<b>8960</b>	185	8960
464.h264ref	80	1052	1680	1005	1760	<b>1039</b>	<b>1700</b>	80	1023	1730	1032	1710	<b>1028</b>	<b>1720</b>
471.omnetpp	80	<b>666</b>	<b>751</b>	666	751	666	750	80	<b>634</b>	<b>788</b>	634	789	635	788
473.astar	80	744	755	740	759	<b>741</b>	<b>758</b>	80	744	755	740	759	<b>741</b>	<b>758</b>
483.xalancbmk	80	<b>383</b>	<b>1440</b>	382	1440	384	1440	80	<b>383</b>	<b>1440</b>	382	1440	384	1440

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

Operating Mode set to Maximum Performance in BIOS  
Sysinfo program /cpu2006.1.2\_14.0\_aug2013/config/sysinfo.rev6818  
\$Rev: 6818 \$ \$Date:: 2012-07-17 #\$ e86d102572650a6e4d596a3cee98f191  
running on Larry-KongIVB Tue May 27 16:09:38 2014

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo  
model name : Intel(R) Xeon(R) CPU E5-4640 v2 @ 2.20GHz  
4 "physical id"s (chips)  
80 "processors"  
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)  
cpu cores : 10

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## IBM Corporation

IBM System x3750 M4  
(Intel Xeon E5-4640 v2, 2.20 GHz)

SPECint\_rate2006 = 1390

SPECint\_rate\_base2006 = 1340

CPU2006 license: 11  
Test sponsor: IBM Corporation  
Tested by: IBM Corporation

Test date: May-2014  
Hardware Availability: Jun-2014  
Software Availability: Nov-2013

### Platform Notes (Continued)

```
siblings : 20
physical 0: cores 0 1 2 3 4 8 9 10 11 12
physical 1: cores 0 1 2 3 4 8 9 10 11 12
physical 2: cores 0 1 2 3 4 8 9 10 11 12
physical 3: cores 0 1 2 3 4 8 9 10 11 12
cache size : 20480 KB
```

```
From /proc/meminfo
MemTotal: 529083048 kB
HugePages_Total: 0
Hugepagesize: 2048 kB
```

```
/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 6.5 (Santiago)
```

```
From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server
```

```
uname -a:
Linux Larry-KongIVB 2.6.32-431.el6.x86_64 #1 SMP Sun Nov 10 22:19:54 EST 2013
x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 May 27 15:53
```

```
SPEC is set to: /cpu2006.1.2_14.0_aug2013
Filesystem Type Size Used Avail Use% Mounted on
/dev/mapper/vg_larrykongivb-lv_root ext4 264G 100G 151G 40% /
```

```
Additional information from dmidecode:
BIOS IBM -[KOE141AUS-1.50]- 05/03/2014
Memory:
31x Micron 36JSF2G72PZ-1G9E1 16 GB 1867 MHz 2 rank
16x Not Specified Not Specified
1x Samsung M393B2G70QH0-CMA 16 GB 1867 MHz 2 rank
```

(End of data from sysinfo program)

### General Notes

Environment variables set by runspec before the start of the run:  
LD\_LIBRARY\_PATH = "/cpu2006.1.2\_14.0\_aug2013/libs/32:/cpu2006.1.2\_14.0\_aug2013/libs/64:/cpu2006.1.2\_14.0\_aug2013/sh"

```
Binaries compiled on a system with 1x Core i7-860 CPU + 8GB
memory using RedHat EL 6.4
Transparent Huge Pages enabled with:
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
Filesystem page cache cleared with:
echo 1> /proc/sys/vm/drop_caches
runspec command invoked through numactl i.e.:
```

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**IBM Corporation**

IBM System x3750 M4  
(Intel Xeon E5-4640 v2, 2.20 GHz)

**SPECint\_rate2006 = 1390**

**SPECint\_rate\_base2006 = 1340**

**CPU2006 license:** 11  
**Test sponsor:** IBM Corporation  
**Tested by:** IBM Corporation

**Test date:** May-2014  
**Hardware Availability:** Jun-2014  
**Software Availability:** Nov-2013

## General Notes (Continued)

numactl --interleave=all runspec <etc>

## Base Compiler Invocation

C benchmarks:  
icc -m32

C++ benchmarks:  
icpc -m32

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32  
462.libquantum: -DSPEC\_CPU\_LINUX  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3

C++ benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3  
-Wl,-z,muldefs -L/sh -lsmartheap

## Base Other Flags

C benchmarks:  
403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):  
icc -m32

400.perlbench: icc -m64

401.bzip2: icc -m64

456.hmmer: icc -m64

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**IBM Corporation**

IBM System x3750 M4  
(Intel Xeon E5-4640 v2, 2.20 GHz)

**SPECint\_rate2006 = 1390**

**SPECint\_rate\_base2006 = 1340**

**CPU2006 license:** 11  
**Test sponsor:** IBM Corporation  
**Tested by:** IBM Corporation

**Test date:** May-2014  
**Hardware Availability:** Jun-2014  
**Software Availability:** Nov-2013

## Peak Compiler Invocation (Continued)

458.sjeng: icc -m64

C++ benchmarks:  
icpc -m32

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64  
401.bzip2: -DSPEC\_CPU\_LP64  
456.hmmer: -DSPEC\_CPU\_LP64  
458.sjeng: -DSPEC\_CPU\_LP64  
462.libquantum: -DSPEC\_CPU\_LINUX  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-auto-ilp32

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-opt-prefetch -auto-ilp32 -ansi-alias

403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div

429.mcf: basepeak = yes

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)  
-ansi-alias -opt-mem-layout-trans=3

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll4 -auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll2 -ansi-alias

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**IBM Corporation**

IBM System x3750 M4  
(Intel Xeon E5-4640 v2, 2.20 GHz)

**SPECint\_rate2006 = 1390**

**SPECint\_rate\_base2006 = 1340**

**CPU2006 license:** 11  
**Test sponsor:** IBM Corporation  
**Tested by:** IBM Corporation

**Test date:** May-2014  
**Hardware Availability:** Jun-2014  
**Software Availability:** Nov-2013

## Peak Optimization Flags (Continued)

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs  
-L/sh -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>  
<http://www.spec.org/cpu2006/flags/IBM-Platform-Flags-V1.2-IVB-A.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>  
<http://www.spec.org/cpu2006/flags/IBM-Platform-Flags-V1.2-IVB-A.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Thu Jul 24 23:44:36 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 18 June 2014.