



SPEC[®] CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R730 (Intel Xeon E5-2650 v3, 2.30 GHz)

SPECfp[®]_rate2006 = 684

SPECfp_rate_base2006 = 666

CPU2006 license: 55


Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: Sep-2014

Hardware Availability: Sep-2014

Software Availability: Nov-2013

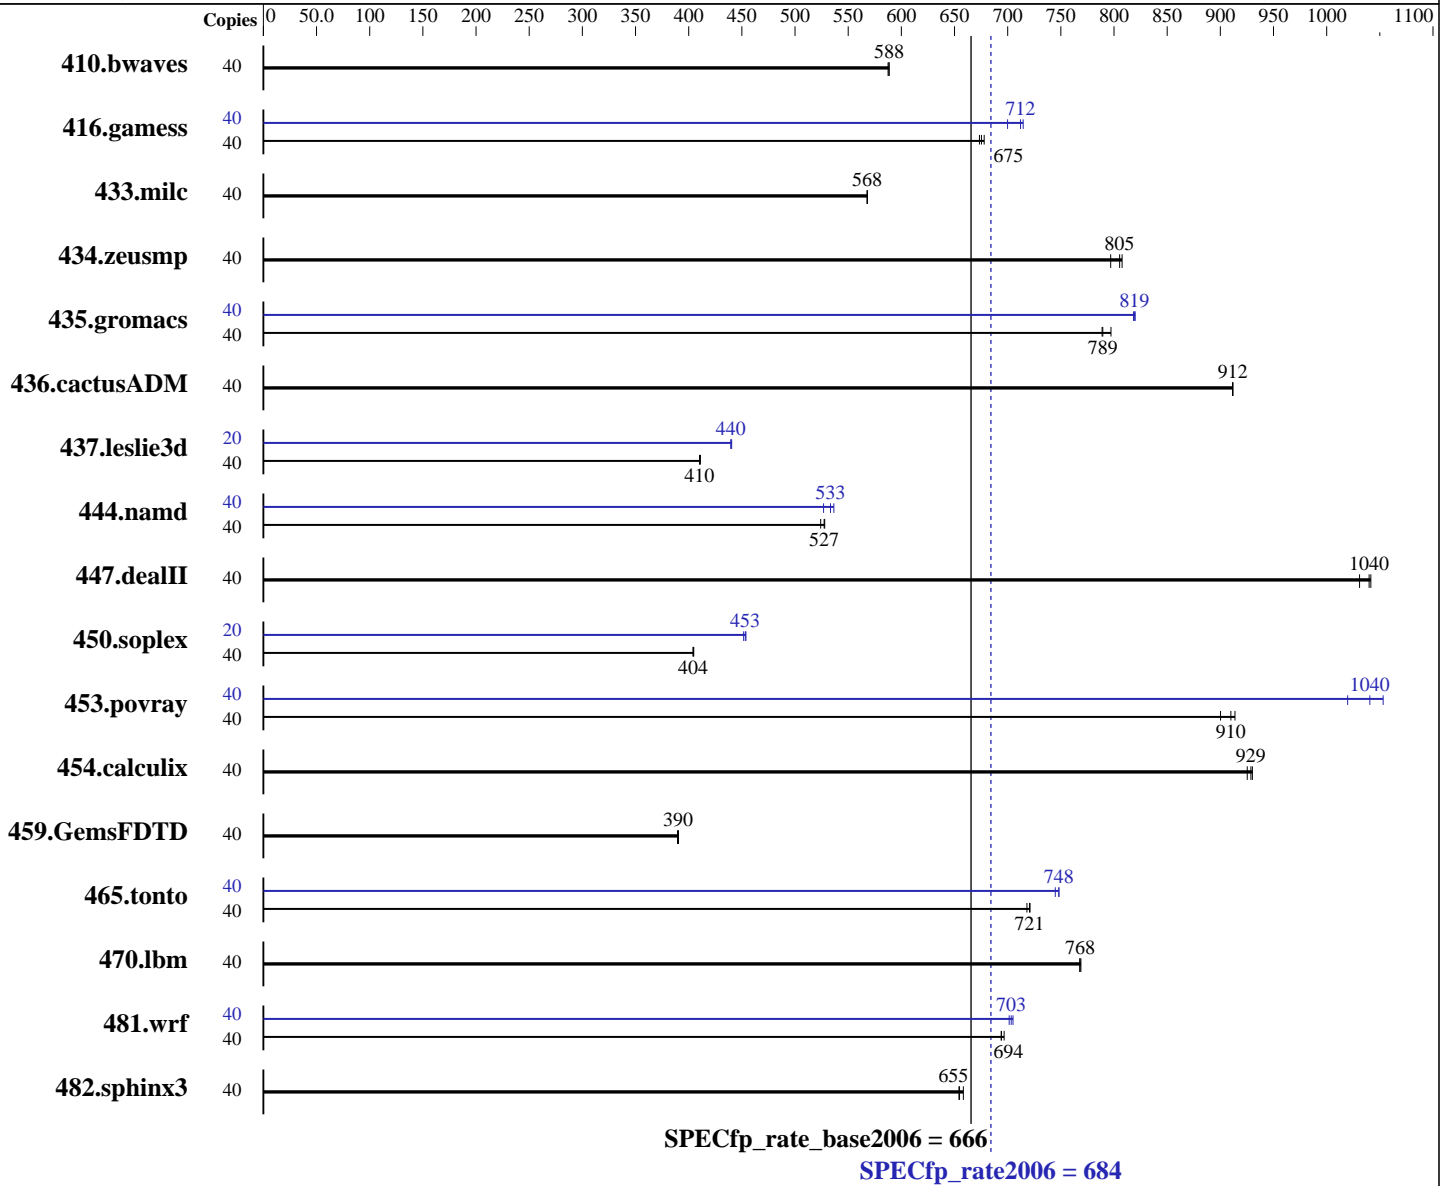

Hardware

CPU Name: Intel Xeon E5-2650 v3
 CPU Characteristics: Intel Turbo Boost Technology up to 3.00 GHz
 CPU MHz: 2300
 FPU: Integrated
 CPU(s) enabled: 20 cores, 2 chips, 10 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: Red Hat Enterprise Linux Server release 6.5 (Santiago)
 2.6.32-431.el6.x86_64
 Compiler: C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux;
 Fortran: Version 14.0.0.080 of Intel Fortran Studio XE for Linux
 Auto Parallel: No
 File System: ext4

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R730 (Intel Xeon E5-2650 v3,
2.30 GHz)

SPECfp_rate2006 = **684**

SPECfp_rate_base2006 = **666**

CPU2006 license: 55

Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: Sep-2014

Hardware Availability: Sep-2014

Software Availability: Nov-2013

L3 Cache: 25 MB I+D on chip per chip
Other Cache: None
Memory: 256 GB (16 x 16 GB 2Rx4 PC4-2133P-R)
Disk Subsystem: 1 x 300 GB 15000 RPM SAS
Other Hardware: None

System State: Run level 3 (multi-user)
Base Pointers: 32/64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio		
410.bwaves	40	<u>924</u>	<u>588</u>	924	588	925	588	40	<u>924</u>	<u>588</u>	924	588	925	588		
416.gamess	40	1155	678	1163	673	<u>1160</u>	<u>675</u>	40	1119	700	1096	715	<u>1100</u>	<u>712</u>		
433.milc	40	647	568	<u>646</u>	<u>568</u>	646	568	40	647	568	<u>646</u>	<u>568</u>	646	568		
434.zeusmp	40	<u>452</u>	<u>805</u>	451	808	457	797	40	<u>452</u>	<u>805</u>	451	808	457	797		
435.gromacs	40	358	797	<u>362</u>	<u>789</u>	362	789	40	349	818	<u>349</u>	<u>819</u>	348	820		
436.cactusADM	40	<u>524</u>	<u>912</u>	524	912	524	912	40	<u>524</u>	<u>912</u>	524	912	524	912		
437.leslie3d	40	<u>916</u>	<u>410</u>	917	410	915	411	20	427	440	428	440	<u>427</u>	<u>440</u>		
444.namd	40	608	528	612	524	<u>608</u>	<u>527</u>	40	609	527	598	537	<u>601</u>	<u>533</u>		
447.dealII	40	<u>440</u>	<u>1040</u>	444	1030	439	1040	40	<u>440</u>	<u>1040</u>	444	1030	439	1040		
450.soplex	40	<u>825</u>	<u>404</u>	825	404	824	405	20	369	452	<u>368</u>	<u>453</u>	368	454		
453.povray	40	<u>234</u>	<u>910</u>	233	914	236	900	40	<u>204</u>	<u>1040</u>	202	1050	209	1020		
454.calculix	40	355	930	<u>355</u>	<u>929</u>	357	925	40	355	930	<u>355</u>	<u>929</u>	357	925		
459.GemsFDTD	40	<u>1088</u>	<u>390</u>	1090	389	1087	390	40	<u>1088</u>	<u>390</u>	1090	389	1087	390		
465.tonto	40	546	721	<u>546</u>	<u>721</u>	548	718	40	<u>526</u>	<u>748</u>	526	748	528	745		
470.lbm	40	716	768	715	769	<u>716</u>	<u>768</u>	40	716	768	715	769	<u>716</u>	<u>768</u>		
481.wrf	40	641	697	<u>644</u>	<u>694</u>	644	694	40	634	705	637	701	<u>635</u>	<u>703</u>		
482.sphinx3	40	<u>1191</u>	<u>655</u>	1184	658	1192	654	40	<u>1191</u>	<u>655</u>	1184	658	1192	654		

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

BIOS settings:
Snoop Mode set to Cluster on Die
Virtualization Technology Disabled

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R730 (Intel Xeon E5-2650 v3, 2.30 GHz)

SPECfp_rate2006 = 684

SPECfp_rate_base2006 = 666

CPU2006 license: 55

Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: Sep-2014

Hardware Availability: Sep-2014

Software Availability: Nov-2013

Platform Notes (Continued)

```

Execute Disable disabled
System Profile set to Performance
Sysinfo program /root/cpu2006-1.2/config/sysinfo.rev6818
$Rev: 6818 $ $Date:: 2012-07-17 #$ e86d102572650a6e4d596a3cee98f191
running on localhost.localdomain Tue Sep  2 10:07:06 2014

```

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see: <http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```

From /proc/cpuinfo
model name      : Intel(R) Xeon(R) CPU E5-2650 v3 @ 2.30GHz
 2 "physical id"s (chips)
 40 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
  cpu cores    : 10
  siblings    : 20
  physical 0: cores 0 1 2 3 4 8 9 10 11 12
  physical 1: cores 0 1 2 3 4 8 9 10 11 12
cache size     : 12800 KB

```

```

From /proc/meminfo
MemTotal:      264568072 kB
HugePages_Total: 0
Hugepagesize:  2048 kB

```

```

/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 6.5 (Santiago)

```

```

From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server

```

```

uname -a:
Linux localhost.localdomain 2.6.32-431.el6.x86_64 #1 SMP Sun Nov 10 22:19:54 EST 2013 x86_64 x86_64 x86_64 GNU/Linux

```

run-level 5 Sep 2 10:04

```

SPEC is set to: /root/cpu2006-1.2
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda2       ext4  222G  14G  197G   7% /

```

Additional information from dmidecode:

BIOS Dell Inc. 1.0.4 08/28/2014

Memory:

```

2x 00AD00B300AD HMA42GR7MFR4N-TFTD 16 GB 2133 MHz 2 rank
9x 00AD063200AD HMA42GR7MFR4N-TFT1 16 GB 2133 MHz 2 rank
5x 00CE00B300CE M393A2G40DB0-CPB 16 GB 2133 MHz 2 rank

```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = 684

PowerEdge R730 (Intel Xeon E5-2650 v3,
2.30 GHz)

SPECfp_rate_base2006 = 666

CPU2006 license: 55

Test date: Sep-2014

Test sponsor: Dell Inc.

Hardware Availability: Sep-2014

Tested by: Dell Inc.

Software Availability: Nov-2013

Platform Notes (Continued)

8x Not Specified Not Specified

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:

```
LD_LIBRARY_PATH = "/root/cpu2006-1.2/libs/32:/root/cpu2006-1.2/libs/64:/root/cpu2006-1.2/sh"
```

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB
memory using RedHat EL 6.4

Transparent Huge Pages enabled with:

```
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
```

Filesystem page cache cleared with:

```
echo 1 > /proc/sys/vm/drop_caches
```

runspec command invoked through numactl i.e.:

```
numactl --interleave=all runspec <etc>
```

Base Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```

Base Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.deallI: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R730 (Intel Xeon E5-2650 v3,
2.30 GHz)

SPECfp_rate2006 = 684

SPECfp_rate_base2006 = 666

CPU2006 license: 55

Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: Sep-2014

Hardware Availability: Sep-2014

Software Availability: Nov-2013

Base Portability Flags (Continued)

459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

Fortran benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

Benchmarks using both Fortran and C:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

Peak Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks (except as noted below):

icpc -m64

450.soplex: icpc -m32

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R730 (Intel Xeon E5-2650 v3,
2.30 GHz)

SPECfp_rate2006 = 684

SPECfp_rate_base2006 = 666

CPU2006 license: 55

Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: Sep-2014

Hardware Availability: Sep-2014

Software Availability: Nov-2013

Peak Portability Flags (Continued)

```

433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

```

444.namd: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
         -O3(pass 2) -no-prec-div(pass 2)
         -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -fno-alias
         -auto-ilp32

```

447.dealII: basepeak = yes

```

450.soplex: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
           -O3(pass 2) -no-prec-div(pass 2)
           -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)
           -opt-malloc-options=3

```

```

453.povray: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
           -O3(pass 2) -no-prec-div(pass 2)
           -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -unroll4
           -ansi-alias

```

Fortran benchmarks:

410.bwaves: basepeak = yes

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R730 (Intel Xeon E5-2650 v3,
2.30 GHz)

SPECfp_rate2006 = 684

SPECfp_rate_base2006 = 666

CPU2006 license: 55

Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: Sep-2014

Hardware Availability: Sep-2014

Software Availability: Nov-2013

Peak Optimization Flags (Continued)

416.gamess: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

459.GemsFDTD: basepeak = yes

465.tonto: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4
-auto -inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2)
-opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)
-opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: -xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64-revC.html>
<http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revD.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64-revC.xml>
<http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revD.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Fri Oct 10 14:26:50 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 10 October 2014.