



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Lenovo Group Limited

Lenovo ThinkServer TD350 (Intel Xeon E5-2698 v3, 2.30 GHz)

SPECfp<sup>®</sup>\_rate2006 = 873

SPECfp\_rate\_base2006 = 847

CPU2006 license: 9017


Test sponsor: Lenovo Group Limited

Tested by: Lenovo Group Limited

Test date: Oct-2014

Hardware Availability: Sep-2014

Software Availability: Nov-2014

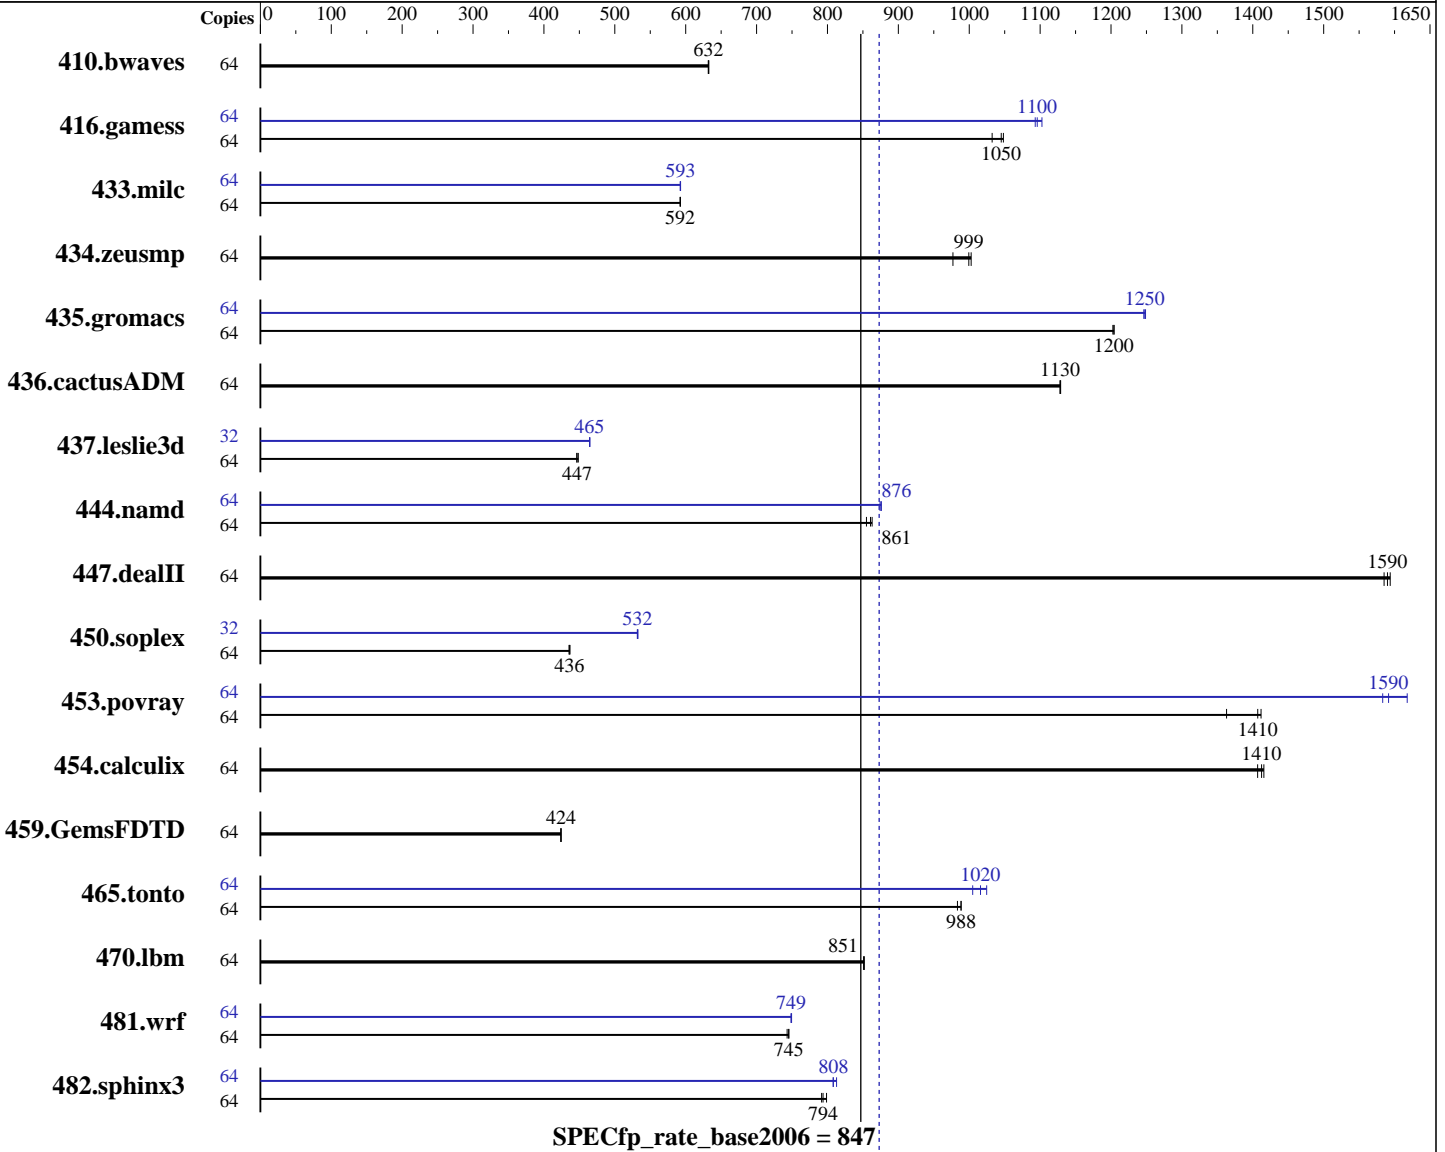

### Hardware

CPU Name: Intel Xeon E5-2698 v3  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.60 GHz  
 CPU MHz: 2300  
 FPU: Integrated  
 CPU(s) enabled: 32 cores, 2 chips, 16 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

### Software

Operating System: Red Hat Enterprise Linux Server release 6.5 (Santiago)  
 2.6.32-431.el6.x86\_64  
 Compiler: C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux;  
 Fortran: Version 14.0.0.080 of Intel Fortran Studio XE for Linux  
 Auto Parallel: No  
 File System: ext4

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Lenovo Group Limited

Lenovo ThinkServer TD350 (Intel Xeon E5-2698 v3, 2.30 GHz)

SPECfp\_rate2006 = **873**

SPECfp\_rate\_base2006 = **847**

CPU2006 license: 9017

Test sponsor: Lenovo Group Limited

Tested by: Lenovo Group Limited

Test date: Oct-2014

Hardware Availability: Sep-2014

Software Availability: Nov-2014

L3 Cache: 40 MB I+D on chip per chip  
Other Cache: None  
Memory: 256 GB (16 x 16 GB 2Rx4 PC4-2133P-R)  
Disk Subsystem: 1 x 800 GB SATA SSD  
Other Hardware: None

System State: Run level 3 (multi-user)  
Base Pointers: 32/64-bit  
Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	64	1377	632	1375	633	<b><u>1376</u></b>	<b><u>632</u></b>	64	1377	632	1375	633	<b><u>1376</u></b>	<b><u>632</u></b>
416.gamess	64	1196	1050	1214	1030	<b><u>1199</u></b>	<b><u>1050</u></b>	64	1146	1090	<b><u>1143</u></b>	<b><u>1100</u></b>	1137	1100
433.milc	64	992	592	992	592	<b><u>992</u></b>	<b><u>592</u></b>	64	992	592	<b><u>991</u></b>	<b><u>593</u></b>	991	593
434.zeusmp	64	581	1000	<b><u>583</u></b>	<b><u>999</u></b>	596	977	64	581	1000	<b><u>583</u></b>	<b><u>999</u></b>	596	977
435.gromacs	64	379	1200	380	1200	<b><u>379</u></b>	<b><u>1200</u></b>	64	367	1250	<b><u>366</u></b>	<b><u>1250</u></b>	366	1250
436.cactusADM	64	<b><u>678</u></b>	<b><u>1130</u></b>	677	1130	678	1130	64	<b><u>678</u></b>	<b><u>1130</u></b>	677	1130	678	1130
437.leslie3d	64	1341	448	<b><u>1346</u></b>	<b><u>447</u></b>	1348	446	32	647	465	<b><u>648</u></b>	<b><u>465</u></b>	648	464
444.namd	64	595	863	600	855	<b><u>596</u></b>	<b><u>861</u></b>	64	586	876	<b><u>586</u></b>	<b><u>876</u></b>	587	874
447.dealII	64	462	1590	459	1590	<b><u>460</u></b>	<b><u>1590</u></b>	64	462	1590	459	1590	<b><u>460</u></b>	<b><u>1590</u></b>
450.soplex	64	1222	437	1226	436	<b><u>1225</u></b>	<b><u>436</u></b>	32	502	532	501	533	<b><u>502</u></b>	<b><u>532</u></b>
453.povray	64	241	1410	250	1360	<b><u>242</u></b>	<b><u>1410</u></b>	64	<b><u>214</u></b>	<b><u>1590</u></b>	215	1580	210	1620
454.calculix	64	375	1410	<b><u>374</u></b>	<b><u>1410</u></b>	373	1420	64	375	1410	<b><u>374</u></b>	<b><u>1410</u></b>	373	1420
459.GemsFDTD	64	1601	424	<b><u>1601</u></b>	<b><u>424</u></b>	1602	424	64	1601	424	<b><u>1601</u></b>	<b><u>424</u></b>	1602	424
465.tonto	64	637	989	<b><u>637</u></b>	<b><u>988</u></b>	640	983	64	615	1020	627	1000	<b><u>620</u></b>	<b><u>1020</u></b>
470.lbm	64	1032	852	<b><u>1033</u></b>	<b><u>851</u></b>	1033	851	64	1032	852	<b><u>1033</u></b>	<b><u>851</u></b>	1033	851
481.wrf	64	<b><u>959</u></b>	<b><u>745</u></b>	959	746	962	743	64	955	749	<b><u>954</u></b>	<b><u>749</u></b>	954	749
482.sphinx3	64	1562	799	1576	792	<b><u>1571</u></b>	<b><u>794</u></b>	64	<b><u>1543</u></b>	<b><u>808</u></b>	1544	808	1535	813

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS configuration:  
Cluster On Die set to Enabled  
Early Snoop set to Disabled

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Lenovo Group Limited

SPECfp\_rate2006 = 873

Lenovo ThinkServer TD350 (Intel Xeon E5-2698 v3, 2.30 GHz)

SPECfp\_rate\_base2006 = 847

CPU2006 license: 9017

Test date: Oct-2014

Test sponsor: Lenovo Group Limited

Hardware Availability: Sep-2014

Tested by: Lenovo Group Limited

Software Availability: Nov-2014

### Platform Notes (Continued)

Performance Profile set to Custom  
 ClE Support set to Disabled  
 Core C3 set to Disabled  
 Core C6 set to Disabled  
 Thermal Profile set to Max Performance  
 Memory Power Savings set to Disabled  
 Sysinfo program /usr/cpu2006/config/sysinfo.rev6818  
 \$Rev: 6818 \$ \$Date:: 2012-07-17 #\$ e86d102572650a6e4d596a3cee98f191  
 running on TD350 Thu Oct 16 17:57:02 2014

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name      : Intel(R) Xeon(R) CPU E5-2698 v3 @ 2.30GHz
 2 "physical id"s (chips)
 64 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
  cpu cores     : 16
  siblings      : 32
  physical 0:   cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
  physical 1:   cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
cache size      : 20480 KB
```

```
From /proc/meminfo
MemTotal:      264409084 kB
HugePages_Total: 0
Hugepagesize:  2048 kB
```

```
/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 6.5 (Santiago)
```

```
From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server
```

```
uname -a:
Linux TD350 2.6.32-431.el6.x86_64 #1 SMP Sun Nov 10 22:19:54 EST 2013 x86_64
x86_64 x86_64 GNU/Linux
```

run-level 3 Oct 16 17:48

```
SPEC is set to: /usr/cpu2006
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda2       ext4  730G  11G  682G   2% /
```

Additional information from dmidecode:  
 BIOS LENOVO TB5TS110 10/06/2014

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Lenovo Group Limited

Lenovo ThinkServer TD350 (Intel Xeon E5-2698 v3, 2.30 GHz)

SPECfp\_rate2006 = 873

SPECfp\_rate\_base2006 = 847

CPU2006 license: 9017

Test sponsor: Lenovo Group Limited

Tested by: Lenovo Group Limited

Test date: Oct-2014

Hardware Availability: Sep-2014

Software Availability: Nov-2014

## Platform Notes (Continued)

Memory:

16x 16 GB

16x Samsung M393A2G40DB0-CPB 16 GB 2133 MHz 2 rank

(End of data from sysinfo program)

TD350 support 4 channels and 8 DIMMs per processor, total 8 channels and 16 DIMMs. All 16 DIMM slots installed with 16 GB DIMM for this run.

## General Notes

Environment variables set by runspec before the start of the run:

LD\_LIBRARY\_PATH = "/usr/cpu2006/libs/32:/usr/cpu2006/libs/64:/usr/cpu2006/sh"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RedHat EL 6.4

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/redhat\_transparent\_hugepage/enabled

Filesystem page cache cleared with:

echo 1> /proc/sys/vm/drop\_caches

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64

416.gamess: -DSPEC\_CPU\_LP64

433.milc: -DSPEC\_CPU\_LP64

434.zeusmp: -DSPEC\_CPU\_LP64

435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main

436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main

437.leslie3d: -DSPEC\_CPU\_LP64

444.namd: -DSPEC\_CPU\_LP64

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/

Page 4



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Lenovo Group Limited**

**SPECfp\_rate2006 = 873**

Lenovo ThinkServer TD350 (Intel Xeon E5-2698 v3, 2.30 GHz)

**SPECfp\_rate\_base2006 = 847**

**CPU2006 license:** 9017

**Test date:** Oct-2014

**Test sponsor:** Lenovo Group Limited

**Hardware Availability:** Sep-2014

**Tested by:** Lenovo Group Limited

**Software Availability:** Nov-2014

## Base Portability Flags (Continued)

```

447.deallI: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

## Base Optimization Flags

C benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

```

C++ benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

```

Fortran benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

```

Benchmarks using both Fortran and C:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

```

## Peak Compiler Invocation

C benchmarks (except as noted below):

```

icc -m64

```

```

482.sphinx3: icc -m32

```

C++ benchmarks (except as noted below):

```

icpc -m64

```

```

450.soplex: icpc -m32

```

Fortran benchmarks:

```

ifort -m64

```

Benchmarks using both Fortran and C:

```

icc -m64 ifort -m64

```



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Lenovo Group Limited

Lenovo ThinkServer TD350 (Intel Xeon E5-2698 v3, 2.30 GHz)

SPECfp\_rate2006 = 873

SPECfp\_rate\_base2006 = 847

CPU2006 license: 9017

Test sponsor: Lenovo Group Limited

Tested by: Lenovo Group Limited

Test date: Oct-2014

Hardware Availability: Sep-2014

Software Availability: Nov-2014

## Peak Portability Flags

```

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX

```

## Peak Optimization Flags

C benchmarks:

```

433.milc: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
         -O3(pass 2) -no-prec-div(pass 2)
         -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)
         -auto-ilp32

```

470.lbm: basepeak = yes

```

482.sphinx3: -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-mem-layout-trans=3
            -unroll2

```

C++ benchmarks:

```

444.namd: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
         -O3(pass 2) -no-prec-div(pass 2)
         -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -fno-alias
         -auto-ilp32

```

447.dealII: basepeak = yes

```

450.soplex: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
         -O3(pass 2) -no-prec-div(pass 2)
         -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)
         -opt-malloc-options=3

```

```

453.povray: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
         -O3(pass 2) -no-prec-div(pass 2)
         -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -unroll4
         -ansi-alias

```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Lenovo Group Limited

Lenovo ThinkServer TD350 (Intel Xeon E5-2698 v3, 2.30 GHz)

**SPECfp\_rate2006 = 873**

**SPECfp\_rate\_base2006 = 847**

**CPU2006 license:** 9017

**Test sponsor:** Lenovo Group Limited

**Tested by:** Lenovo Group Limited

**Test date:** Oct-2014

**Hardware Availability:** Sep-2014

**Software Availability:** Nov-2014

## Peak Optimization Flags (Continued)

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

459.GemsFDTD: basepeak = yes

465.tonto: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4  
-auto -inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2)  
-opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)  
-opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: -xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>

<http://www.spec.org/cpu2006/flags/Lenovo-Platform-Settings-V1.2-revA.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>

<http://www.spec.org/cpu2006/flags/Lenovo-Platform-Settings-V1.2-revA.xml>



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Lenovo Group Limited

Lenovo ThinkServer TD350 (Intel Xeon E5-2698 v3, 2.30 GHz)

SPECfp\_rate2006 = 873

SPECfp\_rate\_base2006 = 847

**CPU2006 license:** 9017

**Test sponsor:** Lenovo Group Limited

**Tested by:** Lenovo Group Limited

**Test date:** Oct-2014

**Hardware Availability:** Sep-2014

**Software Availability:** Nov-2014

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Tue Nov 18 16:30:14 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 18 November 2014.