



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Huawei

SPECfp®\_rate2006 = 539

Huawei RH2288A V2 (Intel Xeon E5-2650 v2)

SPECfp\_rate\_base2006 = 526

CPU2006 license: 3175


Test sponsor: Huawei

Tested by: Huawei

Test date: Aug-2014

Hardware Availability: Sep-2013

Software Availability: Nov-2013

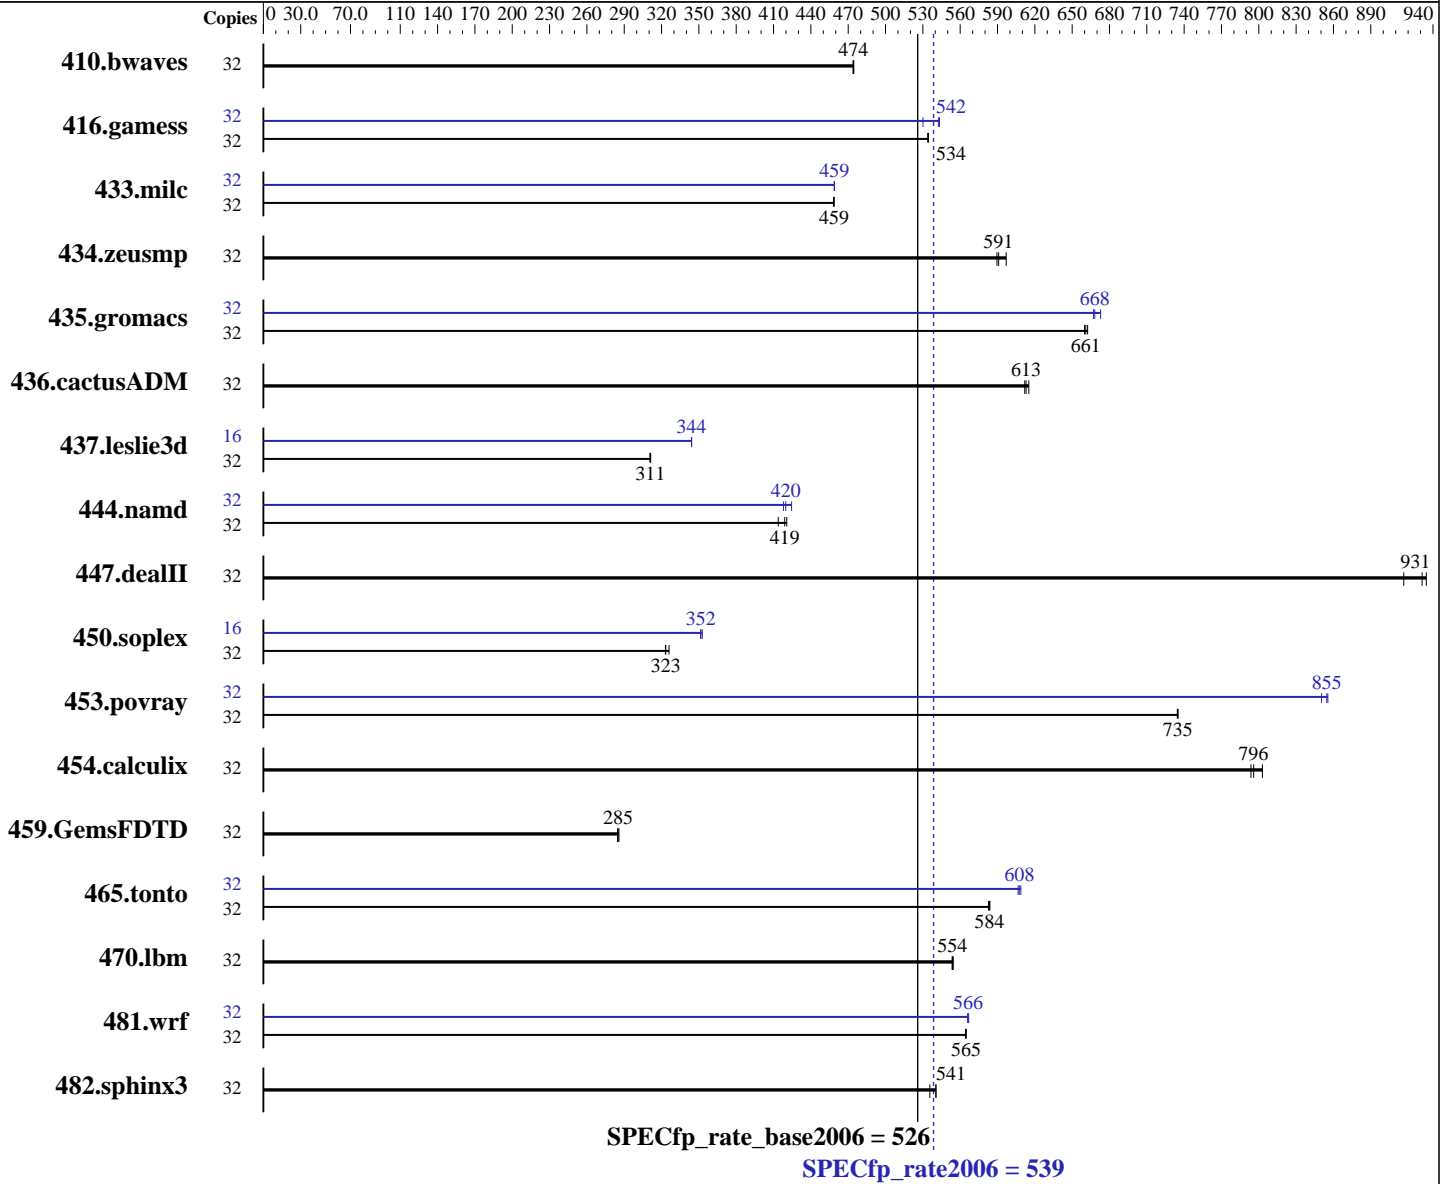

### Hardware

CPU Name: Intel Xeon E5-2650 v2  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.40 GHz  
 CPU MHz: 2600  
 FPU: Integrated  
 CPU(s) enabled: 16 cores, 2 chips, 8 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

### Software

Operating System: Red Hat Enterprise Linux Server release 6.5 (Santiago)  
 2.6.32-431.el6.x86\_64  
 Compiler: C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux;  
 Fortran: Version 14.0.0.080 of Intel Fortran Studio XE for Linux  
 Auto Parallel: No  
 File System: ext4

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Huawei

SPECfp\_rate2006 = **539**

Huawei RH2288A V2 (Intel Xeon E5-2650 v2)

SPECfp\_rate\_base2006 = **526**

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Aug-2014

Hardware Availability: Sep-2013

Software Availability: Nov-2013

L3 Cache: 20 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 128 GB (8 x 16 GB 2Rx4 PC3-14900R-11, ECC)  
 Disk Subsystem: 1 x 500 GB SATA, 7200 RPM  
 Other Hardware: None

System State: Run level 3 (multi-user)  
 Base Pointers: 32/64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	32	917	474	918	474	<b>917</b>	<b>474</b>	32	917	474	918	474	<b>917</b>	<b>474</b>
416.gamess	32	1172	534	<b>1173</b>	<b>534</b>	1173	534	32	1153	543	<b>1155</b>	<b>542</b>	1182	530
433.milc	32	641	459	<b>641</b>	<b>459</b>	641	458	32	<b>640</b>	<b>459</b>	640	459	640	459
434.zeusmp	32	<b>493</b>	<b>591</b>	488	597	494	590	32	<b>493</b>	<b>591</b>	488	597	494	590
435.gromacs	32	346	660	<b>346</b>	<b>661</b>	345	662	32	342	667	340	673	<b>342</b>	<b>668</b>
436.cactusADM	32	622	615	625	612	<b>624</b>	<b>613</b>	32	622	615	625	612	<b>624</b>	<b>613</b>
437.leslie3d	32	966	311	968	311	<b>967</b>	<b>311</b>	16	437	344	<b>437</b>	<b>344</b>	437	344
444.namd	32	<b>613</b>	<b>419</b>	620	414	610	421	32	605	425	614	418	<b>611</b>	<b>420</b>
447.dealII	32	392	935	<b>393</b>	<b>931</b>	399	916	32	392	935	<b>393</b>	<b>931</b>	399	916
450.soplex	32	826	323	819	326	<b>825</b>	<b>323</b>	16	380	351	378	353	<b>380</b>	<b>352</b>
453.povray	32	232	735	<b>232</b>	<b>735</b>	232	734	32	200	850	<b>199</b>	<b>855</b>	199	856
454.calculix	32	329	803	333	794	<b>332</b>	<b>796</b>	32	329	803	333	794	<b>332</b>	<b>796</b>
459.GemsFDTD	32	1193	285	1188	286	<b>1191</b>	<b>285</b>	32	1193	285	1188	286	<b>1191</b>	<b>285</b>
465.tonto	32	<b>540</b>	<b>584</b>	539	584	540	583	32	<b>518</b>	<b>608</b>	517	609	519	607
470.lbm	32	<b>794</b>	<b>554</b>	794	554	793	554	32	<b>794</b>	<b>554</b>	794	554	793	554
481.wrf	32	<b>633</b>	<b>565</b>	633	565	633	564	32	<b>631</b>	<b>566</b>	632	566	631	567
482.sphinx3	32	<b>1154</b>	<b>541</b>	1154	541	1164	536	32	<b>1154</b>	<b>541</b>	1154	541	1164	536

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS configuration:  
Set Power Efficiency Mode to Custom  
Baseboard Management Controller used to adjust the fan speed to 100%

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECfp\_rate2006 = 539

Huawei RH2288A V2 (Intel Xeon E5-2650 v2)

SPECfp\_rate\_base2006 = 526

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Aug-2014

Hardware Availability: Sep-2013

Software Availability: Nov-2013

## Platform Notes (Continued)

Sysinfo program /spec/config/sysinfo.rev6818  
\$Rev: 6818 \$ \$Date:: 2012-07-17 # \$ e86d102572650a6e4d596a3cee98f191  
running on localhost Fri Aug 22 17:18:16 2014

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-2650 v2 @ 2.60GHz
 2 "physical id"s (chips)
 32 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores : 8
  siblings  : 16
  physical 0: cores 0 1 2 3 4 5 6 7
  physical 1: cores 0 1 2 3 4 5 6 7
cache size : 20480 KB
```

```
From /proc/meminfo
MemTotal:      132103760 kB
HugePages_Total:    0
Hugepagesize:    2048 kB
```

```
/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 6.5 (Santiago)
```

```
From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server
```

```
uname -a:
Linux localhost 2.6.32-431.el6.x86_64 #1 SMP Sun Nov 10 22:19:54 EST 2013
x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Aug 22 05:53
```

```
SPEC is set to: /spec
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sdal       ext4  439G   67G  350G  17% /
```

```
Additional information from dmidecode:
BIOS Insyde Corp. RMIBV388 08/09/2014
Memory:
 8x Samsung M393B2G70QH0-CMA 16 GB 1866 MHz 2 rank
```

(End of data from sysinfo program)



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Huawei**

**SPECfp\_rate2006 = 539**

**Huawei RH2288A V2 (Intel Xeon E5-2650 v2)**

**SPECfp\_rate\_base2006 = 526**

**CPU2006 license:** 3175

**Test sponsor:** Huawei

**Tested by:** Huawei

**Test date:** Aug-2014

**Hardware Availability:** Sep-2013

**Software Availability:** Nov-2013

## General Notes

Environment variables set by runspec before the start of the run:  
LD\_LIBRARY\_PATH = "/spec/libs/32:/spec/libs/64:/spec/sh"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RedHat EL 6.4  
Transparent Huge Pages enabled with:  
echo always > /sys/kernel/mm/redhat\_transparent\_hugepage/enabled  
Filesystem page cache cleared with:  
echo 1> /proc/sys/vm/drop\_caches  
runspec command invoked through numactl i.e.:  
numactl --interleave=all runspec <etc>  
The Huawei RH2288A V2 and Huawei RH1288A V2 are electronically equivalent.  
The results have been measured on a Huawei RH2288A V2 model

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.lelie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.deallI: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECfp\_rate2006 = 539

Huawei RH2288A V2 (Intel Xeon E5-2650 v2)

SPECfp\_rate\_base2006 = 526

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Aug-2014

Hardware Availability: Sep-2013

Software Availability: Nov-2013

## Base Portability Flags (Continued)

482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:

-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias  
-opt-mem-layout-trans=3

C++ benchmarks:

-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias  
-opt-mem-layout-trans=3

Fortran benchmarks:

-xAVX -ipo -O3 -no-prec-div -opt-prefetch

Benchmarks using both Fortran and C:

-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias  
-opt-mem-layout-trans=3

## Peak Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks (except as noted below):

icpc -m64

450.soplex: icpc -m32

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64

416.gamess: -DSPEC\_CPU\_LP64

433.milc: -DSPEC\_CPU\_LP64

434.zeusmp: -DSPEC\_CPU\_LP64

435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main

436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/

Page 5



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECfp\_rate2006 = 539

Huawei RH2288A V2 (Intel Xeon E5-2650 v2)

SPECfp\_rate\_base2006 = 526

CPU2006 license: 3175

Test date: Aug-2014

Test sponsor: Huawei

Hardware Availability: Sep-2013

Tested by: Huawei

Software Availability: Nov-2013

## Peak Portability Flags (Continued)

437.leslie3d: -DSPEC\_CPU\_LP64  
 444.namd: -DSPEC\_CPU\_LP64  
 447.dealII: -DSPEC\_CPU\_LP64  
 453.povray: -DSPEC\_CPU\_LP64  
 454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
 459.GemsFDTD: -DSPEC\_CPU\_LP64  
 465.tonto: -DSPEC\_CPU\_LP64  
 470.lbm: -DSPEC\_CPU\_LP64  
 481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
 482.sphinx3: -DSPEC\_CPU\_LP64

## Peak Optimization Flags

### C benchmarks:

433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)  
 -prof-use(pass 2) -auto-ilp32

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

### C++ benchmarks:

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)  
 -prof-use(pass 2) -fno-alias -auto-ilp32

447.dealII: basepeak = yes

450.soplex: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)  
 -prof-use(pass 2) -opt-malloc-options=3

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)  
 -prof-use(pass 2) -unroll4 -ansi-alias

### Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
 -inline-level=0 -scalar-rep-

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECfp\_rate2006 = 539

Huawei RH2288A V2 (Intel Xeon E5-2650 v2)

SPECfp\_rate\_base2006 = 526

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Aug-2014

Hardware Availability: Sep-2013

Software Availability: Nov-2013

## Peak Optimization Flags (Continued)

434.zeusmp: basepeak = yes

437.leslie3d: -xAVX -ipo -O3 -no-prec-div -opt-prefetch

459.GemsFDTD: basepeak = yes

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto  
-inline-alloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)  
-prof-use(pass 2) -opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: -xAVX -ipo -O3 -no-prec-div -auto-ilp32

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>

<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-V1.0-IVB-RevG.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>

<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-V1.0-IVB-RevG.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Tue Dec 30 16:11:51 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 30 December 2014.