



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp<sup>®</sup>\_rate2006 = 1810

PowerEdge R930 (Intel Xeon E7-8860 v3, 2.20 GHz)

SPECfp\_rate\_base2006 = 1760

CPU2006 license: 55


Test date: Apr-2015

Test sponsor: Dell Inc.

Hardware Availability: Jun-2015

Tested by: Dell Inc.

Software Availability: Oct-2014

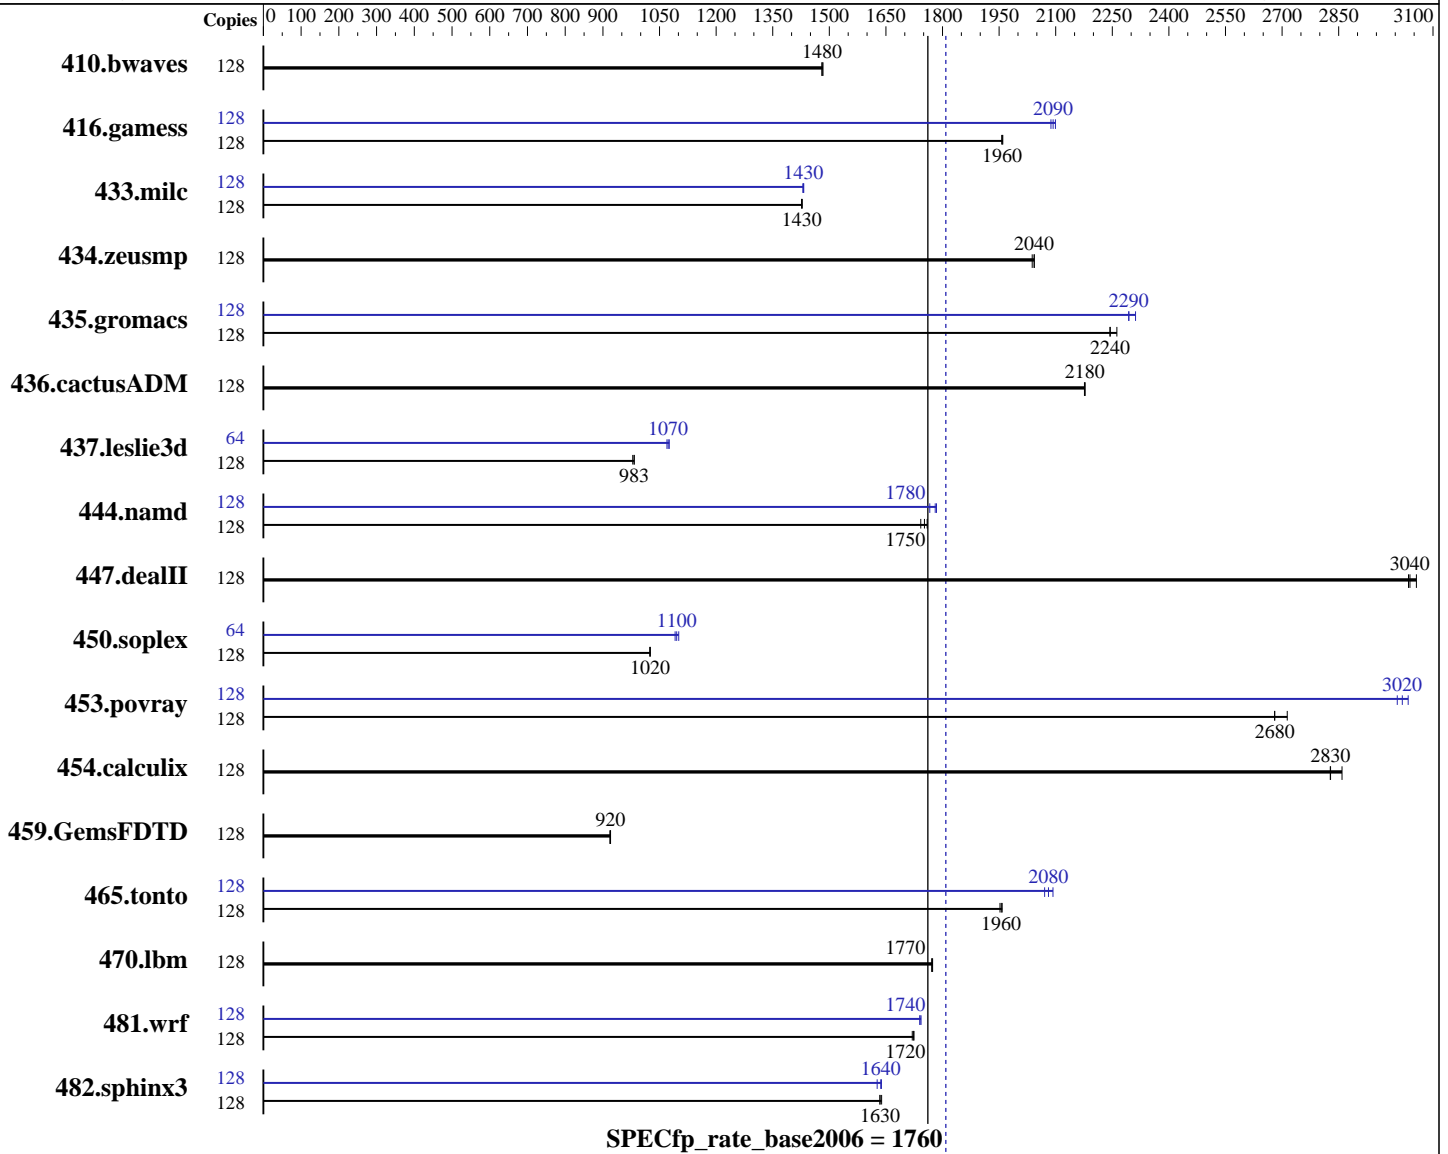

### Hardware

CPU Name: Intel Xeon E7-8860 v3  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.20 GHz  
 CPU MHz: 2200  
 FPU: Integrated  
 CPU(s) enabled: 64 cores, 4 chips, 16 cores/chip, 2 threads/core  
 CPU(s) orderable: 2,4 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

### Software

Operating System: SUSE Linux Enterprise Server 12  
 3.12.28-4-default  
 Compiler: C/C++: Version 15.0.0.090 of Intel C++ Studio XE for Linux;  
 Fortran: Version 15.0.0.090 of Intel Fortran Studio XE for Linux  
 Auto Parallel: No  
 File System: ext4  
 System State: Run level 3 (multi-user)

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp\_rate2006 = 1810

PowerEdge R930 (Intel Xeon E7-8860 v3, 2.20 GHz)

SPECfp\_rate\_base2006 = 1760

CPU2006 license: 55

Test date: Apr-2015

Test sponsor: Dell Inc.

Hardware Availability: Jun-2015

Tested by: Dell Inc.

Software Availability: Oct-2014

L3 Cache: 40 MB I+D on chip per chip  
Other Cache: None  
Memory: 512 GB (32 x 16 GB 2Rx4 PC4-2133P-R, running at 1600 MHz)  
Disk Subsystem: 2 x 200 GB SAS6 SSD, RAID0  
Other Hardware: None

Base Pointers: 32/64-bit  
Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	128	1173	1480	<b>1174</b>	<b>1480</b>	1175	1480	128	1173	1480	<b>1174</b>	<b>1480</b>	1175	1480
416.gamess	128	<b>1280</b>	<b>1960</b>	1279	1960	1281	1960	128	1201	2090	<b>1197</b>	<b>2090</b>	1194	2100
433.milc	128	824	1430	<b>823</b>	<b>1430</b>	823	1430	128	<b>821</b>	<b>1430</b>	822	1430	820	1430
434.zeusmp	128	570	2040	572	2040	<b>570</b>	<b>2040</b>	128	570	2040	572	2040	<b>570</b>	<b>2040</b>
435.gromacs	128	<b>407</b>	<b>2240</b>	404	2260	407	2240	128	399	2290	<b>398</b>	<b>2290</b>	395	2310
436.cactusADM	128	702	2180	703	2180	<b>702</b>	<b>2180</b>	128	702	2180	703	2180	<b>702</b>	<b>2180</b>
437.leslie3d	128	<b>1224</b>	<b>983</b>	1229	979	1224	983	64	562	1070	559	1080	<b>561</b>	<b>1070</b>
444.namd	128	584	1760	<b>586</b>	<b>1750</b>	589	1740	128	<b>577</b>	<b>1780</b>	581	1770	575	1780
447.dealII	128	479	3060	<b>482</b>	<b>3040</b>	482	3040	128	479	3060	<b>482</b>	<b>3040</b>	482	3040
450.soplex	128	<b>1042</b>	<b>1020</b>	1041	1030	1042	1020	64	489	1090	485	1100	<b>487</b>	<b>1100</b>
453.povray	128	251	2710	<b>254</b>	<b>2680</b>	254	2680	128	227	3010	224	3030	<b>226</b>	<b>3020</b>
454.calculix	128	369	2860	373	2830	<b>373</b>	<b>2830</b>	128	369	2860	373	2830	<b>373</b>	<b>2830</b>
459.GemsFDTD	128	1479	918	<b>1477</b>	<b>920</b>	1476	920	128	1479	918	<b>1477</b>	<b>920</b>	1476	920
465.tonto	128	<b>644</b>	<b>1960</b>	643	1960	645	1950	128	602	2090	<b>605</b>	<b>2080</b>	608	2070
470.lbm	128	993	1770	<b>992</b>	<b>1770</b>	992	1770	128	993	1770	<b>992</b>	<b>1770</b>	992	1770
481.wrf	128	829	1720	831	1720	<b>830</b>	<b>1720</b>	128	<b>822</b>	<b>1740</b>	822	1740	820	1740
482.sphinx3	128	1522	1640	<b>1526</b>	<b>1630</b>	1527	1630	128	<b>1525</b>	<b>1640</b>	1523	1640	1534	1630

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS Settings:  
Virtualization Technology disabled  
System Profile set to Custom

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp\_rate2006 = 1810

PowerEdge R930 (Intel Xeon E7-8860 v3, 2.20 GHz)

SPECfp\_rate\_base2006 = 1760

CPU2006 license: 55

Test date: Apr-2015

Test sponsor: Dell Inc.

Hardware Availability: Jun-2015

Tested by: Dell Inc.

Software Availability: Oct-2014

## Platform Notes (Continued)

CPU Power Management set to Maximum Performance  
 Memory Frequency set to Maximum Performance  
 Turbo Boost enabled  
 Energy Efficient Turbo disabled  
 C1E disabled  
 C States disabled  
 Collaborative CPU Performance Control disabled  
 Memory Patrol Scrub disabled  
 Memory Refresh Rate set to 1x  
 Uncore Frequency set to Maximum  
 Energy Efficient Policy set to Performance  
 Monitor/MWait enabled

Sysinfo program

```
/root/Desktop/Performance/ic15.0_Aug29_2014/config/sysinfo.rev6914
$Rev: 6914 $ $Date:: 2014-06-25 #$ e3fbb8667b5a285932ceab81e28219e1
running on linux-w3lk Sat Apr 11 04:40:37 2015
```

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see: <http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name      : Intel(R) Xeon(R) CPU E7-8860 v3 @ 2.20GHz
 4 "physical id"s (chips)
 128 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores      : 16
siblings       : 32
physical 0:    cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
physical 1:    cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
physical 2:    cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
physical 3:    cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
cache size     : 40960 KB
```

From /proc/meminfo

```
MemTotal:      529207312 kB
HugePages_Total: 0
Hugepagesize:   2048 kB
```

/usr/bin/lsc\_release -d

SUSE Linux Enterprise Server 12

From /etc/\*release\* /etc/\*version\*

```
SuSE-release:
SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 0
# This file is deprecated and will be removed in a future service pack or release.
```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp\_rate2006 = 1810

PowerEdge R930 (Intel Xeon E7-8860 v3, 2.20 GHz)

SPECfp\_rate\_base2006 = 1760

CPU2006 license: 55

Test date: Apr-2015

Test sponsor: Dell Inc.

Hardware Availability: Jun-2015

Tested by: Dell Inc.

Software Availability: Oct-2014

## Platform Notes (Continued)

```
# Please check /etc/os-release for details about this release.
os-release:
NAME="SLES"
VERSION="12"
VERSION_ID="12"
PRETTY_NAME="SUSE Linux Enterprise Server 12"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12"

uname -a:
Linux linux-w3lk 3.12.28-4-default #1 SMP Thu Sep 25 17:02:34 UTC 2014
(9879bd4) x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Apr 10 15:40 last=5

SPEC is set to: /root/Desktop/Performance/ic15.0_Aug29_2014
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda3       ext4 364G  11G 353G   3% /
Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program
reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to
hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS Dell Inc. 1.0.1 [MRC_096] 03/27/2015
Memory:
32x 00AD00B300AD Not Specified 16 GB 2 rank 2133 MHz, configured at 1600 MHz
64x Not Specified Not Specified

(End of data from sysinfo program)
```

## General Notes

Environment variables set by runspec before the start of the run:

LD\_LIBRARY\_PATH = \*/root/Desktop/Performance/ic15.0\_Aug29\_2014/libs/32:/root/Desktop/Performance/ic15.0\_Aug29\_2014/libs/64:/root/Desktop/Performance/ic15.0\_Aug29\_2014/sh\*

```
Binaries compiled on a system with 1x Core i5-4670K CPU + 16GB
memory using RedHat EL 7.0
Transparent Huge Pages enabled with:
echo always > /sys/kernel/mm/transparent_hugepage/enabled
Filesystem page cache cleared with:
echo 1> /proc/sys/vm/drop_caches
runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>
```



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp\_rate2006 = 1810

PowerEdge R930 (Intel Xeon E7-8860 v3, 2.20 GHz)

SPECfp\_rate\_base2006 = 1760

CPU2006 license: 55

Test date: Apr-2015

Test sponsor: Dell Inc.

Hardware Availability: Jun-2015

Tested by: Dell Inc.

Software Availability: Oct-2014

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
 416.gamess: -DSPEC\_CPU\_LP64  
 433.milc: -DSPEC\_CPU\_LP64  
 434.zeusmp: -DSPEC\_CPU\_LP64  
 435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
 436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
 437.leslie3d: -DSPEC\_CPU\_LP64  
 444.namd: -DSPEC\_CPU\_LP64  
 447.dealII: -DSPEC\_CPU\_LP64  
 450.soplex: -DSPEC\_CPU\_LP64  
 453.povray: -DSPEC\_CPU\_LP64  
 454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
 459.GemsFDTD: -DSPEC\_CPU\_LP64  
 465.tonto: -DSPEC\_CPU\_LP64  
 470.lbm: -DSPEC\_CPU\_LP64  
 481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
 482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3

Fortran benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp\_rate2006 = 1810

PowerEdge R930 (Intel Xeon E7-8860 v3, 2.20 GHz)

SPECfp\_rate\_base2006 = 1760

CPU2006 license: 55

Test date: Apr-2015

Test sponsor: Dell Inc.

Hardware Availability: Jun-2015

Tested by: Dell Inc.

Software Availability: Oct-2014

## Base Optimization Flags (Continued)

Benchmarks using both Fortran and C:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3

## Peak Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks (except as noted below):

icpc -m64

450.soplex: icpc -m32 -L/opt/intel/composer\_xe\_2015/lib/ia32

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64

## Peak Optimization Flags

C benchmarks:

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp\_rate2006 = 1810

PowerEdge R930 (Intel Xeon E7-8860 v3, 2.20 GHz)

SPECfp\_rate\_base2006 = 1760

CPU2006 license: 55

Test date: Apr-2015

Test sponsor: Dell Inc.

Hardware Availability: Jun-2015

Tested by: Dell Inc.

Software Availability: Oct-2014

## Peak Optimization Flags (Continued)

433.milc: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2)  
-opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)  
-auto-ilp32

470.lbm: basepeak = yes

482.sphinx3: -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-mem-layout-trans=3  
-unroll2

### C++ benchmarks:

444.namd: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2)  
-opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -fno-alias  
-auto-ilp32

447.dealII: basepeak = yes

450.soplex: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2)  
-opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)  
-opt-malloc-options=3

453.povray: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2)  
-opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -unroll4  
-ansi-alias

### Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

459.GemsFDTD: basepeak = yes

465.tonto: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4  
-auto -inline-calloc -opt-malloc-options=3

### Benchmarks using both Fortran and C:

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp\_rate2006 = 1810

PowerEdge R930 (Intel Xeon E7-8860 v3, 2.20 GHz)

SPECfp\_rate\_base2006 = 1760

CPU2006 license: 55

Test date: Apr-2015

Test sponsor: Dell Inc.

Hardware Availability: Jun-2015

Tested by: Dell Inc.

Software Availability: Oct-2014

## Peak Optimization Flags (Continued)

435.gromacs: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2)  
-opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)  
-opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: -xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revE.20150421.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revE.20150421.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Tue May 5 15:15:25 2015 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 5 May 2015.