



# SPEC® CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Dell Inc.

SPECint®\_rate2006 = 1520

PowerEdge FC630 (Intel Xeon E5-2697 v4, 2.30 GHz)

SPECint\_rate\_base2006 = 1460

CPU2006 license: 55


Test date: Jan-2016

Test sponsor: Dell Inc.

Hardware Availability: Mar-2016

Tested by: Dell Inc.

Software Availability: Sep-2015

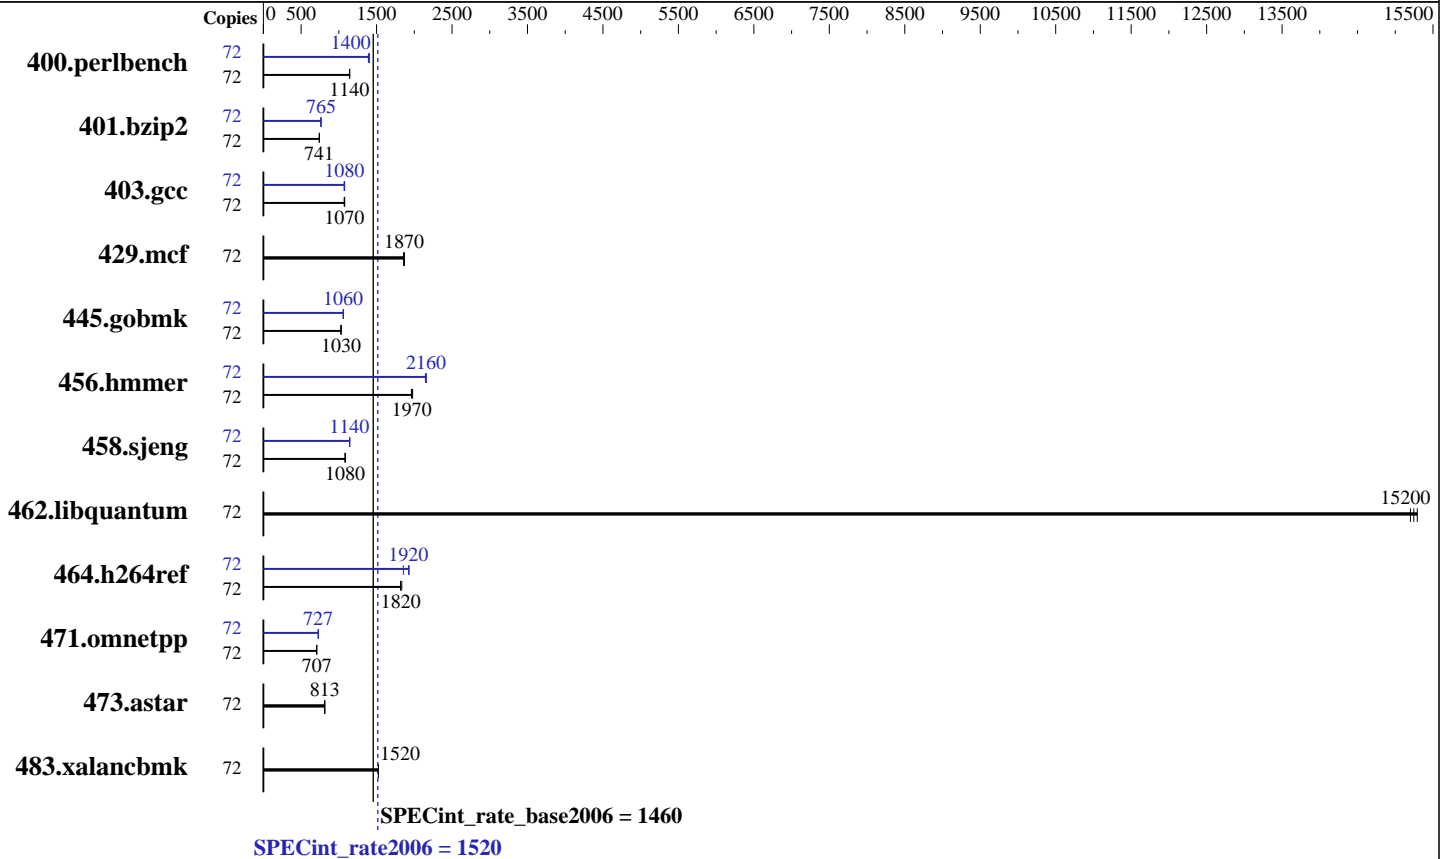

## Hardware

CPU Name: Intel Xeon E5-2697 v4  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.60 GHz  
 CPU MHz: 2400  
 FPU: Integrated  
 CPU(s) enabled: 36 cores, 2 chips, 18 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 45 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 256 GB (8 x 32 GB 2Rx4 PC4-2400T-R)  
 Disk Subsystem: 1 x 300 GB 10000 RPM SAS  
 Other Hardware: None

## Software

Operating System: Red Hat Enterprise Linux Server release 7.1 (Maipo)  
 3.10.0-229.el7.x86\_64  
 Compiler: C/C++: Version 16.0.0.101 of Intel C++ Studio XE for Linux  
 Auto Parallel: No  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V10.2



# SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Dell Inc.

SPECint\_rate2006 = 1520

PowerEdge FC630 (Intel Xeon E5-2697 v4, 2.30 GHz)

SPECint\_rate\_base2006 = 1460

CPU2006 license: 55  
Test sponsor: Dell Inc.  
Tested by: Dell Inc.

Test date: Jan-2016  
Hardware Availability: Mar-2016  
Software Availability: Sep-2015

## Results Table

Benchmark	Base						Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	72	617	1140	615	1140	<u>615</u>	<u>1140</u>	72	501	1410	505	1390	<u>503</u>	<u>1400</u>
401.bzip2	72	<u>937</u>	<u>741</u>	938	741	935	743	72	<u>909</u>	<u>765</u>	909	765	914	760
403.gcc	72	<u>540</u>	<u>1070</u>	541	1070	538	1080	72	<u>539</u>	<u>1080</u>	538	1080	542	1070
429.mcf	72	351	1870	353	1860	<u>352</u>	<u>1870</u>	72	351	1870	353	1860	<u>352</u>	<u>1870</u>
445.gobmk	72	733	1030	<u>733</u>	<u>1030</u>	735	1030	72	<u>713</u>	<u>1060</u>	714	1060	712	1060
456.hammer	72	<u>341</u>	<u>1970</u>	342	1960	340	1980	72	311	2160	<u>312</u>	<u>2160</u>	313	2150
458.sjeng	72	<u>804</u>	<u>1080</u>	805	1080	801	1090	72	760	1150	<u>762</u>	<u>1140</u>	763	1140
462.libquantum	72	97.6	15300	<u>97.9</u>	<u>15200</u>	98.1	15200	72	97.6	15300	<u>97.9</u>	<u>15200</u>	98.1	15200
464.h264ref	72	869	1830	<u>876</u>	<u>1820</u>	877	1820	72	859	1860	825	1930	<u>828</u>	<u>1920</u>
471.omnetpp	72	636	708	639	704	<u>636</u>	<u>707</u>	72	618	728	619	727	<u>619</u>	<u>727</u>
473.astar	72	621	814	623	811	<u>622</u>	<u>813</u>	72	621	814	623	811	<u>622</u>	<u>813</u>
483.xalancbmk	72	326	1520	326	1530	<u>326</u>	<u>1520</u>	72	326	1520	326	1530	<u>326</u>	<u>1520</u>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS settings:  
Snoop Mode set to Cluster on Die  
Virtualization Technology disabled  
System Profile set to Performance  
Memory Patrol Scrub disabled  
Sysinfo program /root/cpu2006-1.2/config/sysinfo.rev6914  
\$Rev: 6914 \$ \$Date:: 2014-06-25 #\$ e3fbb8667b5a285932ceab81e28219e1  
running on localhost.localdomain Tue Jan 19 10:23:05 2016

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo  
model name : Intel(R) Xeon(R) CPU E5-2697 v4 @ 2.30GHz  
2 "physical id"s (chips)  
72 "processors"

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Dell Inc.

SPECint\_rate2006 = 1520

PowerEdge FC630 (Intel Xeon E5-2697 v4, 2.30 GHz)

SPECint\_rate\_base2006 = 1460

CPU2006 license: 55

Test date: Jan-2016

Test sponsor: Dell Inc.

Hardware Availability: Mar-2016

Tested by: Dell Inc.

Software Availability: Sep-2015

## Platform Notes (Continued)

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

```
cpu cores : 18
siblings  : 36
physical 0: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
physical 1: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
cache size : 23040 KB
```

From /proc/meminfo

```
MemTotal:      264042640 kB
HugePages_Total: 0
Hugepagesize:   2048 kB
```

From /etc/\*release\* /etc/\*version\*

```
os-release:
NAME="Red Hat Enterprise Linux Server"
VERSION="7.1 (Maipo)"
ID="rhel"
ID_LIKE="fedora"
VERSION_ID="7.1"
PRETTY_NAME="Red Hat Enterprise Linux Server 7.1 (Maipo)"
ANSI_COLOR="0;31"
CPE_NAME="cpe:/o:redhat:enterprise_linux:7.1:GA:server"
redhat-release: Red Hat Enterprise Linux Server release 7.1 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.1 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.1:ga:server
```

uname -a:

```
Linux localhost.localdomain 3.10.0-229.el7.x86_64 #1 SMP Thu Jan 29 18:37:38
EST 2015 x86_64 x86_64 x86_64 GNU/Linux
```

run-level 3 Jan 19 10:22

SPEC is set to: /root/cpu2006-1.2

```
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda2        xfs   218G  7.8G  211G   4% /
```

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS Dell Inc. 1.7.12 12/23/2015

Memory:

```
8x 00CE00B300CE M393A4K40BB1-CRC 32 GB 2 rank 2400 MHz
16x Not Specified Not Specified
```

(End of data from sysinfo program)



# SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Dell Inc.

SPECint\_rate2006 = 1520

PowerEdge FC630 (Intel Xeon E5-2697 v4, 2.30 GHz)

SPECint\_rate\_base2006 = 1460

CPU2006 license: 55

Test date: Jan-2016

Test sponsor: Dell Inc.

Hardware Availability: Mar-2016

Tested by: Dell Inc.

Software Availability: Sep-2015

## General Notes

Environment variables set by runspec before the start of the run:

LD\_LIBRARY\_PATH = "/root/cpu2006-1.2/libs/32:/root/cpu2006-1.2/libs/64:/root/cpu2006-1.2/sh"

Binaries compiled on a system with 1x Intel Core i5-4670K CPU + 32GB memory using RedHat EL 7.1

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/transparent\_hugepage/enabled

Filesystem page cache cleared with:

echo 1> /proc/sys/vm/drop\_caches

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

## Base Compiler Invocation

C benchmarks:

icc -m32 -L/opt/intel/compilers\_and\_libraries\_2016/linux/compiler/lib/ia32\_lin

C++ benchmarks:

icpc -m32 -L/opt/intel/compilers\_and\_libraries\_2016/linux/compiler/lib/ia32\_lin

## Base Portability Flags

400.perlbench: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LINUX\_IA32  
401.bzip2: -D\_FILE\_OFFSET\_BITS=64  
403.gcc: -D\_FILE\_OFFSET\_BITS=64  
429.mcf: -D\_FILE\_OFFSET\_BITS=64  
445.gobmk: -D\_FILE\_OFFSET\_BITS=64  
456.hmmer: -D\_FILE\_OFFSET\_BITS=64  
458.sjeng: -D\_FILE\_OFFSET\_BITS=64  
462.libquantum: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LINUX  
464.h264ref: -D\_FILE\_OFFSET\_BITS=64  
471.omnetpp: -D\_FILE\_OFFSET\_BITS=64  
473.astar: -D\_FILE\_OFFSET\_BITS=64  
483.xalancbmk: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch  
-opt-mem-layout-trans=3

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch  
-opt-mem-layout-trans=3 -Wl,-z,muldefs -L/sh -lsmarheap



# SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Dell Inc.

SPECint\_rate2006 = 1520

PowerEdge FC630 (Intel Xeon E5-2697 v4, 2.30 GHz)

SPECint\_rate\_base2006 = 1460

CPU2006 license: 55

Test date: Jan-2016

Test sponsor: Dell Inc.

Hardware Availability: Mar-2016

Tested by: Dell Inc.

Software Availability: Sep-2015

## Base Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m32 -L/opt/intel/compilers\_and\_libraries\_2016/linux/compiler/lib/ia32\_lin

400.perlbench: icc -m64

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

C++ benchmarks:

icpc -m32 -L/opt/intel/compilers\_and\_libraries\_2016/linux/compiler/lib/ia32\_lin

## Peak Portability Flags

400.perlbench: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64  
 401.bzip2: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LP64  
 403.gcc: -D\_FILE\_OFFSET\_BITS=64  
 429.mcf: -D\_FILE\_OFFSET\_BITS=64  
 445.gobmk: -D\_FILE\_OFFSET\_BITS=64  
 456.hmmer: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LP64  
 458.sjeng: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LP64  
 462.libquantum: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LINUX  
 464.h264ref: -D\_FILE\_OFFSET\_BITS=64  
 471.omnetpp: -D\_FILE\_OFFSET\_BITS=64  
 473.astar: -D\_FILE\_OFFSET\_BITS=64  
 483.xalancbmk: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
 -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
 -par-num-threads=1(pass 1) -prof-use(pass 2) -auto-ilp32

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Dell Inc.

SPECint\_rate2006 = 1520

PowerEdge FC630 (Intel Xeon E5-2697 v4, 2.30 GHz)

SPECint\_rate\_base2006 = 1460

CPU2006 license: 55

Test date: Jan-2016

Test sponsor: Dell Inc.

Hardware Availability: Mar-2016

Tested by: Dell Inc.

Software Availability: Sep-2015

## Peak Optimization Flags (Continued)

401.bzip2: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -opt-prefetch  
-auto-ilp32 -ansi-alias

403.gcc: -xCORE-AVX2 -ipo -O3 -no-prec-div

429.mcf: basepeak = yes

445.gobmk: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-prof-use(pass 2) -par-num-threads=1(pass 1) -ansi-alias  
-opt-mem-layout-trans=3

456.hmmr: -xCORE-AVX2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32

458.sjeng: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll4  
-auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll2  
-ansi-alias

C++ benchmarks:

471.omnetpp: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -ansi-alias  
-opt-ra-region-strategy=block -Wl,-z,muldefs  
-L/sh -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca



# SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Dell Inc.

SPECint\_rate2006 = 1520

PowerEdge FC630 (Intel Xeon E5-2697 v4, 2.30 GHz)

SPECint\_rate\_base2006 = 1460

CPU2006 license: 55

Test date: Jan-2016

Test sponsor: Dell Inc.

Hardware Availability: Mar-2016

Tested by: Dell Inc.

Software Availability: Sep-2015

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revD.20151006.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revD.20151006.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Tue Apr 5 14:55:17 2016 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 5 April 2016.