



SPEC[®] CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

NEC Corporation

SPECfp[®]_rate2006 = **685**

Express5800/R120g-2M (Intel Xeon E5-2630 v4)

SPECfp_rate_base2006 = 670

CPU2006 license: 9006


Test date: Apr-2016

Test sponsor: NEC Corporation

Hardware Availability: Apr-2016

Tested by: NEC Corporation

Software Availability: Jan-2016

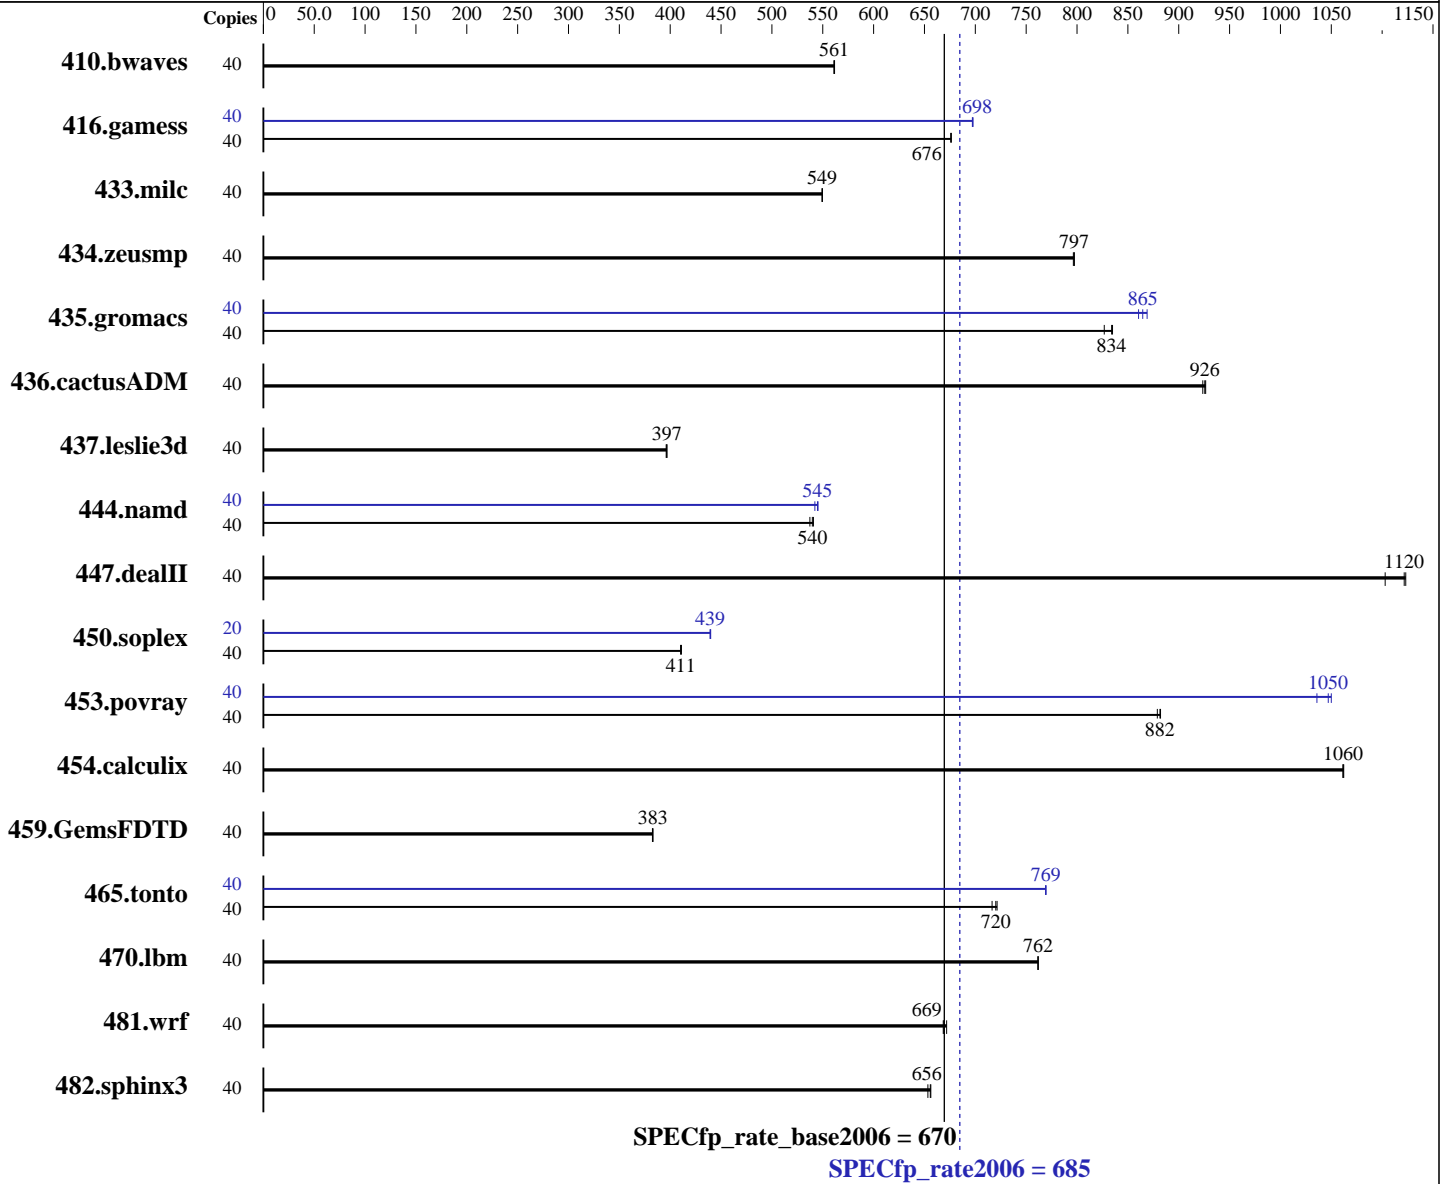

Hardware

CPU Name: Intel Xeon E5-2630 v4
 CPU Characteristics: Intel Turbo Boost Technology up to 3.10 GHz
 CPU MHz: 2200
 FPU: Integrated
 CPU(s) enabled: 20 cores, 2 chips, 10 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: Red Hat Enterprise Linux Server release 7.2 (Maipo)
 Kernel 3.10.0-327.4.5.el7.x86_64
 Compiler: C/C++: Version 16.0.0.101 of Intel C++ Studio XE for Linux;
 Fortran: Version 16.0.0.101 of Intel Fortran Studio XE for Linux
 Auto Parallel: No
 File System: ext4

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

NEC Corporation

SPECfp_rate2006 = **685**

Express5800/R120g-2M (Intel Xeon E5-2630 v4)

SPECfp_rate_base2006 = **670**

CPU2006 license: 9006

Test date: Apr-2016

Test sponsor: NEC Corporation

Hardware Availability: Apr-2016

Tested by: NEC Corporation

Software Availability: Jan-2016

L3 Cache: 25 MB I+D on chip per chip
 Other Cache: None
 Memory: 256 GB (16 x 16 GB 2Rx4 PC4-2400T-R, running at 2133 MHz)
 Disk Subsystem: 1 x 1 TB SATA, 7200 RPM
 Other Hardware: None

System State: Run level 3 (multi-user)
 Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: None

Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio		
410.bwaves	40	969	561	968	562	969	561	40	969	561	968	562	969	561		
416.gamess	40	1158	676	1158	676	1159	676	40	1123	698	1123	698	1124	697		
433.milc	40	668	549	668	550	668	549	40	668	549	668	550	668	549		
434.zeusmp	40	457	796	457	797	457	797	40	457	796	457	797	457	797		
435.gromacs	40	342	835	342	834	345	827	40	329	869	330	865	332	860		
436.cactusADM	40	518	924	516	926	516	926	40	518	924	516	926	516	926		
437.leslie3d	40	948	397	948	397	949	396	40	948	397	948	397	949	396		
444.namd	40	593	541	594	540	597	537	40	592	542	588	545	589	545		
447.dealII	40	407	1120	415	1100	408	1120	40	407	1120	415	1100	408	1120		
450.soplex	40	813	411	812	411	813	410	20	379	440	380	439	380	439		
453.povray	40	242	879	241	882	241	882	40	203	1050	203	1050	205	1040		
454.calculix	40	311	1060	311	1060	311	1060	40	311	1060	311	1060	311	1060		
459.GemsFDTD	40	1109	383	1109	383	1108	383	40	1109	383	1109	383	1108	383		
465.tonto	40	546	721	547	720	549	716	40	512	769	512	769	512	769		
470.lbm	40	721	762	722	762	721	762	40	721	762	722	762	721	762		
481.wrf	40	665	672	668	669	668	668	40	665	672	668	669	668	668		
482.sphinx3	40	1193	653	1188	656	1189	656	40	1193	653	1188	656	1189	656		

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

BIOS Settings:
Power Management Policy: Custom
Energy Performance: Performance

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

NEC Corporation

SPECfp_rate2006 = 685

Express5800/R120g-2M (Intel Xeon E5-2630 v4)

SPECfp_rate_base2006 = 670

CPU2006 license: 9006

Test date: Apr-2016

Test sponsor: NEC Corporation

Hardware Availability: Apr-2016

Tested by: NEC Corporation

Software Availability: Jan-2016

Platform Notes (Continued)

Patrol Scrub: Disabled
Snoop Mode: Home Snoop with Directory

General Notes

Environment variables set by runspec before the start of the run:

```
LD_LIBRARY_PATH = "/home/cpu2006/libs/32:/home/cpu2006/libs/64:/home/cpu2006/sh"
```

Binaries compiled on a system with 1x Intel Core i5-4670K CPU + 32GB memory using RedHat EL 7.1

The Express5800/R120g-1M (Intel Xeon E5-2630 v4) and the Express5800/R120g-2M (Intel Xeon E5-2630 v4) models are electronically equivalent. The results have been measured on the Express5800/R120g-2M (Intel Xeon E5-2630 v4) model.

Transparent Huge Pages enabled with:

```
echo always > /sys/kernel/mm/transparent_hugepage/enabled
```

Filesystem page cache cleared with:

```
echo 1 > /proc/sys/vm/drop_caches
```

runspec command invoked through numactl i.e.:

```
numactl --interleave=all runspec <etc>
```

Base Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64

416.gamess: -DSPEC_CPU_LP64

433.milc: -DSPEC_CPU_LP64

434.zeusmp: -DSPEC_CPU_LP64

435.gromacs: -DSPEC_CPU_LP64 -nofor_main

436.cactusADM: -DSPEC_CPU_LP64 -nofor_main

437.lelie3d: -DSPEC_CPU_LP64

444.namd: -DSPEC_CPU_LP64

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/

Page 3



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

NEC Corporation

SPECfp_rate2006 = 685

Express5800/R120g-2M (Intel Xeon E5-2630 v4)

SPECfp_rate_base2006 = 670

CPU2006 license: 9006

Test date: Apr-2016

Test sponsor: NEC Corporation

Hardware Availability: Apr-2016

Tested by: NEC Corporation

Software Availability: Jan-2016

Base Portability Flags (Continued)

```

447.deallI: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

Base Optimization Flags

C benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

```

C++ benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

```

Fortran benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

```

Benchmarks using both Fortran and C:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

```

Peak Compiler Invocation

C benchmarks:

```

icc -m64

```

C++ benchmarks (except as noted below):

```

icpc -m64

```

```

450.soplex: icpc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin

```

Fortran benchmarks:

```

ifort -m64

```

Benchmarks using both Fortran and C:

```

icc -m64 ifort -m64

```



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

NEC Corporation

SPECfp_rate2006 = 685

Express5800/R120g-2M (Intel Xeon E5-2630 v4)

SPECfp_rate_base2006 = 670

CPU2006 license: 9006

Test date: Apr-2016

Test sponsor: NEC Corporation

Hardware Availability: Apr-2016

Tested by: NEC Corporation

Software Availability: Jan-2016

Peak Portability Flags

```

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.lelie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -D_FILE_OFFSET_BITS=64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

```

444.namd: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
         -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
         -par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)
         -prof-use(pass 2) -fno-alias -auto-ilp32

```

447.dealII: basepeak = yes

```

450.soplex: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
           -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
           -par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)
           -prof-use(pass 2) -opt-malloc-options=3

```

```

453.povray: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
           -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
           -par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)
           -prof-use(pass 2) -unroll4 -ansi-alias

```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

NEC Corporation

SPECfp_rate2006 = 685

Express5800/R120g-2M (Intel Xeon E5-2630 v4)

SPECfp_rate_base2006 = 670

CPU2006 license: 9006

Test date: Apr-2016

Test sponsor: NEC Corporation

Hardware Availability: Apr-2016

Tested by: NEC Corporation

Software Availability: Jan-2016

Peak Optimization Flags (Continued)

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll2
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: basepeak = yes

465.tonto: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll4 -auto
-inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/NEC-Platform-Settings-V1.2-120g-RevC.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/NEC-Platform-Settings-V1.2-120g-RevC.xml>



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

NEC Corporation

SPECfp_rate2006 = 685

Express5800/R120g-2M (Intel Xeon E5-2630 v4)

SPECfp_rate_base2006 = 670

CPU2006 license: 9006

Test sponsor: NEC Corporation

Tested by: NEC Corporation

Test date: Apr-2016

Hardware Availability: Apr-2016

Software Availability: Jan-2016

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Wed Jun 1 19:08:57 2016 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 1 June 2016.