



SPEC® CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp®_rate2006 = Not Run

PowerEdge R630 (Intel Xeon E5-2699A v4, 2.40 GHz)

SPECfp_rate_base2006 = 1090

CPU2006 license: 55


Test date: Sep-2016

Test sponsor: Dell Inc.

Hardware Availability: Oct-2016

Tested by: Dell Inc.

Software Availability: Jun-2016

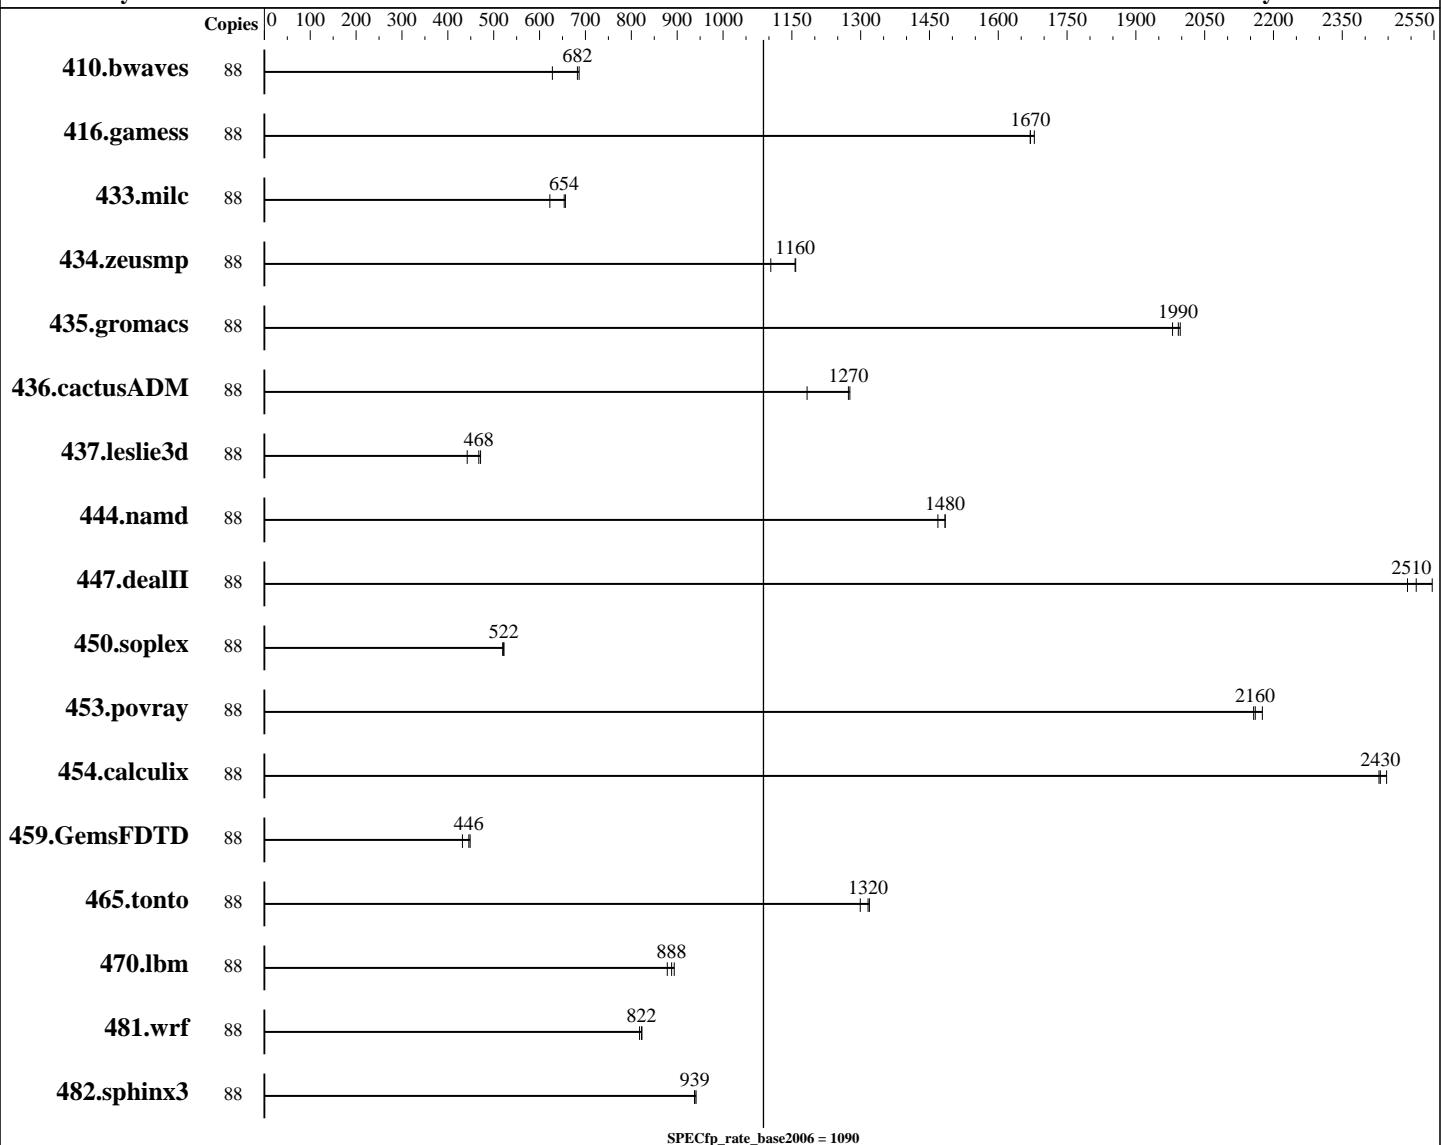

Hardware

CPU Name: Intel Xeon E5-2699A v4
CPU Characteristics: Intel Turbo Boost Technology up to 3.60 GHz
CPU MHz: 2400
FPU: Integrated
CPU(s) enabled: 44 cores, 2 chips, 22 cores/chip, 2 threads/core
CPU(s) orderable: 1,2 chip
Primary Cache: 32 KB I + 32 KB D on chip per core
Secondary Cache: 256 KB I+D on chip per core

Software

Operating System: SUSE Linux Enterprise Server 12 SP1 3.12.49-11-default
Compiler: C/C++: Version 16.0.0.101 of Intel C++ Studio XE for Linux;
Fortran: Version 16.0.0.101 of Intel Fortran Studio XE for Linux
Auto Parallel: No
File System: xfs
System State: Run level 3 (multi-user)

Continued on next page

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = Not Run

PowerEdge R630 (Intel Xeon E5-2699A v4, 2.40 GHz)

SPECfp_rate_base2006 = 1090

CPU2006 license: 55

Test date: Sep-2016

Test sponsor: Dell Inc.

Hardware Availability: Oct-2016

Tested by: Dell Inc.

Software Availability: Jun-2016

L3 Cache: 55 MB I+D on chip per chip
 Other Cache: None
 Memory: 512 GB (16 x 32 GB 2Rx4 PC4-2400T-R)
 Disk Subsystem: 1 x 120 GB SATA SSD
 Other Hardware: None

Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	88	1905	628	1752	682	1743	686							
416.gamess	88	1032	1670	1026	1680	1032	1670							
433.milc	88	1298	622	1236	654	1231	656							
434.zeusmp	88	725	1100	691	1160	692	1160							
435.gromacs	88	315	1990	315	2000	317	1980							
436.cactusADM	88	889	1180	826	1270	824	1280							
437.leslie3d	88	1871	442	1769	468	1755	471							
444.namd	88	476	1480	476	1480	481	1470							
447.dealII	88	404	2490	401	2510	395	2550							
450.soplex	88	1413	519	1405	522	1407	522							
453.povray	88	217	2160	217	2160	215	2180							
454.calculix	88	298	2430	297	2450	299	2430							
459.GemsFDTD	88	2162	432	2081	449	2094	446							
465.tonto	88	658	1320	656	1320	667	1300							
470.lbm	88	1377	878	1353	894	1362	888							
481.wrf	88	1196	822	1194	823	1202	818							
482.sphinx3	88	1828	939	1829	938	1822	941							

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

BIOS settings:

Snoop Mode set to Cluster on Die

Virtualization Technology disabled

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = Not Run

PowerEdge R630 (Intel Xeon E5-2699A v4, 2.40 GHz)

SPECfp_rate_base2006 = 1090

CPU2006 license: 55

Test date: Sep-2016

Test sponsor: Dell Inc.

Hardware Availability: Oct-2016

Tested by: Dell Inc.

Software Availability: Jun-2016

Platform Notes (Continued)

System Profile set to Custom

CPU Power Management set to Maximum Performance

C States set to Disabled

C1E disabled

Energy Efficient Turbo disabled

Uncore Frequency set to Dynamic

Energy Efficiency Policy set to Balanced Performance

Memory Patrol Scrub disabled

Sysinfo program /root/cpu2006-1.2/config/sysinfo.rev6914

\$Rev: 6914 \$ \$Date:: 2014-06-25 #\$ e3fbb8667b5a285932ceab81e28219e1

running on linux-b0uv Tue Sep 13 11:44:55 2016

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-2699A v4 @ 2.40GHz
        2 "physical id"s (chips)
        88 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
cpu cores : 22
siblings : 44
physical 0: cores 0 1 2 3 4 5 8 9 10 11 12 16 17 18 19 20 21 24 25 26 27
28
physical 1: cores 0 1 2 3 4 5 8 9 10 11 12 16 17 18 19 20 21 24 25 26 27
28
cache size : 28160 KB
```

```
From /proc/meminfo
MemTotal:      529332888 kB
HugePages_Total:       0
Hugepagesize:     2048 kB
```

```
/usr/bin/lsb_release -d
SUSE Linux Enterprise Server 12 SP1
```

```
From /etc/*release* /etc/*version*
SuSE-release:
        SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 1
# This file is deprecated and will be removed in a future service pack or
release.
# Please check /etc/os-release for details about this release.
os-release:
        NAME="SLES"
VERSION="12-SP1"
VERSION_ID="12.1"
PRETTY_NAME="SUSE Linux Enterprise Server 12 SP1"
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = Not Run

PowerEdge R630 (Intel Xeon E5-2699A v4, 2.40 GHz)

SPECfp_rate_base2006 = 1090

CPU2006 license: 55

Test date: Sep-2016

Test sponsor: Dell Inc.

Hardware Availability: Oct-2016

Tested by: Dell Inc.

Software Availability: Jun-2016

Platform Notes (Continued)

```
ID="sles"  
ANSI_COLOR="0;32"  
CPE_NAME="cpe:/o:suse:sles:12:sp1"
```

```
uname -a:  
Linux linux-b0uv 3.12.49-11-default #1 SMP Wed Nov 11 20:52:43 UTC 2015  
(8d714a0) x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Sep 13 11:41
```

```
SPEC is set to: /root/cpu2006-1.2  
Filesystem      Type  Size  Used   Avail Use% Mounted on  
/dev/sda2        xfs   110G   7.7G  103G   8% /  
Additional information from dmidecode:
```

```
Warning: Use caution when you interpret this section. The 'dmidecode' program  
reads system data which is "intended to allow hardware to be accurately  
determined", but the intent may not be met, as there are frequent changes to  
hardware, firmware, and the "DMTF SMBIOS" standard.
```

```
BIOS Dell Inc. 2.1.7 06/16/2016
```

```
Memory:
```

```
16x 00CE00B300CE M393A4K40BB1-CRC 32 GB 2 rank 2400 MHz  
8x Not Specified Not Specified
```

```
(End of data from sysinfo program)
```

General Notes

Environment variables set by runspec before the start of the run:

LD_LIBRARY_PATH = "/root/cpu2006-1.2/libs/32:/root/cpu2006-1.2/libs/64:/root/cpu2006-1.2/sh"

Binaries compiled on a system with 1x Intel Core i5-4670K CPU + 32GB
memory using RedHat EL 7.1

Transparent Huge Pages enabled with:

```
echo always > /sys/kernel/mm/transparent_hugepage/enabled
```

Filesystem page cache cleared with:

```
echo 1> /proc/sys/vm/drop_caches
```

runspec command invoked through numactl i.e.:

```
numactl --interleave=all runspec <etc>
```

Base Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks:

```
icpc -m64
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = Not Run

PowerEdge R630 (Intel Xeon E5-2699A v4, 2.40 GHz)

SPECfp_rate_base2006 = 1090

CPU2006 license: 55

Test date: Sep-2016

Test sponsor: Dell Inc.

Hardware Availability: Oct-2016

Tested by: Dell Inc.

Software Availability: Jun-2016

Base Compiler Invocation (Continued)

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

Fortran benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

Benchmarks using both Fortran and C:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = Not Run

PowerEdge R630 (Intel Xeon E5-2699A v4, 2.40 GHz)

SPECfp_rate_base2006 = 1090

CPU2006 license: 55

Test date: Sep-2016

Test sponsor: Dell Inc.

Hardware Availability: Oct-2016

Tested by: Dell Inc.

Software Availability: Jun-2016

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revD.20151006.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revD.20151006.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Wed Nov 9 15:40:55 2016 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 24 October 2016.