



# SPEC® CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS B420 M4 (Intel Xeon E5-4650 v4, 2.20 GHz)

**SPECint®\_rate2006 = 2290**

**SPECint\_rate\_base2006 = 2190**

CPU2006 license: 9019


Test sponsor: Cisco Systems

Tested by: Cisco Systems

Test date: Nov-2016

Hardware Availability: Jun-2016

Software Availability: Dec-2015

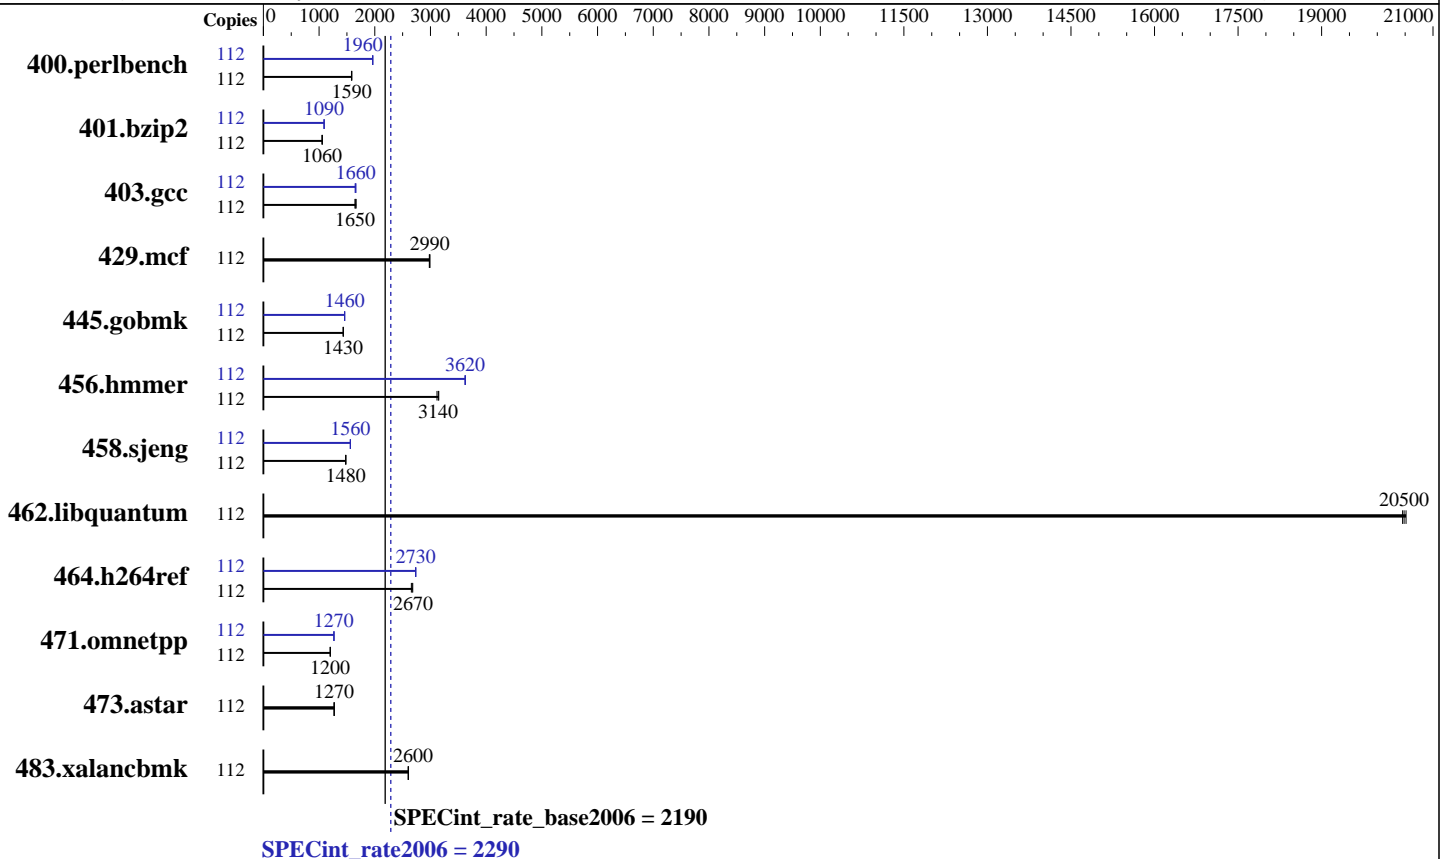

### Hardware

CPU Name: Intel Xeon E5-4650 v4  
 CPU Characteristics: Intel Turbo Boost Technology up to 2.80 GHz  
 CPU MHz: 2200  
 FPU: Integrated  
 CPU(s) enabled: 56 cores, 4 chips, 14 cores/chip, 2 threads/core  
 CPU(s) orderable: 2,4 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 35 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 1 TB (32 x 32 GB 2Rx4 PC4-2400T-R)  
 Disk Subsystem: 1 x 300 GB SAS, 15K RPM  
 Other Hardware: None

### Software

Operating System: SUSE Linux Enterprise Server 12 SP1 (x86\_64) 3.12.49-11-default  
 Compiler: C/C++; Version 16.0.0.101 of Intel C++ Studio XE for Linux  
 Auto Parallel: No  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V10.2



# SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS B420 M4 (Intel Xeon E5-4650 v4, 2.20 GHz)

SPECint\_rate2006 = 2290

SPECint\_rate\_base2006 = 2190

CPU2006 license: 9019  
Test sponsor: Cisco Systems  
Tested by: Cisco Systems

Test date: Nov-2016  
Hardware Availability: Jun-2016  
Software Availability: Dec-2015

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	112	689	1590	<b>690</b>	<b>1590</b>	692	1580	112	557	1960	558	1960	<b>557</b>	<b>1960</b>
401.bzip2	112	1028	1050	<b>1022</b>	<b>1060</b>	1021	1060	112	<b>991</b>	<b>1090</b>	990	1090	992	1090
403.gcc	112	548	1650	<b>546</b>	<b>1650</b>	541	1670	112	547	1650	<b>544</b>	<b>1660</b>	543	1660
429.mcf	112	343	2980	342	2990	<b>342</b>	<b>2990</b>	112	343	2980	342	2990	<b>342</b>	<b>2990</b>
445.gobmk	112	<b>819</b>	<b>1430</b>	819	1430	819	1430	112	805	1460	806	1460	<b>805</b>	<b>1460</b>
456.hammer	112	335	3120	<b>333</b>	<b>3140</b>	332	3150	112	288	3630	289	3620	<b>288</b>	<b>3620</b>
458.sjeng	112	<b>916</b>	<b>1480</b>	916	1480	917	1480	112	<b>868</b>	<b>1560</b>	868	1560	868	1560
462.libquantum	112	113	20500	<b>113</b>	<b>20500</b>	113	20500	112	113	20500	<b>113</b>	<b>20500</b>	113	20500
464.h264ref	112	933	2660	924	2680	<b>928</b>	<b>2670</b>	112	<b>906</b>	<b>2730</b>	905	2740	907	2730
471.omnetpp	112	<b>583</b>	<b>1200</b>	583	1200	583	1200	112	<b>552</b>	<b>1270</b>	552	1270	553	1270
473.astar	112	<b>618</b>	<b>1270</b>	618	1270	619	1270	112	<b>618</b>	<b>1270</b>	618	1270	619	1270
483.xalancbmk	112	<b>297</b>	<b>2600</b>	297	2600	297	2610	112	<b>297</b>	<b>2600</b>	297	2600	297	2610

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

### BIOS Settings:

CPU performance set to Enterprise  
Power Technology set to Energy Efficient  
Energy Performance set to Balanced Performance  
Memory RAS configuration set to Maximum Performance  
Memory Power Saving Mode set to Disabled  
QPI Snoop Mode set to Cluster-on-Die  
Sysinfo program /home/cpu2006-1.2/config/sysinfo.rev6914  
\$Rev: 6914 \$ \$Date:: 2014-06-25 #\$ e3fbb8667b5a285932ceab81e28219e1  
running on linux-me8v Sat Nov 12 11:53:28 2016

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo  
model name : Intel(R) Xeon(R) CPU E5-4650 v4 @ 2.20GHz  
Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS B420 M4 (Intel Xeon E5-4650 v4, 2.20 GHz)

SPECint\_rate2006 = 2290

SPECint\_rate\_base2006 = 2190

**CPU2006 license:** 9019  
**Test sponsor:** Cisco Systems  
**Tested by:** Cisco Systems

**Test date:** Nov-2016  
**Hardware Availability:** Jun-2016  
**Software Availability:** Dec-2015

### Platform Notes (Continued)

```

4 "physical id"s (chips)
112 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
cpu cores : 14
siblings  : 28
physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14
physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14
physical 2: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14
physical 3: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14
cache size : 17920 KB

```

```

From /proc/meminfo
MemTotal:      1058689056 kB
HugePages_Total:       0
Hugepagesize:   2048 kB

```

```

/usr/bin/lsb_release -d
SUSE Linux Enterprise Server 12 SP1

```

```

From /etc/*release* /etc/*version*
SuSE-release:
SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 1
# This file is deprecated and will be removed in a future service pack or
release.
# Please check /etc/os-release for details about this release.
os-release:
NAME="SLES"
VERSION="12-SP1"
VERSION_ID="12.1"
PRETTY_NAME="SUSE Linux Enterprise Server 12 SP1"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12:sp1"

```

```

uname -a:
Linux linux-me8v 3.12.49-11-default #1 SMP Wed Nov 11 20:52:43 UTC 2015
(8d714a0) x86_64 x86_64 x86_64 GNU/Linux

```

run-level 3 Nov 12 11:52

```

SPEC is set to: /home/cpu2006-1.2
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sdb7        xfs   236G  7.4G  229G   4% /home

```

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS B420 M4 (Intel Xeon E5-4650 v4, 2.20 GHz)

SPECint\_rate2006 = 2290

SPECint\_rate\_base2006 = 2190

**CPU2006 license:** 9019  
**Test sponsor:** Cisco Systems  
**Tested by:** Cisco Systems

**Test date:** Nov-2016  
**Hardware Availability:** Jun-2016  
**Software Availability:** Dec-2015

### Platform Notes (Continued)

hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS Cisco Systems, Inc. B420M4.3.1.2.0.052320161053 05/23/2016

Memory:

32x 0xCE00 M393A4K40BB1-CRC 32 GB 2 rank 2400 MHz  
16x NO DIMM NO DIMM

(End of data from sysinfo program)

### General Notes

Environment variables set by runspec before the start of the run:

LD\_LIBRARY\_PATH = "/home/cpu2006-1.2/libs/32:/home/cpu2006-1.2/libs/64:/home/cpu2006-1.2/sh"

Binaries compiled on a system with 1x Intel Core i5-4670K CPU + 32GB memory using RedHat EL 7.1

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/transparent\_hugepage/enabled

Filesystem page cache cleared with:

echo 1> /proc/sys/vm/drop\_caches

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

### Base Compiler Invocation

C benchmarks:

icc -m32 -L/opt/intel/compilers\_and\_libraries\_2016/linux/compiler/lib/ia32\_lin

C++ benchmarks:

icpc -m32 -L/opt/intel/compilers\_and\_libraries\_2016/linux/compiler/lib/ia32\_lin

### Base Portability Flags

400.perlbench: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LINUX\_IA32  
401.bzip2: -D\_FILE\_OFFSET\_BITS=64  
403.gcc: -D\_FILE\_OFFSET\_BITS=64  
429.mcf: -D\_FILE\_OFFSET\_BITS=64  
445.gobmk: -D\_FILE\_OFFSET\_BITS=64  
456.hmmer: -D\_FILE\_OFFSET\_BITS=64  
458.sjeng: -D\_FILE\_OFFSET\_BITS=64  
462.libquantum: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LINUX  
464.h264ref: -D\_FILE\_OFFSET\_BITS=64  
471.omnetpp: -D\_FILE\_OFFSET\_BITS=64  
473.astar: -D\_FILE\_OFFSET\_BITS=64  
483.xalanbmk: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LINUX



# SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS B420 M4 (Intel Xeon E5-4650 v4, 2.20 GHz)

**SPECint\_rate2006 = 2290**

**SPECint\_rate\_base2006 = 2190**

**CPU2006 license:** 9019

**Test sponsor:** Cisco Systems

**Tested by:** Cisco Systems

**Test date:** Nov-2016

**Hardware Availability:** Jun-2016

**Software Availability:** Dec-2015

## Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch  
-opt-mem-layout-trans=3

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch  
-opt-mem-layout-trans=3 -Wl,-z,muldefs -L/sh -lsmartheap

## Base Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m32 -L/opt/intel/compilers\_and\_libraries\_2016/linux/compiler/lib/ia32\_lin

400.perlbench: icc -m64

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

C++ benchmarks:

icpc -m32 -L/opt/intel/compilers\_and\_libraries\_2016/linux/compiler/lib/ia32\_lin

## Peak Portability Flags

400.perlbench: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64

401.bzip2: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LP64

403.gcc: -D\_FILE\_OFFSET\_BITS=64

429.mcf: -D\_FILE\_OFFSET\_BITS=64

445.gobmk: -D\_FILE\_OFFSET\_BITS=64

456.hmmer: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LP64

458.sjeng: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LP64

462.libquantum: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LINUX

464.h264ref: -D\_FILE\_OFFSET\_BITS=64

471.omnetpp: -D\_FILE\_OFFSET\_BITS=64

473.astar: -D\_FILE\_OFFSET\_BITS=64

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/



# SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS B420 M4 (Intel Xeon E5-4650 v4, 2.20 GHz)

SPECint\_rate2006 = 2290

SPECint\_rate\_base2006 = 2190

CPU2006 license: 9019

Test sponsor: Cisco Systems

Tested by: Cisco Systems

Test date: Nov-2016

Hardware Availability: Jun-2016

Software Availability: Dec-2015

## Peak Portability Flags (Continued)

483.xalanbmk: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -auto-ilp32

401.bzip2: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -opt-prefetch  
-auto-ilp32 -ansi-alias

403.gcc: -xCORE-AVX2 -ipo -O3 -no-prec-div

429.mcf: basepeak = yes

445.gobmk: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-prof-use(pass 2) -par-num-threads=1(pass 1) -ansi-alias  
-opt-mem-layout-trans=3

456.hmmer: -xCORE-AVX2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32

458.sjeng: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll4  
-auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll2  
-ansi-alias

C++ benchmarks:

471.omnetpp: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -ansi-alias  
-opt-ra-region-strategy=block -Wl,-z,muldefs  
-L/sh -lsmartheap

473.astar: basepeak = yes

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS B420 M4 (Intel Xeon E5-4650 v4, 2.20 GHz)

SPECint\_rate2006 = 2290

SPECint\_rate\_base2006 = 2190

CPU2006 license: 9019

Test sponsor: Cisco Systems

Tested by: Cisco Systems

Test date: Nov-2016

Hardware Availability: Jun-2016

Software Availability: Dec-2015

## Peak Optimization Flags (Continued)

483.xalanbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Cisco-Platform-Settings-V1.2-revE.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Cisco-Platform-Settings-V1.2-revE.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Tue Nov 29 19:08:00 2016 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 29 November 2016.