



# SPEC® CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Huawei

**SPECfp®\_rate2006 = 450**

Huawei XH628 V3 (Intel Xeon E5-2637 v4)

**SPECfp\_rate\_base2006 = 444**

CPU2006 license: 3175


Test date: Nov-2016

Test sponsor: Huawei

Hardware Availability: Mar-2016

Tested by: Huawei

Software Availability: Dec-2015

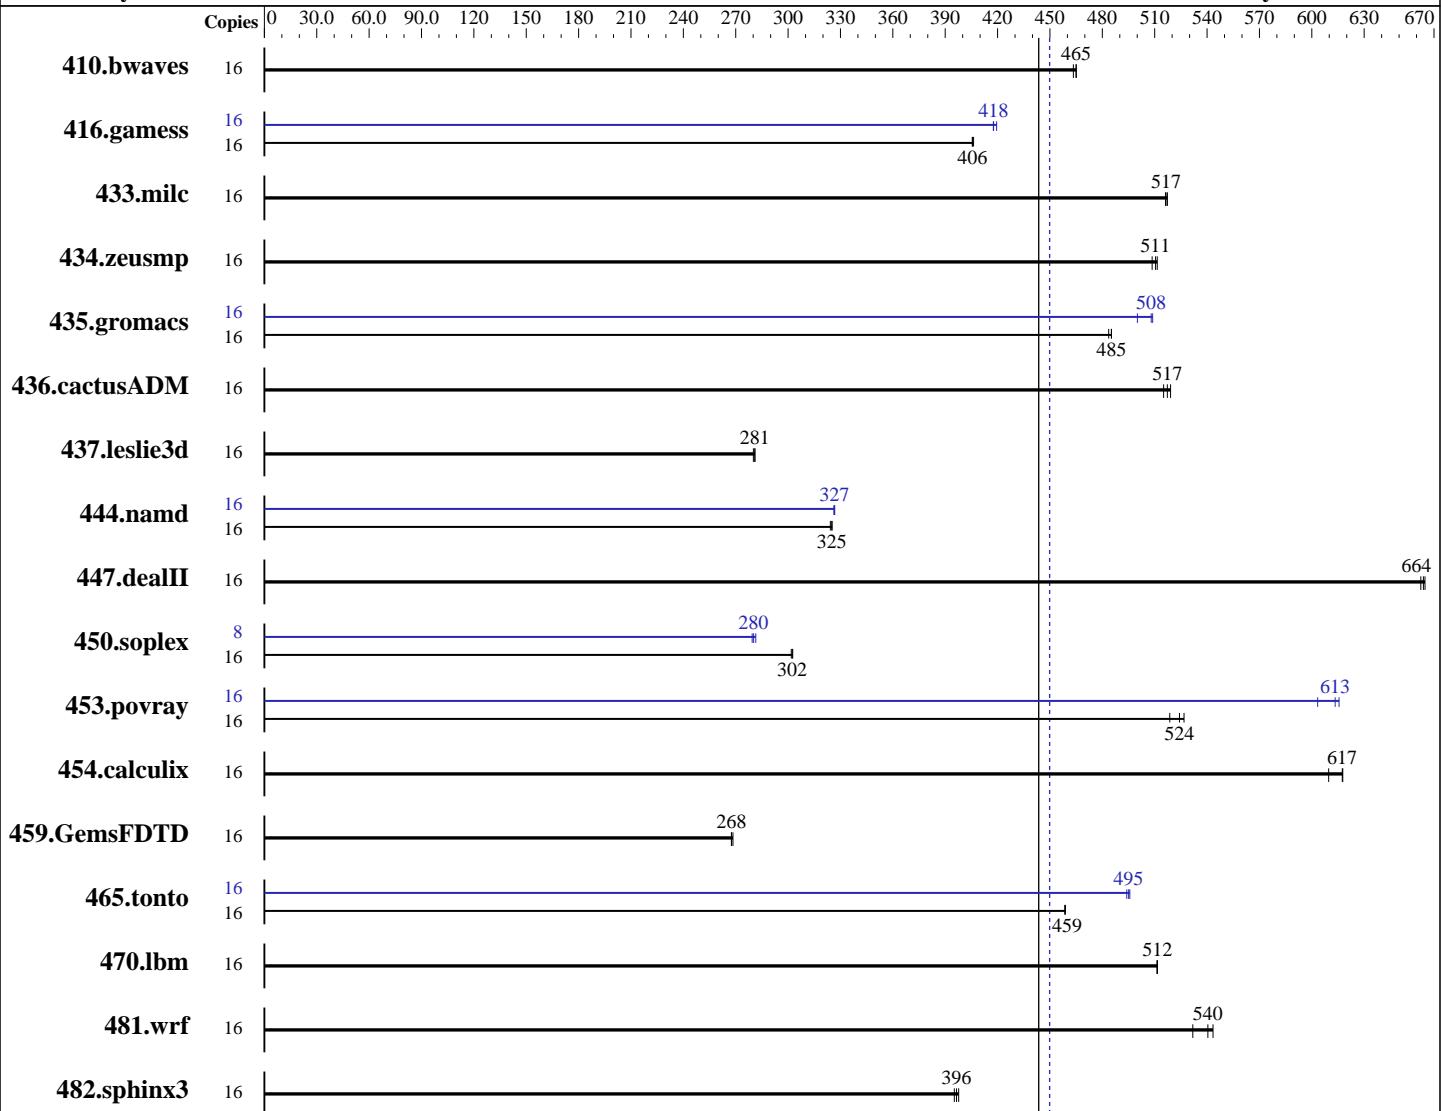

**SPECfp\_rate\_base2006 = 444**

**SPECfp\_rate2006 = 450**

## Hardware

CPU Name: Intel Xeon E5-2637 v4  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.70 GHz  
 CPU MHz: 3500  
 FPU: Integrated  
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

## Software

Operating System: SUSE Linux Enterprise Server 12 SP1 (x86\_64)  
 3.12.49-11-default  
 Compiler: C/C++: Version 16.0.0.101 of Intel C++ Studio XE  
 for Linux;  
 Fortran: Version 16.0.0.101 of Intel Fortran  
 Studio XE for Linux  
 Auto Parallel: No  
 File System: ext4  
 System State: Run level 3 (multi-user)

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

**Huawei**

**SPECfp\_rate2006 = 450**

**Huawei XH628 V3 (Intel Xeon E5-2637 v4)**

**SPECfp\_rate\_base2006 = 444**

**CPU2006 license:** 3175

**Test date:** Nov-2016

**Test sponsor:** Huawei

**Hardware Availability:** Mar-2016

**Tested by:** Huawei

**Software Availability:** Dec-2015

L3 Cache: 15 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 256 GB (16 x 16 GB 2Rx8 PC4-2400T-R)  
 Disk Subsystem: 1 x 2000 GB SATA, 7200 RPM  
 Other Hardware: None

Base Pointers: 32/64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	16	468	465	469	463	<b>468</b>	<b>465</b>	16	468	465	469	463	<b>468</b>	<b>465</b>
416.gamess	16	<b>772</b>	<b>406</b>	772	406	771	406	16	<b>750</b>	<b>418</b>	750	418	<b>747</b>	419
433.milc	16	<b>284</b>	<b>517</b>	284	517	285	516	16	<b>284</b>	<b>517</b>	284	517	<b>285</b>	516
434.zeusmp	16	<b>285</b>	<b>511</b>	285	511	286	509	16	<b>285</b>	<b>511</b>	285	511	<b>286</b>	509
435.gromacs	16	236	484	235	485	<b>235</b>	<b>485</b>	16	<b>225</b>	<b>508</b>	228	500	225	509
436.cactusADM	16	371	515	<b>370</b>	<b>517</b>	368	519	16	371	515	<b>370</b>	<b>517</b>	368	519
437.leslie3d	16	537	280	535	281	<b>535</b>	<b>281</b>	16	537	280	535	281	<b>535</b>	281
444.namd	16	<b>395</b>	<b>325</b>	395	325	396	324	16	393	326	<b>393</b>	<b>327</b>	393	327
447.dealII	16	<b>276</b>	<b>664</b>	276	662	275	665	16	<b>276</b>	<b>664</b>	276	662	<b>275</b>	665
450.soplex	16	442	302	<b>441</b>	<b>302</b>	441	303	8	<b>237</b>	281	<b>238</b>	<b>280</b>	239	279
453.povray	16	164	519	<b>162</b>	<b>524</b>	162	527	16	141	603	<b>139</b>	<b>613</b>	138	616
454.calculix	16	<b>214</b>	<b>617</b>	217	610	214	618	16	<b>214</b>	<b>617</b>	217	610	214	618
459.GemsFDTD	16	<b>634</b>	<b>268</b>	632	268	635	268	16	<b>634</b>	<b>268</b>	632	268	635	268
465.tonto	16	343	459	<b>343</b>	<b>459</b>	343	459	16	318	496	<b>318</b>	<b>495</b>	319	494
470.lbm	16	430	512	<b>430</b>	<b>512</b>	430	511	16	430	512	<b>430</b>	<b>512</b>	430	511
481.wrf	16	<b>331</b>	<b>540</b>	336	532	329	543	16	<b>331</b>	<b>540</b>	336	532	329	543
482.sphinx3	16	784	398	<b>787</b>	<b>396</b>	789	395	16	<b>784</b>	398	<b>787</b>	<b>396</b>	789	395

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS configuration:  
 Set Power Efficiency Mode to Performance  
 Set Snoop Mode to COD mode

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Huawei

**SPECfp\_rate2006 = 450**

Huawei XH628 V3 (Intel Xeon E5-2637 v4)

**SPECfp\_rate\_base2006 = 444**

CPU2006 license: 3175

Test date: Nov-2016

Test sponsor: Huawei

Hardware Availability: Mar-2016

Tested by: Huawei

Software Availability: Dec-2015

## Platform Notes (Continued)

```
Set Patrol Scrub to Disable
Sysinfo program /spec16/config/sysinfo.rev6914
$Rev: 6914 $ $Date:: 2014-06-25 #\$ e3fbb8667b5a285932ceab81e28219e1
running on linux-29n0 Tue Nov  8 08:58:33 2016
```

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-2637 v4 @ 3.50GHz
        2 "physical id"s (chips)
        16 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
        cpu cores : 4
        siblings : 8
        physical 0: cores 0 1 2 3
        physical 1: cores 0 1 2 3
cache size : 15360 KB
```

```
From /proc/meminfo
MemTotal:      264273192 kB
HugePages_Total:      0
Hugepagesize:     2048 kB
```

```
From /etc/*release* /etc/*version*
SuSE-release:
        SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 1
# This file is deprecated and will be removed in a future service pack or
release.
# Please check /etc/os-release for details about this release.
os-release:
NAME="SLES"
VERSION="12-SP1"
VERSION_ID="12.1"
PRETTY_NAME="SUSE Linux Enterprise Server 12 SP1"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12:sp1"
```

```
uname -a:
Linux linux-29n0 3.12.49-11-default #1 SMP Wed Nov 11 20:52:43 UTC 2015
(8d714a0) x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Nov 7 22:23
```

```
SPEC is set to: /spec16
Filesystem      Type  Size  Used Avail Use% Mounted on
Continued on next page
```



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Huawei

Huawei XH628 V3 (Intel Xeon E5-2637 v4)

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

**SPECfp\_rate2006 = 450**

**SPECfp\_rate\_base2006 = 444**

Test date: Nov-2016

Hardware Availability: Mar-2016

Software Availability: Dec-2015

## Platform Notes (Continued)

/dev/sdal ext4 1.8T 32G 1.8T 2% /  
Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS Insyde Corp. 3.31 08/22/2016  
Memory:  
16x Micron 18ASF2G72PDZ-2G3B1 16 GB 2 rank 2400 MHz

(End of data from sysinfo program)

## General Notes

Environment variables set by runspec before the start of the run:  
LD\_LIBRARY\_PATH = "/spec16/libs/32:/spec16/libs/64:/spec16/sh"

Binaries compiled on a system with 1x Intel Core i5-4670K CPU + 32GB memory using RedHat EL 7.1  
Transparent Huge Pages enabled with:  
echo always > /sys/kernel/mm/transparent\_hugepage/enabled  
Filesystem page cache cleared with:  
echo 1> /proc/sys/vm/drop\_caches  
runspec command invoked through numactl i.e.:  
numactl --interleave=all runspec <etc>  
The Huawei XH622 V3 and Huawei XH628 V3 and Huawei XH620 V3 are electronically equivalent.  
The results have been measured on a Huawei XH620 V3 model

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Huawei

Huawei XH628 V3 (Intel Xeon E5-2637 v4)

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

**SPECfp\_rate2006 = 450**

**SPECfp\_rate\_base2006 = 444**

Test date: Nov-2016

Hardware Availability: Mar-2016

Software Availability: Dec-2015

## Base Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
    433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
    444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
    470.lbm: -DSPEC_CPU_LP64
    481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64
```

## Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3
```

C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3
```

Fortran benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
```

Benchmarks using both Fortran and C:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3
```

## Peak Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks (except as noted below):

```
icpc -m64
```

```
450.soplex: icpc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin
```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Huawei

Huawei XH628 V3 (Intel Xeon E5-2637 v4)

**SPECfp\_rate2006 = 450**

CPU2006 license: 3175

Test date: Nov-2016

Test sponsor: Huawei

Hardware Availability: Mar-2016

Tested by: Huawei

Software Availability: Dec-2015

## Peak Compiler Invocation (Continued)

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Peak Portability Flags

```

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
    433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
    437.leslie3d: -DSPEC_CPU_LP64
    444.namd: -DSPEC_CPU_LP64
    447.dealII: -DSPEC_CPU_LP64
450.soplex: -D_FILE_OFFSET_BITS=64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
    465.tonto: -DSPEC_CPU_LP64
    470.lbm: -DSPEC_CPU_LP64
    481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

## Peak Optimization Flags

C benchmarks:

```

433.milc: basepeak = yes
470.lbm: basepeak = yes
482.sphinx3: basepeak = yes

```

C++ benchmarks:

```

444.namd: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
    -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
    -par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)
    -prof-use(pass 2) -fno-alias -auto-ilp32

```

447.dealII: basepeak = yes

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Huawei

Huawei XH628 V3 (Intel Xeon E5-2637 v4)

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

SPECfp\_rate2006 = 450

SPECfp\_rate\_base2006 = 444

Test date: Nov-2016

Hardware Availability: Mar-2016

Software Availability: Dec-2015

## Peak Optimization Flags (Continued)

450.soplex: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)  
-prof-use(pass 2) -opt-malloc-options=3

453.povray: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)  
-prof-use(pass 2) -unroll14 -ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll12  
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: basepeak = yes

465.tonto: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll14 -auto  
-inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)  
-prof-use(pass 2) -opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-BDW-V1.0.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-BDW-V1.0.xml>



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Huawei

**SPECfp\_rate2006 = 450**

Huawei XH628 V3 (Intel Xeon E5-2637 v4)

**SPECfp\_rate\_base2006 = 444**

**CPU2006 license:** 3175

**Test date:** Nov-2016

**Test sponsor:** Huawei

**Hardware Availability:** Mar-2016

**Tested by:** Huawei

**Software Availability:** Dec-2015

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Dec 15 11:16:12 2016 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 13 December 2016.