



SPEC[®] CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Inspur Corporation

SPECfp[®]_rate2006 = 713

Inspur NF5280M4 (Intel Xeon E5-2640 v4)

SPECfp_rate_base2006 = 698

CPU2006 license: 3358


Test date: Jun-2017

Test sponsor: Inspur Corporation

Hardware Availability: Apr-2016

Tested by: Inspur Corporation

Software Availability: Apr-2017

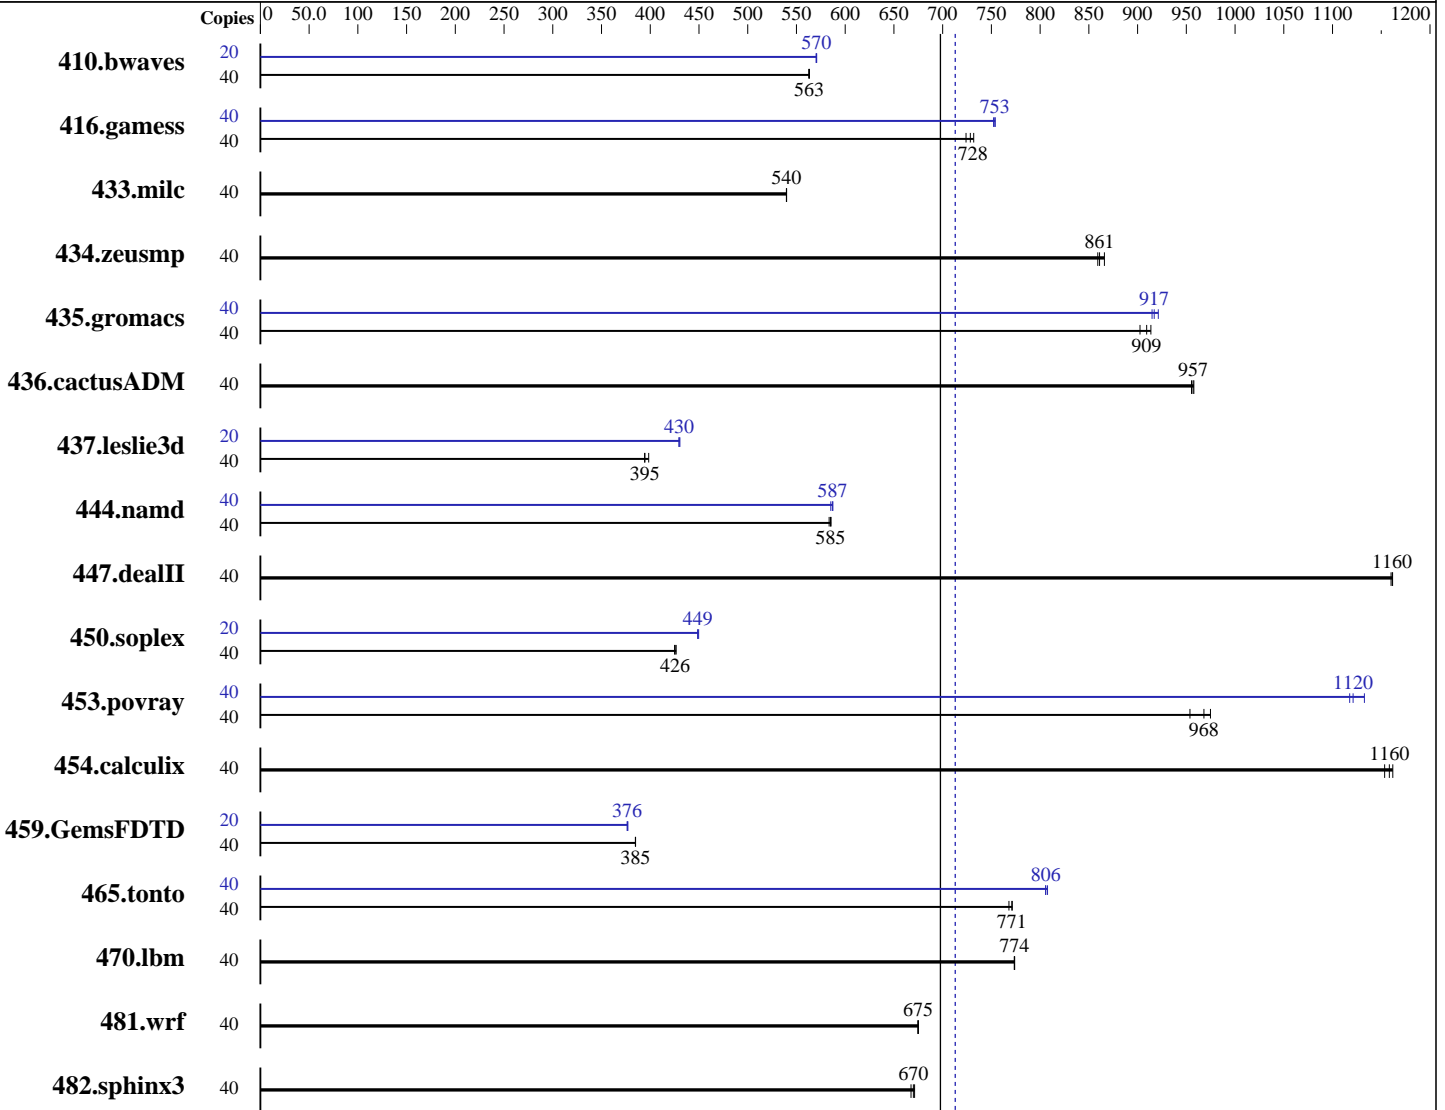

SPECfp_rate_base2006 = 698

SPECfp_rate2006 = 713

Hardware

CPU Name: Intel Xeon E5-2640 v4
 CPU Characteristics: Intel Turbo Boost Technology up to 3.40 GHz
 CPU MHz: 2400
 FPU: Integrated
 CPU(s) enabled: 20 cores, 2 chips, 10 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: Red Hat Enterprise Linux Server release 7.3 (Maipo)
 3.10.0-514.el7.x86_64
 Compiler: C/C++: Version 17.0.3.191 of Intel C/C++ Compiler for Linux;
 Fortran: Version 17.0.3.191 of Intel Fortran Compiler for Linux
 Auto Parallel: Yes
 File System: xfs

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Inspur Corporation

SPECfp_rate2006 = **713**

Inspur NF5280M4 (Intel Xeon E5-2640 v4)

SPECfp_rate_base2006 = **698**

CPU2006 license: 3358

Test sponsor: Inspur Corporation

Tested by: Inspur Corporation

Test date: Jun-2017

Hardware Availability: Apr-2016

Software Availability: Apr-2017

L3 Cache: 25 MB I+D on chip per chip
 Other Cache: None
 Memory: 256 GB (16 x 16 GB 2Rx4 PC4-2400T-R, running at 2133 MHz)
 Disk Subsystem: 1 x 900 GB SATA SSD
 Other Hardware: None

System State: Run level 5 (multi-user)
 Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: None

Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio		
410.bwaves	40	965	563	966	563	966	563	20	476	571	476	570	477	570		
416.gamess	40	1070	732	1075	728	1082	724	40	1041	752	1039	753	1039	754		
433.milc	40	680	540	680	540	680	540	40	680	540	680	540	680	540		
434.zeusmp	40	420	866	424	859	423	861	40	420	866	424	859	423	861		
435.gromacs	40	313	914	316	902	314	909	40	311	917	310	921	312	915		
436.cactusADM	40	500	957	499	958	500	955	40	500	957	499	958	500	955		
437.leslie3d	40	944	398	953	395	954	394	20	438	430	437	430	438	429		
444.namd	40	548	586	548	585	550	584	40	547	587	546	587	548	585		
447.dealII	40	394	1160	394	1160	394	1160	40	394	1160	394	1160	394	1160		
450.soplex	40	785	425	782	427	784	426	20	372	449	372	449	371	450		
453.povray	40	220	968	223	954	218	975	40	188	1130	190	1120	190	1120		
454.calculix	40	286	1150	285	1160	284	1160	40	286	1150	285	1160	284	1160		
459.GemsFDTD	40	1102	385	1103	385	1103	385	20	563	377	564	376	564	376		
465.tonto	40	511	771	510	771	513	768	40	487	808	489	806	489	806		
470.lbm	40	711	773	710	774	710	774	40	711	773	710	774	710	774		
481.wrf	40	662	675	662	675	662	675	40	662	675	662	675	662	675		
482.sphinx3	40	1164	670	1162	671	1168	668	40	1164	670	1162	671	1168	668		

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

BIOS and OS configuration:
SCALING_GOVERNOR set to Performance
Hardware Prefetch set to Disable

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Inspur Corporation

SPECfp_rate2006 = 713

Inspur NF5280M4 (Intel Xeon E5-2640 v4)

SPECfp_rate_base2006 = 698

CPU2006 license: 3358

Test sponsor: Inspur Corporation

Tested by: Inspur Corporation

Test date: Jun-2017

Hardware Availability: Apr-2016

Software Availability: Apr-2017

Platform Notes (Continued)

VT Support set to Disable
 ClE Support set to Disable
 Sysinfo program /home/CPU2006/config/sysinfo.rev6993
 Revision 6993 of 2015-11-06 (b5e8d4b4eb51ed28d7f98696cbe290c1)
 running on localhost.localdomain Fri Jun 30 14:00:10 2017

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see: <http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name      : Intel(R) Xeon(R) CPU E5-2640 v4 @ 2.40GHz
 2 "physical id"s (chips)
 40 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
  cpu cores    : 10
  siblings     : 20
  physical 0: cores 0 1 2 3 4 8 9 10 11 12
  physical 1: cores 0 1 2 3 4 8 9 10 11 12
cache size     : 25600 KB
```

```
From /proc/meminfo
MemTotal:      263850628 kB
HugePages_Total: 0
Hugepagesize:  2048 kB
```

```
From /etc/*release* /etc/*version*
os-release:
NAME="Red Hat Enterprise Linux Server"
VERSION="7.3 (Maipo)"
ID="rhel"
ID_LIKE="fedora"
VERSION_ID="7.3"
PRETTY_NAME="Red Hat Enterprise Linux Server 7.3 (Maipo)"
ANSI_COLOR="0;31"
CPE_NAME="cpe:/o:redhat:enterprise_linux:7.3:GA:server"
redhat-release: Red Hat Enterprise Linux Server release 7.3 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.3 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.3:ga:server
```

```
uname -a:
Linux localhost.localdomain 3.10.0-514.el7.x86_64 #1 SMP Wed Oct 19 11:24:13 EDT 2016 x86_64 x86_64 x86_64 GNU/Linux
```

run-level 5 Jun 28 04:15

```
SPEC is set to: /home/CPU2006
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/mapper/rhel-home xfs  877G  78G  799G   9% /home
```

Additional information from dmidecode:

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Inspur Corporation

SPECfp_rate2006 = 713

Inspur NF5280M4 (Intel Xeon E5-2640 v4)

SPECfp_rate_base2006 = 698

CPU2006 license: 3358

Test sponsor: Inspur Corporation

Tested by: Inspur Corporation

Test date: Jun-2017

Hardware Availability: Apr-2016

Software Availability: Apr-2017

Platform Notes (Continued)

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS American Megatrends Inc. 4.1.11 09/07/2016

Memory:

8x NO DIMM NO DIMM

16x Samsung M393A2K43BB1-CNC 16 GB 2 rank 2400 MHz, configured at 2133 MHz

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:

LD_LIBRARY_PATH = "/home/CPU2006/lib/ia32:/home/CPU2006/lib/intel64:/home/CPU2006/sh10.2"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM memory using Redhat Enterprise Linux 7.2

Transparent Huge Pages enabled by default

Filesystem page cache cleared with:

shell invocation of 'sync; echo 3 > /proc/sys/vm/drop_caches' prior to run

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64

416.gamess: -DSPEC_CPU_LP64

433.milc: -DSPEC_CPU_LP64

434.zeusmp: -DSPEC_CPU_LP64

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/

Page 4



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Inspur Corporation

SPECfp_rate2006 = 713

Inspur NF5280M4 (Intel Xeon E5-2640 v4)

SPECfp_rate_base2006 = 698

CPU2006 license: 3358

Test date: Jun-2017

Test sponsor: Inspur Corporation

Hardware Availability: Apr-2016

Tested by: Inspur Corporation

Software Availability: Apr-2017

Base Portability Flags (Continued)

```

435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

Base Optimization Flags

C benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32
-qopt-mem-layout-trans=3

```

C++ benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32
-qopt-mem-layout-trans=3

```

Fortran benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch

```

Benchmarks using both Fortran and C:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32
-qopt-mem-layout-trans=3

```

Peak Compiler Invocation

C benchmarks:

```

icc -m64

```

C++ benchmarks (except as noted below):

```

icpc -m64

```

```

450.soplex: icpc -m32 -L/opt/intel/compilers_and_libraries_2017/linux/lib/ia32

```

Fortran benchmarks:

```

ifort -m64

```

Benchmarks using both Fortran and C:

```

icc -m64 ifort -m64

```



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Inspur Corporation

SPECfp_rate2006 = 713

Inspur NF5280M4 (Intel Xeon E5-2640 v4)

SPECfp_rate_base2006 = 698

CPU2006 license: 3358

Test date: Jun-2017

Test sponsor: Inspur Corporation

Hardware Availability: Apr-2016

Tested by: Inspur Corporation

Software Availability: Apr-2017

Peak Portability Flags

```

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -D_FILE_OFFSET_BITS=64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

```

444.namd: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
         -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
         -no-prec-div(pass 2) -fno-alias -auto-ilp32
         -qopt-mem-layout-trans=3

```

447.dealII: basepeak = yes

```

450.soplex: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
           -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
           -no-prec-div(pass 2) -qopt-malloc-options=3
           -qopt-mem-layout-trans=3

```

```

453.povray: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
           -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
           -no-prec-div(pass 2) -unroll4 -qopt-mem-layout-trans=3

```

Fortran benchmarks:

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Inspur Corporation

SPECfp_rate2006 = 713

Inspur NF5280M4 (Intel Xeon E5-2640 v4)

SPECfp_rate_base2006 = 698

CPU2006 license: 3358

Test sponsor: Inspur Corporation

Tested by: Inspur Corporation

Test date: Jun-2017

Hardware Availability: Apr-2016

Software Availability: Apr-2017

Peak Optimization Flags (Continued)

410.bwaves: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch

416.gamess: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -unroll2 -inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: Same as 410.bwaves

459.GemsFDTD: Same as 410.bwaves

465.tonto: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -unroll4 -auto -inline-calloc
-qopt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
-par-num-threads=1(pass 1) -qopt-prefetch -auto-ilp32
-qopt-mem-layout-trans=3

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.html>

<http://www.spec.org/cpu2006/flags/Inspur-Platform-Settings-V1.0-HSW.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.xml>

<http://www.spec.org/cpu2006/flags/Inspur-Platform-Settings-V1.0-HSW.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Tue Jul 25 15:52:28 2017 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 25 July 2017.