



SPEC® CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECfp®_rate2006 = 213

Lenovo ThinkServer RS160
(3.70 GHz, Intel Xeon E3-1240 v6)

SPECfp_rate_base2006 = 205

CPU2006 license: 9017


Test date: Aug-2017

Test sponsor: Lenovo Global Technology

Hardware Availability: Jun-2017

Tested by: Lenovo Global Technology

Software Availability: Nov-2016

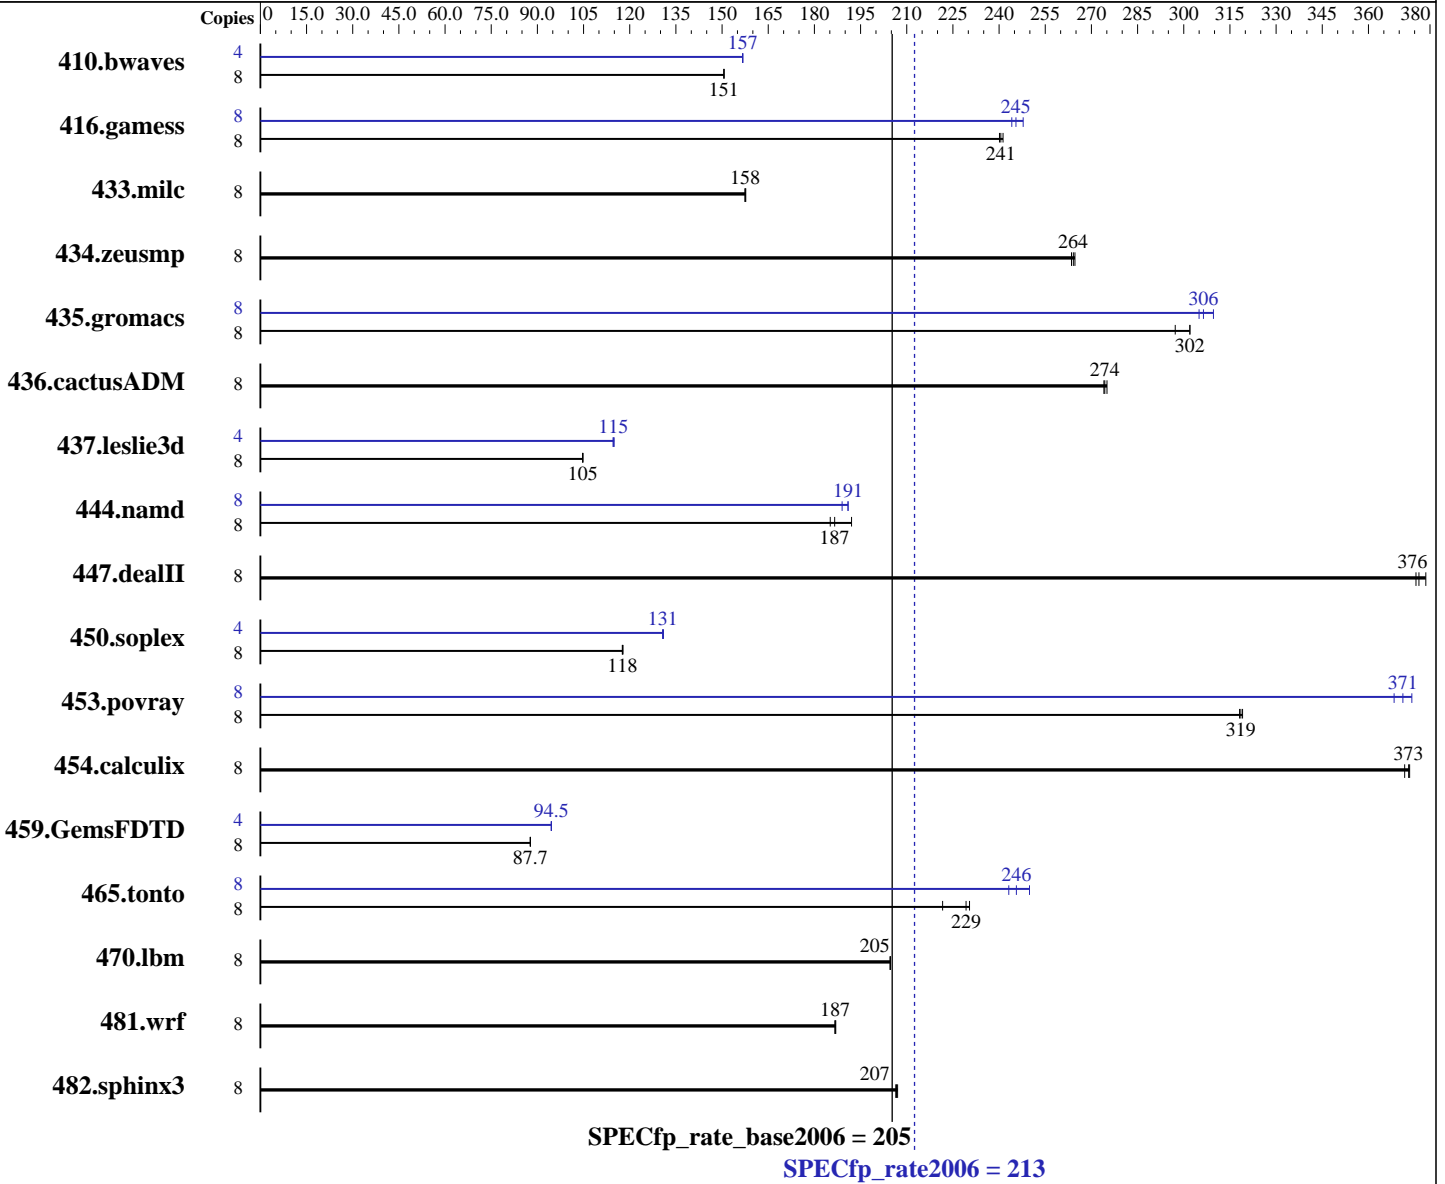

Hardware

CPU Name: Intel Xeon E3-1240 v6
 CPU Characteristics: Intel Turbo Boost Technology up to 4.10 GHz
 CPU MHz: 3700
 FPU: Integrated
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip, 2 threads/core
 CPU(s) orderable: 1 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: SUSE Linux Enterprise Server 12 SP2 (x86_64)
 Kernel 4.4.21-69-default
 Compiler: C/C++: Version 17.0.0.098 of Intel C/C++ Compiler for Linux;
 Fortran: Version 17.0.0.098 of Intel Fortran Compiler for Linux
 Auto Parallel: No
 File System: btrfs
 System State: Run level 3 (multi-user)

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECfp_rate2006 = 213

Lenovo ThinkServer RS160
(3.70 GHz, Intel Xeon E3-1240 v6)

SPECfp_rate_base2006 = 205

CPU2006 license: 9017

Test date: Aug-2017

Test sponsor: Lenovo Global Technology

Hardware Availability: Jun-2017

Tested by: Lenovo Global Technology

Software Availability: Nov-2016

L3 Cache: 8 MB I+D on chip per chip
Other Cache: None
Memory: 32 GB (2 x 16 GB 2Rx8 PC4-2400T-E)
Disk Subsystem: 1 x 960 GB SATA SSD
Other Hardware: None

Base Pointers: 32/64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	8	722	151	<u>722</u>	<u>151</u>	722	151	4	347	157	347	157	<u>347</u>	<u>157</u>
416.gamess	8	649	241	652	240	<u>651</u>	<u>241</u>	8	642	244	<u>638</u>	<u>245</u>	632	248
433.milc	8	466	158	<u>466</u>	<u>158</u>	466	157	8	466	158	<u>466</u>	<u>158</u>	466	157
434.zeusmp	8	276	264	<u>276</u>	<u>264</u>	275	265	8	276	264	<u>276</u>	<u>264</u>	275	265
435.gromacs	8	<u>189</u>	<u>302</u>	189	302	192	297	8	<u>186</u>	<u>306</u>	187	305	184	310
436.cactusADM	8	<u>348</u>	<u>274</u>	348	275	349	274	8	<u>348</u>	<u>274</u>	348	275	349	274
437.leslie3d	8	718	105	718	105	<u>718</u>	<u>105</u>	4	328	115	327	115	<u>328</u>	<u>115</u>
444.namd	8	<u>344</u>	<u>187</u>	334	192	347	185	8	336	191	339	189	<u>336</u>	<u>191</u>
447.dealII	8	242	379	244	375	<u>243</u>	<u>376</u>	8	242	379	244	375	<u>243</u>	<u>376</u>
450.soplex	8	566	118	<u>567</u>	<u>118</u>	567	118	4	<u>255</u>	<u>131</u>	255	131	255	131
453.povray	8	134	318	<u>134</u>	<u>319</u>	133	319	8	114	374	116	368	<u>115</u>	<u>371</u>
454.calculix	8	<u>177</u>	<u>373</u>	177	373	178	372	8	<u>177</u>	<u>373</u>	177	373	178	372
459.GemsFDTD	8	967	87.8	<u>968</u>	<u>87.7</u>	968	87.7	4	449	94.6	449	94.5	<u>449</u>	<u>94.5</u>
465.tonto	8	355	222	342	230	<u>343</u>	<u>229</u>	8	<u>320</u>	<u>246</u>	324	243	315	250
470.lbm	8	537	205	<u>537</u>	<u>205</u>	537	205	8	537	205	<u>537</u>	<u>205</u>	537	205
481.wrf	8	478	187	<u>478</u>	<u>187</u>	479	187	8	478	187	<u>478</u>	<u>187</u>	479	187
482.sphinx3	8	753	207	<u>754</u>	<u>207</u>	755	206	8	753	207	<u>754</u>	<u>207</u>	755	206

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The taskset mechanism was used to bind copies to processors. The config file option 'submit' was used to generate taskset commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

BIOS configuration:
Boot performance mode set to Turbo Performance
Sysinfo program /home/cpu2006-1.2-ic17.0/config/sysinfo.rev6993

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECfp_rate2006 = 213

Lenovo ThinkServer RS160
(3.70 GHz, Intel Xeon E3-1240 v6)

SPECfp_rate_base2006 = 205

CPU2006 license: 9017

Test date: Aug-2017

Test sponsor: Lenovo Global Technology

Hardware Availability: Jun-2017

Tested by: Lenovo Global Technology

Software Availability: Nov-2016

Platform Notes (Continued)

Revision 6993 of 2015-11-06 (b5e8d4b4eb51ed28d7f98696cbe290c1)
running on RS160 Tue Aug 1 04:00:55 2017

This section contains SUT (System Under Test) info as seen by
some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E3-1240 v6 @ 3.70GHz
 1 "physical id"s (chips)
 8 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores : 4
  siblings  : 8
  physical 0: cores 0 1 2 3
 cache size : 8192 KB
```

```
From /proc/meminfo
MemTotal:      32888952 kB
HugePages_Total:      0
Hugepagesize:    2048 kB
```

```
From /etc/*release* /etc/*version*
SuSE-release:
SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 2
# This file is deprecated and will be removed in a future service pack or
release.
# Please check /etc/os-release for details about this release.
os-release:
NAME="SLES"
VERSION="12-SP2"
VERSION_ID="12.2"
PRETTY_NAME="SUSE Linux Enterprise Server 12 SP2"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12:sp2"
```

```
uname -a:
Linux RS160 4.4.21-69-default #1 SMP Tue Oct 25 10:58:20 UTC 2016 (9464f67)
x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Jul 31 15:43
```

```
SPEC is set to: /home/cpu2006-1.2-ic17.0
Filesystem      Type      Size  Used Avail Use% Mounted on
/dev/sda2       btrfs    895G   47G  847G   6% /home
Additional information from dmidecode:
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECfp_rate2006 = 213

Lenovo ThinkServer RS160
(3.70 GHz, Intel Xeon E3-1240 v6)

SPECfp_rate_base2006 = 205

CPU2006 license: 9017

Test date: Aug-2017

Test sponsor: Lenovo Global Technology

Hardware Availability: Jun-2017

Tested by: Lenovo Global Technology

Software Availability: Nov-2016

Platform Notes (Continued)

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS American Megatrends Inc. VB1TS223 03/16/2017

Memory:

2x Micron 18ASF2G72AZ-2G3B1 16 GB 2 rank 2400 MHz
2x Not Specified Not Specified

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:

LD_LIBRARY_PATH = "/home/cpu2006-1.2-ic17.0/libs/32:/home/cpu2006-1.2-ic17.0/libs/64:/home/cpu2006-1.2-ic17.0/sh10.2"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM
memory using Redhat Enterprise Linux 7.2

Transparent Huge Pages enabled by default

Filesystem page cache cleared with:

echo 1 > /proc/sys/vm/drop_caches

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64

416.gamess: -DSPEC_CPU_LP64

433.milc: -DSPEC_CPU_LP64

434.zeusmp: -DSPEC_CPU_LP64

435.gromacs: -DSPEC_CPU_LP64 -nofor_main

436.cactusADM: -DSPEC_CPU_LP64 -nofor_main

437.leslie3d: -DSPEC_CPU_LP64

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/

Page 4



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECfp_rate2006 = 213

Lenovo ThinkServer RS160
(3.70 GHz, Intel Xeon E3-1240 v6)

SPECfp_rate_base2006 = 205

CPU2006 license: 9017

Test date: Aug-2017

Test sponsor: Lenovo Global Technology

Hardware Availability: Jun-2017

Tested by: Lenovo Global Technology

Software Availability: Nov-2016

Base Portability Flags (Continued)

```

444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

Base Optimization Flags

C benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32
-qopt-mem-layout-trans=3

```

C++ benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32
-qopt-mem-layout-trans=3

```

Fortran benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch

```

Benchmarks using both Fortran and C:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32
-qopt-mem-layout-trans=3

```

Peak Compiler Invocation

C benchmarks:

```

icc -m64

```

C++ benchmarks (except as noted below):

```

icpc -m64

```

```

450.soplex: icpc -m32 -L/opt/intel/compilers_and_libraries_2017/linux/lib/ia32

```

Fortran benchmarks:

```

ifort -m64

```

Benchmarks using both Fortran and C:

```

icc -m64 ifort -m64

```



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECfp_rate2006 = 213

Lenovo ThinkServer RS160
(3.70 GHz, Intel Xeon E3-1240 v6)

SPECfp_rate_base2006 = 205

CPU2006 license: 9017

Test date: Aug-2017

Test sponsor: Lenovo Global Technology

Hardware Availability: Jun-2017

Tested by: Lenovo Global Technology

Software Availability: Nov-2016

Peak Portability Flags

```

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -D_FILE_OFFSET_BITS=64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

```

444.namd: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
         -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
         -no-prec-div(pass 2) -fno-alias -auto-ilp32
         -qopt-mem-layout-trans=3

```

447.dealII: basepeak = yes

```

450.soplex: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
           -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
           -no-prec-div(pass 2) -qopt-malloc-options=3
           -qopt-mem-layout-trans=3

```

```

453.povray: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
           -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
           -no-prec-div(pass 2) -unroll4 -qopt-mem-layout-trans=3

```

Fortran benchmarks:

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECfp_rate2006 = 213

Lenovo ThinkServer RS160
(3.70 GHz, Intel Xeon E3-1240 v6)

SPECfp_rate_base2006 = 205

CPU2006 license: 9017

Test date: Aug-2017

Test sponsor: Lenovo Global Technology

Hardware Availability: Jun-2017

Tested by: Lenovo Global Technology

Software Availability: Nov-2016

Peak Optimization Flags (Continued)

410.bwaves: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch

416.gamess: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -unroll2 -inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: Same as 410.bwaves

459.GemsFDTD: Same as 410.bwaves

465.tonto: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -unroll4 -auto -inline-calloc
-qopt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
-par-num-threads=1(pass 1) -qopt-prefetch -auto-ilp32
-qopt-mem-layout-trans=3

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Lenovo-Platform-Settings-V1.2-KBL-revC.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Lenovo-Platform-Settings-V1.2-KBL-revC.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Wed Aug 23 13:37:38 2017 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 23 August 2017.