



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C240 M5 (Intel Xeon Gold 6140M, 2.30GHz)

SPECfp<sup>®</sup>\_rate2006 = 1430

SPECfp\_rate\_base2006 = 1400

CPU2006 license: 9019


Test sponsor: Cisco Systems

Tested by: Cisco Systems

Test date: Aug-2017

Hardware Availability: Aug-2017

Software Availability: Apr-2017

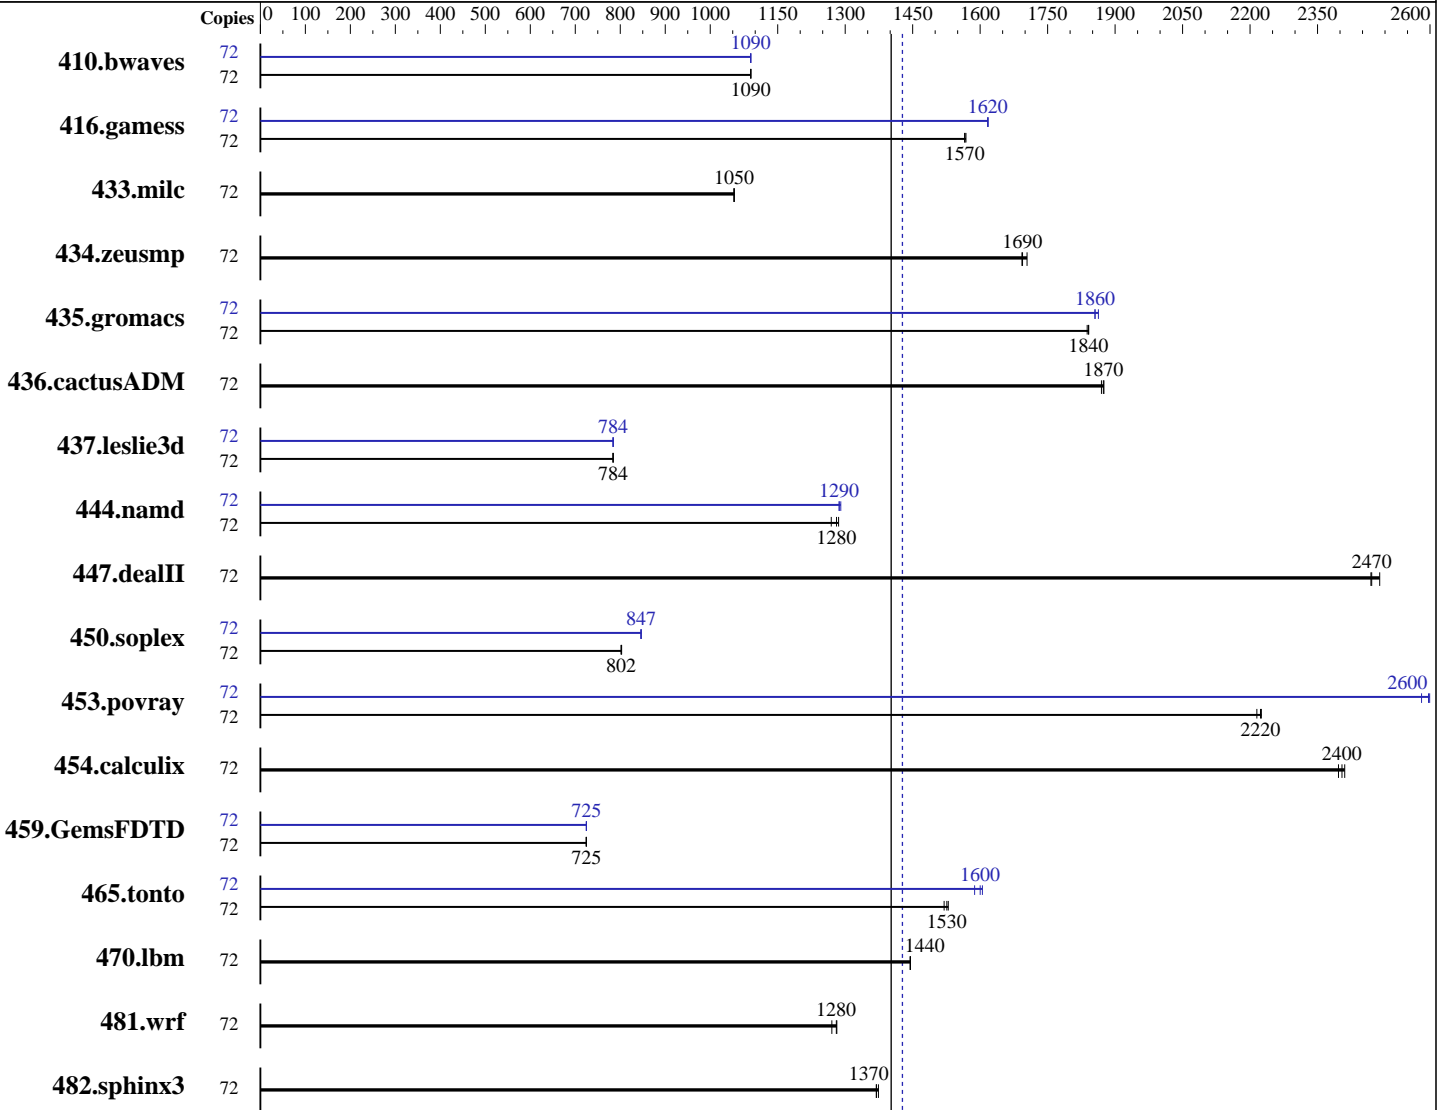

SPECfp\_rate\_base2006 = 1400

SPECfp\_rate2006 = 1430

### Hardware

CPU Name: Intel Xeon Gold 6140M  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.70 GHz  
 CPU MHz: 2300  
 FPU: Integrated  
 CPU(s) enabled: 36 cores, 2 chips, 18 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 1 MB I+D on chip per core

Continued on next page

### Software

Operating System: SUSE Linux Enterprise Server 12 SP2 (x86\_64) 4.4.21-69-default  
 Compiler: C/C++: Version 17.0.3.191 of Intel C/C++ Compiler for Linux;  
 Fortran: Version 17.0.3.191 of Intel Fortran Compiler for Linux  
 Auto Parallel: Yes  
 File System: xfs  
 System State: Run level 3 (multi-user)

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C240 M5 (Intel Xeon Gold 6140M, 2.30GHz)

SPECfp\_rate2006 = 1430

SPECfp\_rate\_base2006 = 1400

CPU2006 license: 9019

Test sponsor: Cisco Systems

Tested by: Cisco Systems

Test date: Aug-2017

Hardware Availability: Aug-2017

Software Availability: Apr-2017

L3 Cache: 24.75 MB I+D on chip per chip  
Other Cache: None  
Memory: 384 GB (24 x 16 GB 2Rx4 PC4-2666V-R)  
Disk Subsystem: 1 x 900 GB SAS 10K RPM  
Other Hardware: None

Base Pointers: 32/64-bit  
Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	72	897	1090	<b>897</b>	<b>1090</b>	898	1090	72	897	1090	<b>898</b>	<b>1090</b>	898	1090
416.gamess	72	<b>900</b>	<b>1570</b>	899	1570	901	1570	72	<b>872</b>	<b>1620</b>	872	1620	872	1620
433.milc	72	<b>628</b>	<b>1050</b>	628	1050	627	1050	72	<b>628</b>	<b>1050</b>	628	1050	627	1050
434.zeusmp	72	<b>387</b>	<b>1690</b>	387	1690	384	1700	72	<b>387</b>	<b>1690</b>	387	1690	384	1700
435.gromacs	72	<b>279</b>	<b>1840</b>	279	1840	280	1840	72	277	1860	<b>277</b>	<b>1860</b>	276	1860
436.cactusADM	72	460	1870	<b>459</b>	<b>1870</b>	459	1880	72	460	1870	<b>459</b>	<b>1870</b>	459	1880
437.leslie3d	72	<b>863</b>	<b>784</b>	863	784	863	784	72	863	785	<b>863</b>	<b>784</b>	863	784
444.namd	72	449	1290	<b>451</b>	<b>1280</b>	455	1270	72	448	1290	449	1290	<b>449</b>	<b>1290</b>
447.dealII	72	331	2490	<b>333</b>	<b>2470</b>	334	2470	72	331	2490	<b>333</b>	<b>2470</b>	334	2470
450.soplex	72	749	802	<b>748</b>	<b>802</b>	748	803	72	709	847	710	846	<b>709</b>	<b>847</b>
453.povray	72	172	2230	173	2220	<b>172</b>	<b>2220</b>	72	148	2580	147	2600	<b>148</b>	<b>2600</b>
454.calculix	72	246	2410	248	2400	<b>247</b>	<b>2400</b>	72	246	2410	248	2400	<b>247</b>	<b>2400</b>
459.GemsFDTD	72	1055	724	1054	725	<b>1054</b>	<b>725</b>	72	1054	725	<b>1054</b>	<b>725</b>	1054	725
465.tonto	72	463	1530	<b>464</b>	<b>1530</b>	466	1520	72	441	1610	446	1590	<b>443</b>	<b>1600</b>
470.lbm	72	685	1440	685	1450	<b>685</b>	<b>1440</b>	72	685	1440	685	1450	<b>685</b>	<b>1440</b>
481.wrf	72	<b>628</b>	<b>1280</b>	628	1280	633	1270	72	<b>628</b>	<b>1280</b>	628	1280	633	1270
482.sphinx3	72	<b>1025</b>	<b>1370</b>	1021	1370	1025	1370	72	<b>1025</b>	<b>1370</b>	1021	1370	1025	1370

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS Settings:  
Intel HyperThreading Technology set to Enabled  
CPU performance set to Enterprise

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C240 M5 (Intel Xeon Gold 6140M, 2.30GHz)

SPECfp\_rate2006 = 1430

SPECfp\_rate\_base2006 = 1400

CPU2006 license: 9019

Test sponsor: Cisco Systems

Tested by: Cisco Systems

Test date: Aug-2017

Hardware Availability: Aug-2017

Software Availability: Apr-2017

### Platform Notes (Continued)

```

Power Performance Tuning set to OS
SNC set to Enabled
IMC Interleaving set to 1-way Interleave
Patrol Scrub set to Disabled
Sysinfo program /opt/cpu2006-1.2/config/sysinfo.rev6993
Revision 6993 of 2015-11-06 (b5e8d4b4eb51ed28d7f98696cbe290c1)
running on linux-0s5q Sat Aug 5 01:56:48 2017

```

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see: <http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```

From /proc/cpuinfo
model name : Intel(R) Xeon(R) Gold 6140M CPU @ 2.30GHz
 2 "physical id"s (chips)
 72 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores : 18
  siblings  : 36
  physical 0: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
  physical 1: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
cache size : 25344 KB

```

```

From /proc/meminfo
MemTotal: 394864164 kB
HugePages_Total: 0
Hugepagesize: 2048 kB

```

```

From /etc/*release* /etc/*version*
SuSE-release:
SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 2
# This file is deprecated and will be removed in a future service pack or
release.
# Please check /etc/os-release for details about this release.
os-release:
NAME="SLES"
VERSION="12-SP2"
VERSION_ID="12.2"
PRETTY_NAME="SUSE Linux Enterprise Server 12 SP2"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12:sp2"

```

```

uname -a:
Linux linux-0s5q 4.4.21-69-default #1 SMP Tue Oct 25 10:58:20 UTC 2016
(9464f67) x86_64 x86_64 x86_64 GNU/Linux

```

run-level 3 Aug 4 15:39

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C240 M5 (Intel Xeon Gold 6140M, 2.30GHz)

SPECfp\_rate2006 = 1430

SPECfp\_rate\_base2006 = 1400

**CPU2006 license:** 9019  
**Test sponsor:** Cisco Systems  
**Tested by:** Cisco Systems

**Test date:** Aug-2017  
**Hardware Availability:** Aug-2017  
**Software Availability:** Apr-2017

### Platform Notes (Continued)

SPEC is set to: /opt/cpu2006-1.2  
Filesystem Type Size Used Avail Use% Mounted on  
/dev/sdb2 xfs 700G 60G 640G 9% /  
Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS Cisco Systems, Inc. C240M5.3.1.1d.0.0615170707 06/15/2017  
Memory:  
24x 0xCE00 M393A2G40EB2-CTD 16 GB 2 rank 2666 MHz

(End of data from sysinfo program)

### General Notes

Environment variables set by runspec before the start of the run:  
LD\_LIBRARY\_PATH = "/opt/cpu2006-1.2/lib/ia32:/opt/cpu2006-1.2/lib/intel64:/opt/cpu2006-1.2/sh10.2"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM  
memory using Redhat Enterprise Linux 7.2  
Transparent Huge Pages enabled with:  
echo always > /sys/kernel/mm/transparent\_hugepage/enabled  
Filesystem page cache cleared with:  
shell invocation of 'sync; echo 3 > /proc/sys/vm/drop\_caches' prior to run  
runspec command invoked through numactl i.e.:  
numactl --interleave=all runspec <etc>

### Base Compiler Invocation

C benchmarks:  
icc -m64

C++ benchmarks:  
icpc -m64

Fortran benchmarks:  
ifort -m64

Benchmarks using both Fortran and C:  
icc -m64 ifort -m64



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C240 M5 (Intel Xeon Gold 6140M, 2.30GHz)

SPECfp\_rate2006 = 1430

SPECfp\_rate\_base2006 = 1400

CPU2006 license: 9019

Test sponsor: Cisco Systems

Tested by: Cisco Systems

Test date: Aug-2017

Hardware Availability: Aug-2017

Software Availability: Apr-2017

## Base Portability Flags

```

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

## Base Optimization Flags

C benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32
-qopt-mem-layout-trans=3

```

C++ benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32
-qopt-mem-layout-trans=3

```

Fortran benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch

```

Benchmarks using both Fortran and C:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32
-qopt-mem-layout-trans=3

```

## Peak Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks (except as noted below):

```
icpc -m64
```

```
450.soplex: icpc -m32 -L/opt/intel/compilers_and_libraries_2017/linux/lib/ia32
```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C240 M5 (Intel Xeon Gold 6140M, 2.30GHz)

SPECfp\_rate2006 = 1430

SPECfp\_rate\_base2006 = 1400

CPU2006 license: 9019

Test sponsor: Cisco Systems

Tested by: Cisco Systems

Test date: Aug-2017

Hardware Availability: Aug-2017

Software Availability: Apr-2017

## Peak Compiler Invocation (Continued)

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
 416.gamess: -DSPEC\_CPU\_LP64  
 433.milc: -DSPEC\_CPU\_LP64  
 434.zeusmp: -DSPEC\_CPU\_LP64  
 435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
 436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
 437.leslie3d: -DSPEC\_CPU\_LP64  
 444.namd: -DSPEC\_CPU\_LP64  
 447.dealII: -DSPEC\_CPU\_LP64  
 450.soplex: -D\_FILE\_OFFSET\_BITS=64  
 453.povray: -DSPEC\_CPU\_LP64  
 454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
 459.GemsFDTD: -DSPEC\_CPU\_LP64  
 465.tonto: -DSPEC\_CPU\_LP64  
 470.lbm: -DSPEC\_CPU\_LP64  
 481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
 482.sphinx3: -DSPEC\_CPU\_LP64

## Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
 -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -fno-alias -auto-ilp32  
 -qopt-mem-layout-trans=3

447.dealII: basepeak = yes

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C240 M5 (Intel Xeon Gold 6140M, 2.30GHz)

SPECfp\_rate2006 = 1430

SPECfp\_rate\_base2006 = 1400

CPU2006 license: 9019

Test sponsor: Cisco Systems

Tested by: Cisco Systems

Test date: Aug-2017

Hardware Availability: Aug-2017

Software Availability: Apr-2017

## Peak Optimization Flags (Continued)

450.soplex: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -qopt-malloc-options=3  
-qopt-mem-layout-trans=3

453.povray: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -unroll4 -qopt-mem-layout-trans=3

### Fortran benchmarks:

410.bwaves: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch

416.gamess: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -unroll2 -inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: Same as 410.bwaves

459.GemsFDTD: Same as 410.bwaves

465.tonto: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -unroll4 -auto -inline-calloc  
-qopt-malloc-options=3

### Benchmarks using both Fortran and C:

435.gromacs: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
-par-num-threads=1(pass 1) -qopt-prefetch -auto-ilp32  
-qopt-mem-layout-trans=3

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.html>

<http://www.spec.org/cpu2006/flags/Cisco-Platform-Settings-V1.2-revH.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.xml>

<http://www.spec.org/cpu2006/flags/Cisco-Platform-Settings-V1.2-revH.xml>



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C240 M5 (Intel Xeon Gold 6140M, 2.30GHz)

SPECfp\_rate2006 = 1430

SPECfp\_rate\_base2006 = 1400

**CPU2006 license:** 9019

**Test sponsor:** Cisco Systems

**Tested by:** Cisco Systems

**Test date:** Aug-2017

**Hardware Availability:** Aug-2017

**Software Availability:** Apr-2017

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Wed Aug 23 13:13:51 2017 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 22 August 2017.