



SPEC[®] CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

Synergy 480 Gen10
(2.10 GHz, Intel Xeon Gold 6130)

SPECfp[®]2006 = Not Run

SPECfp_base2006 = 137

CPU2006 license: 3


Test sponsor: HPE

Tested by: HPE

Test date: Oct-2017

Hardware Availability: Oct-2017

Software Availability: Apr-2017

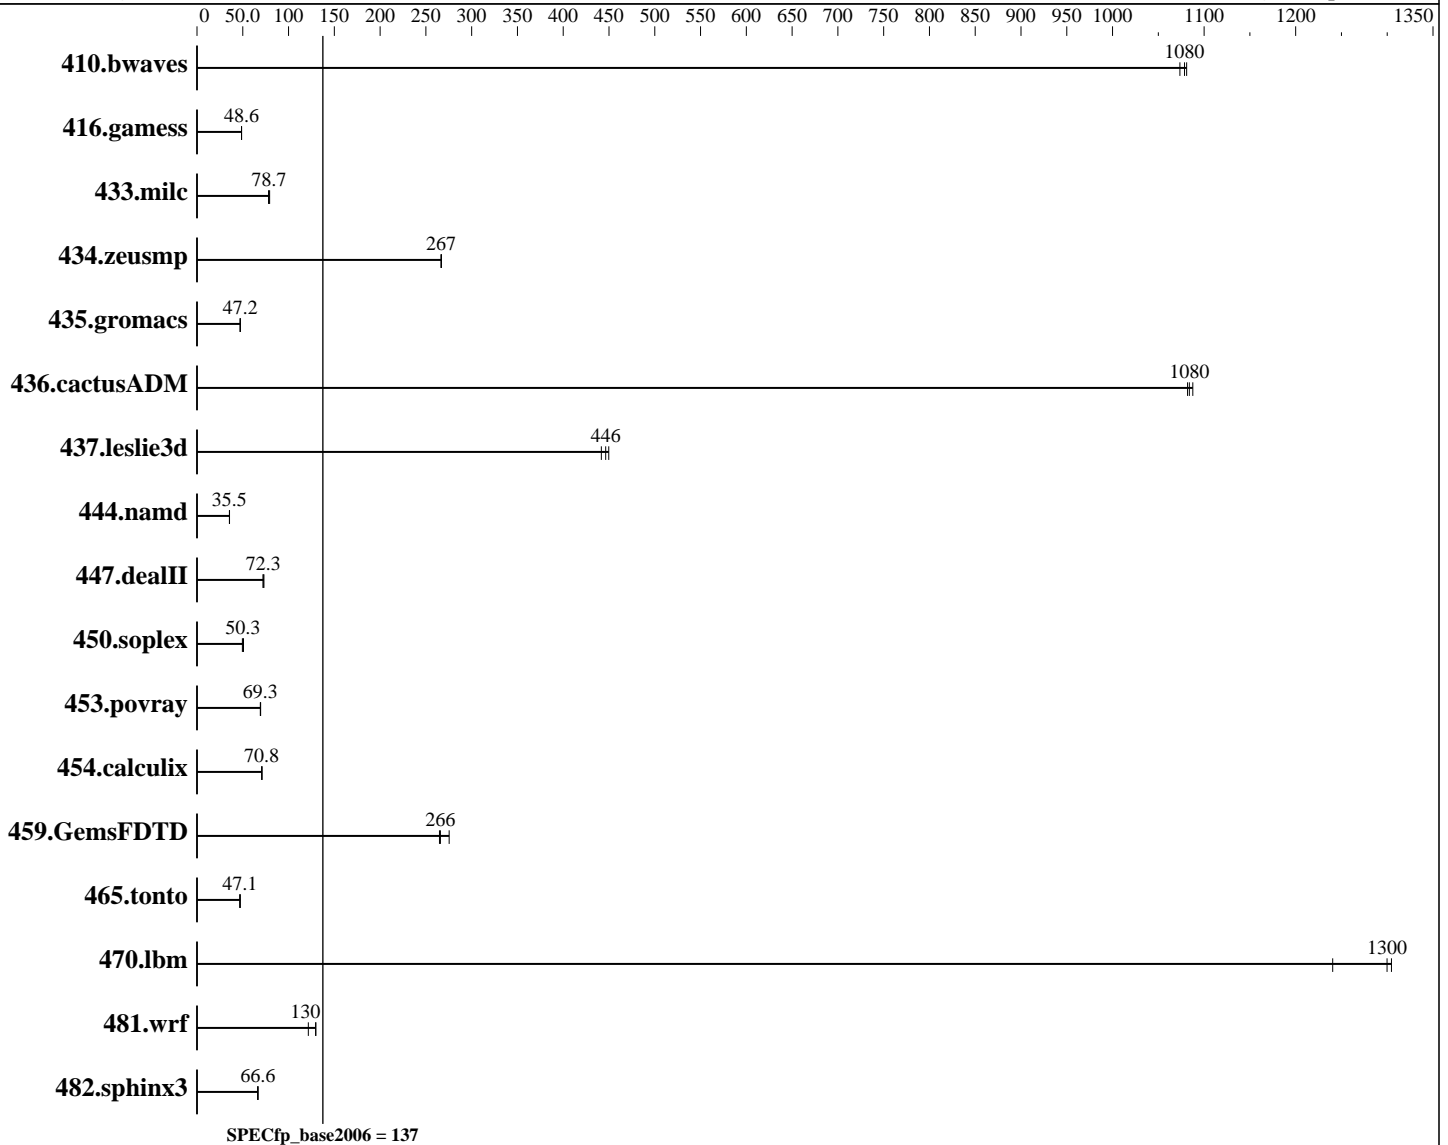

Hardware

CPU Name: Intel Xeon Gold 6130
 CPU Characteristics: Intel Turbo Boost Technology up to 3.70 GHz
 CPU MHz: 2100
 FPU: Integrated
 CPU(s) enabled: 32 cores, 2 chips, 16 cores/chip
 CPU(s) orderable: 1, 2 chip(s)
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 1 MB I+D on chip per core

Continued on next page

Software

Operating System: SUSE Linux Enterprise Server 12 (x86_64) SP2
 Kernel 4.4.21-69-default
 Compiler: C/C++: Version 17.0.3.191 of Intel C/C++ Compiler for Linux;
 Fortran: Version 17.0.3.191 of Intel Fortran Compiler for Linux
 Auto Parallel: Yes
 File System: xfs
 System State: Run level 3 (multi-user)

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

Synergy 480 Gen10
(2.10 GHz, Intel Xeon Gold 6130)

SPECfp2006 = **Not Run**

SPECfp_base2006 = **137**

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Oct-2017

Hardware Availability: Oct-2017

Software Availability: Apr-2017

L3 Cache: 22 MB I+D on chip per chip
Other Cache: None
Memory: 384 GB (24 x 16 GB 2Rx8 PC4-2666V-R)
Disk Subsystem: 1 x 960 GB SATA SSD, RAID 0
Other Hardware: None

Base Pointers: 64-bit
Peak Pointers: Not Applicable
Other Software: None

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	12.6	1080	<u>12.6</u>	<u>1080</u>	12.7	1070						
416.gamess	402	48.7	<u>403</u>	<u>48.6</u>	403	48.6						
433.milc	117	78.2	<u>117</u>	<u>78.7</u>	116	79.3						
434.zeusmp	34.1	267	<u>34.1</u>	<u>267</u>	34.1	267						
435.gromacs	<u>151</u>	<u>47.2</u>	151	47.3	151	47.2						
436.cactusADM	<u>11.0</u>	<u>1080</u>	11.0	1080	11.0	1090						
437.leslie3d	20.9	450	<u>21.1</u>	<u>446</u>	21.3	442						
444.namd	226	35.5	226	35.4	<u>226</u>	<u>35.5</u>						
447.dealII	<u>158</u>	<u>72.3</u>	156	73.1	158	72.3						
450.soplex	168	49.6	<u>166</u>	<u>50.3</u>	164	50.8						
453.povray	76.5	69.5	<u>76.7</u>	<u>69.3</u>	76.9	69.2						
454.calculix	116	70.9	117	70.8	<u>117</u>	<u>70.8</u>						
459.GemsFDTD	<u>39.9</u>	<u>266</u>	40.1	265	38.5	275						
465.tonto	<u>209</u>	<u>47.1</u>	211	46.7	208	47.2						
470.lbm	11.1	1240	<u>10.6</u>	<u>1300</u>	10.5	1300						
481.wrf	<u>86.2</u>	<u>130</u>	86.0	130	91.9	122						
482.sphinx3	294	66.2	<u>293</u>	<u>66.6</u>	292	66.7						

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"
Transparent Huge Pages enabled by default
Filesystem page cache cleared with:
shell invocation of 'sync; echo 3 > /proc/sys/vm/drop_caches' prior to run

Platform Notes

BIOS Configuration:
Intel Hyperthreading set to Disabled
Thermal Configuration set to Maximum Cooling
Memory Patrol Scrubbing set to Disabled
LLC Prefetcher set to Enabled
LLC Dead Line Allocation set to Disabled
Stale A to S set to Disabled

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

Synergy 480 Gen10
(2.10 GHz, Intel Xeon Gold 6130)

SPECfp2006 =

Not Run

SPECfp_base2006 =

137

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Oct-2017

Hardware Availability: Oct-2017

Software Availability: Apr-2017

Platform Notes (Continued)

Workload Pofile set to General Peak Frequency Compute
Energy/Performance Bias set to Maximum Performance
Uncore Frequency Scaling set to Auto
Workload Pofile set to Custom
NUMA Group Size Optimization set to Flat

Sysinfo program /home/cpu2006/config/sysinfo.rev6993
Revision 6993 of 2015-11-06 (b5e8d4b4eb51ed28d7f98696cbe290c1)
running on linux-vjuj Mon Oct 16 18:44:51 2017

This section contains SUT (System Under Test) info as seen by
some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : Intel(R) Xeon(R) Gold 6130 CPU @ 2.10GHz
 2 "physical id"s (chips)
 32 "processors"
```

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

```
cpu cores : 16
siblings  : 16
physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
cache size : 22528 KB
```

From /proc/meminfo

```
MemTotal:      395929796 kB
HugePages_Total:      0
Hugepagesize:    2048 kB
```

/usr/bin/lsb_release -d

```
SUSE Linux Enterprise Server 12 SP2
```

From /etc/*release* /etc/*version*

SuSE-release:

```
SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 2
```

This file is deprecated and will be removed in a future service pack or release.

Please check /etc/os-release for details about this release.

os-release:

```
NAME="SLES"
VERSION="12-SP2"
VERSION_ID="12.2"
PRETTY_NAME="SUSE Linux Enterprise Server 12 SP2"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12:sp2"
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

Synergy 480 Gen10
(2.10 GHz, Intel Xeon Gold 6130)

SPECfp2006 = Not Run

SPECfp_base2006 = 137

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Oct-2017

Hardware Availability: Oct-2017

Software Availability: Apr-2017

Platform Notes (Continued)

```
uname -a:
Linux linux-vjuj 4.4.21-69-default #1 SMP Tue Oct 25 10:58:20 UTC 2016
(9464f67) x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Oct 16 16:27
```

```
SPEC is set to: /home/cpu2006
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda4        xfs   852G  7.3G  845G   1% /home
Additional information from dmidecode:
```

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

```
BIOS HPE I42 09/27/2017
```

```
Memory:
```

```
24x UNKNOWN NOT AVAILABLE 16 GB 2 rank 2666 MHz
```

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:

```
KMP_AFFINITY = "granularity=core,compact"
```

```
LD_LIBRARY_PATH = "/home/cpu2006/lib/ia32:/home/cpu2006/lib/intel64:/home/cpu2006/sh10.2"
```

```
OMP_NUM_THREADS = "32"
```

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM memory using Redhat Enterprise Linux 7.2

Base Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

Synergy 480 Gen10
(2.10 GHz, Intel Xeon Gold 6130)

SPECfp2006 =

Not Run

SPECfp_base2006 =

137

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Oct-2017

Hardware Availability: Oct-2017

Software Availability: Apr-2017

Base Portability Flags

```

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.lelie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.deallI: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

Base Optimization Flags

C benchmarks:

`-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -qopt-prefetch`

C++ benchmarks:

`-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch`

Fortran benchmarks:

`-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -qopt-prefetch`

Benchmarks using both Fortran and C:

`-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -qopt-prefetch`

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.html>

<http://www.spec.org/cpu2006/flags/HPE-Platform-Flags-Intel-V1.2-SKX-revD.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.xml>

<http://www.spec.org/cpu2006/flags/HPE-Platform-Flags-Intel-V1.2-SKX-revD.xml>



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

Synergy 480 Gen10
(2.10 GHz, Intel Xeon Gold 6130)

SPECfp2006 = Not Run

SPECfp_base2006 = 137

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Oct-2017

Hardware Availability: Oct-2017

Software Availability: Apr-2017

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Wed Nov 15 10:59:10 2017 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 14 November 2017.