



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR590  
(2.00 GHz, Intel Xeon Platinum 8164)

SPECfp<sup>®</sup>\_rate2006 = 1580

SPECfp\_rate\_base2006 = 1540

CPU2006 license: 9017


Test sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test date: Oct-2017

Hardware Availability: Nov-2017

Software Availability: Aug-2017

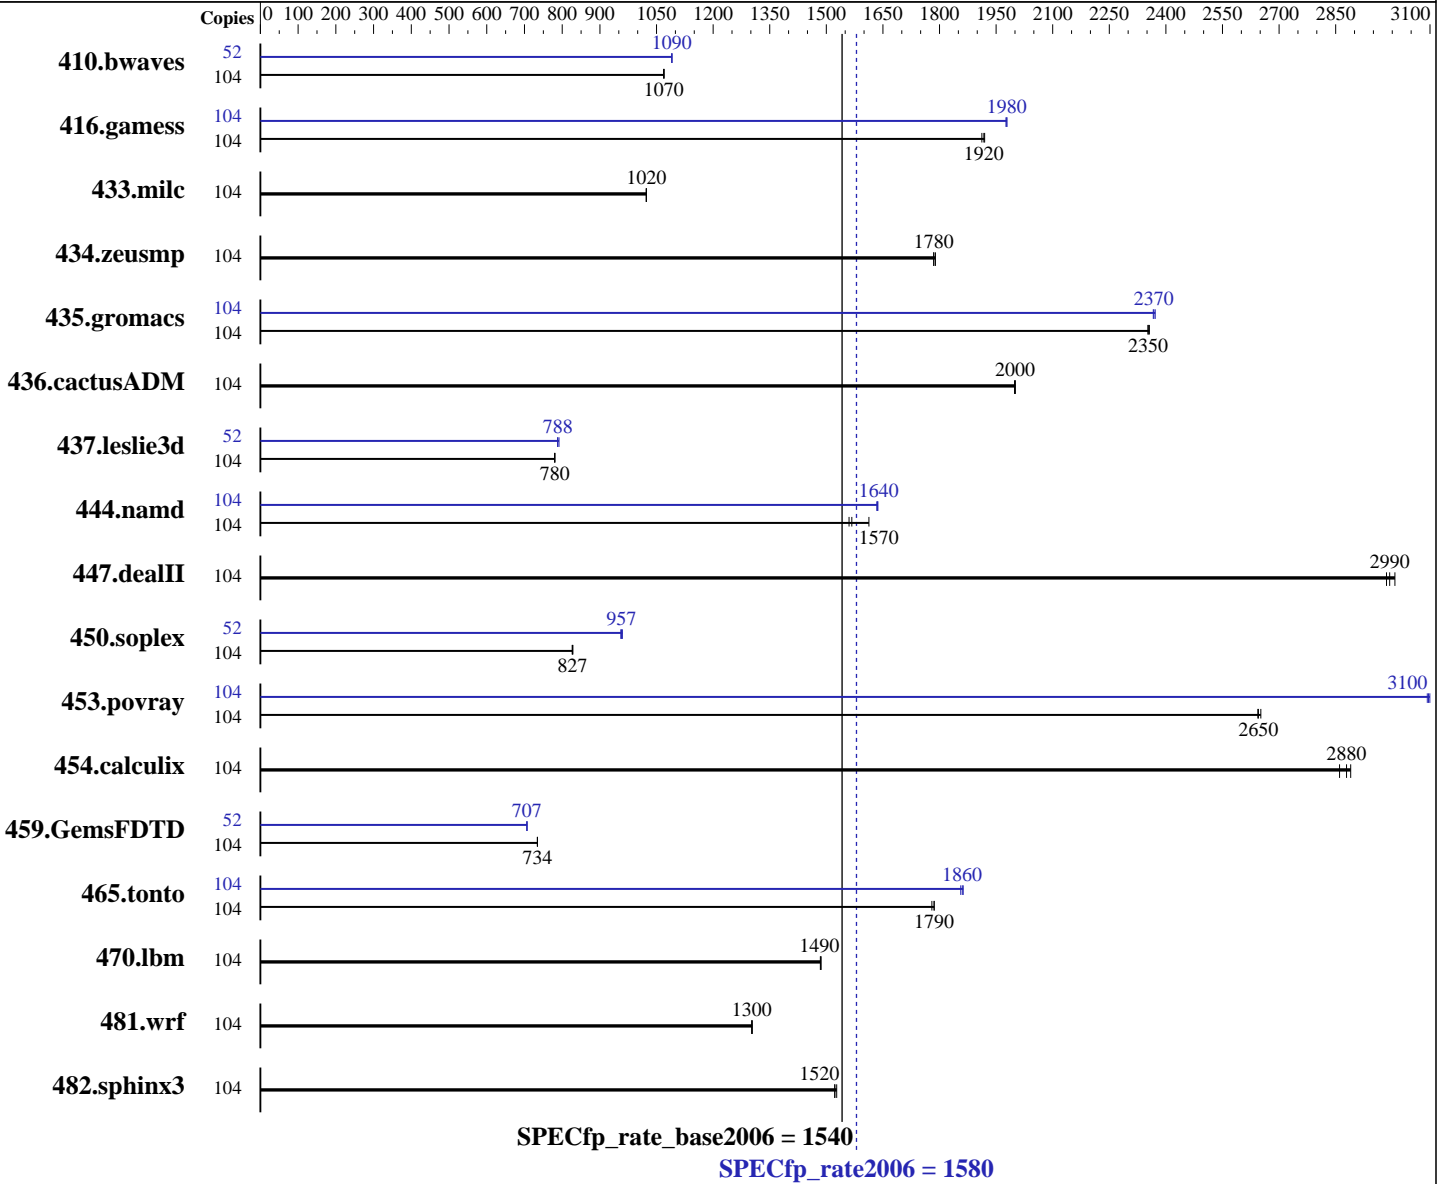

### Hardware

CPU Name: Intel Xeon Platinum 8164  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.70 GHz  
 CPU MHz: 2000  
 FPU: Integrated  
 CPU(s) enabled: 52 cores, 2 chips, 26 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 1 MB I+D on chip per core

Continued on next page

### Software

Operating System: Red Hat Enterprise Linux Server release 7.4 (Maipo)  
 Kernel 3.10.0-693.el7.x86\_64  
 Compiler: C/C++: Version 17.0.3.191 of Intel C/C++ Compiler for Linux;  
 Fortran: Version 17.0.3.191 of Intel Fortran Compiler for Linux  
 Auto Parallel: Yes  
 File System: xfs

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECfp\_rate2006 = 1580

ThinkSystem SR590  
(2.00 GHz, Intel Xeon Platinum 8164)

SPECfp\_rate\_base2006 = 1540

CPU2006 license: 9017

Test date: Oct-2017

Test sponsor: Lenovo Global Technology

Hardware Availability: Nov-2017

Tested by: Lenovo Global Technology

Software Availability: Aug-2017

L3 Cache: 35.75 MB I+D on chip per chip  
Other Cache: None  
Memory: 384 GB (12 x 32 GB 2Rx4 PC4-2666V-R)  
Disk Subsystem: 1 x 800 GB SAS SSD  
Other Hardware: None

System State: Run level 3 (multi-user)  
Base Pointers: 32/64-bit  
Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	104	1323	1070	<u>1321</u>	<u>1070</u>	1321	1070	52	<u>648</u>	<u>1090</u>	648	1090	648	1090
416.gamess	104	1065	1910	1061	1920	<u>1062</u>	<u>1920</u>	104	<u>1029</u>	<u>1980</u>	1029	1980	1030	1980
433.milc	104	933	1020	933	1020	<u>933</u>	<u>1020</u>	104	933	1020	933	1020	<u>933</u>	<u>1020</u>
434.zeusmp	104	529	1790	530	1780	<u>530</u>	<u>1780</u>	104	529	1790	530	1780	<u>530</u>	<u>1780</u>
435.gromacs	104	315	2360	316	2350	<u>316</u>	<u>2350</u>	104	313	2370	314	2370	<u>314</u>	<u>2370</u>
436.cactusADM	104	622	2000	<u>621</u>	<u>2000</u>	621	2000	104	622	2000	<u>621</u>	<u>2000</u>	621	2000
437.leslie3d	104	<u>1253</u>	<u>780</u>	1253	780	1252	781	52	621	788	<u>620</u>	<u>788</u>	618	792
444.namd	104	<u>532</u>	<u>1570</u>	517	1610	535	1560	104	<u>510</u>	<u>1640</u>	511	1630	510	1640
447.dealII	104	399	2980	<u>397</u>	<u>2990</u>	396	3010	104	399	2980	<u>397</u>	<u>2990</u>	396	3010
450.soplex	104	1047	828	<u>1048</u>	<u>827</u>	1050	826	52	<u>453</u>	<u>957</u>	454	955	452	960
453.povray	104	209	2650	<u>209</u>	<u>2650</u>	209	2640	104	<u>179</u>	<u>3100</u>	179	3090	179	3100
454.calculix	104	297	2890	300	2860	<u>298</u>	<u>2880</u>	104	297	2890	300	2860	<u>298</u>	<u>2880</u>
459.GemsFDTD	104	<u>1503</u>	<u>734</u>	1503	734	1502	735	52	781	706	<u>781</u>	<u>707</u>	781	707
465.tonto	104	573	1790	<u>573</u>	<u>1790</u>	575	1780	104	551	1860	549	1860	<u>550</u>	<u>1860</u>
470.lbm	104	963	1480	962	1490	<u>962</u>	<u>1490</u>	104	963	1480	962	1490	<u>962</u>	<u>1490</u>
481.wrf	104	891	1300	892	1300	<u>892</u>	<u>1300</u>	104	891	1300	892	1300	<u>892</u>	<u>1300</u>
482.sphinx3	104	1327	1530	<u>1331</u>	<u>1520</u>	1331	1520	104	1327	1530	<u>1331</u>	<u>1520</u>	1331	1520

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"  
echo 0 > /proc/sys/kernel/numa\_balancing



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECfp\_rate2006 = 1580

ThinkSystem SR590  
(2.00 GHz, Intel Xeon Platinum 8164)

SPECfp\_rate\_base2006 = 1540

CPU2006 license: 9017

Test date: Oct-2017

Test sponsor: Lenovo Global Technology

Hardware Availability: Nov-2017

Tested by: Lenovo Global Technology

Software Availability: Aug-2017

### Platform Notes

BIOS configuration:

Choose Operating Mode set to Maximum Performance

Execute Disable Bit set to Disable

DCU Streamer Prefetcher set to Disable

MONITORMWAIT set to Enable

SNC set to Enable

XPT Prefetcher set to Enable

Stale AtoS set to Enable

LLC Deadline Alloc set to Disable

Pactrol Scrub set to Disable

Sysinfo program /home/cpu2006-1.2-ic17.0u3/config/sysinfo.rev6993

Revision 6993 of 2015-11-06 (b5e8d4b4eb51ed28d7f98696cbe290c1)

running on localhost.localdomain Sun Oct 29 19:16:36 2017

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) Platinum 8164 CPU @ 2.00GHz

2 "physical id"s (chips)

104 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 26

siblings : 52

physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 16 17 18 19 20 21 22 24 25

26 27 28 29

physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 16 17 18 19 20 21 22 24 25

26 27 28 29

cache size : 36608 KB

From /proc/meminfo

MemTotal: 395894540 kB

HugePages\_Total: 0

Hugepagesize: 2048 kB

From /etc/\*release\* /etc/\*version\*

os-release:

NAME="Red Hat Enterprise Linux Server"

VERSION="7.4 (Maipo)"

ID="rhel"

ID\_LIKE="fedora"

VARIANT="Server"

VARIANT\_ID="server"

VERSION\_ID="7.4"

PRETTY\_NAME="Red Hat Enterprise Linux Server 7.4 (Maipo)"

redhat-release: Red Hat Enterprise Linux Server release 7.4 (Maipo)

system-release: Red Hat Enterprise Linux Server release 7.4 (Maipo)

system-release-cpe: cpe:/o:redhat:enterprise\_linux:7.4:ga:server

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECfp\_rate2006 = 1580

ThinkSystem SR590  
(2.00 GHz, Intel Xeon Platinum 8164)

SPECfp\_rate\_base2006 = 1540

CPU2006 license: 9017

Test date: Oct-2017

Test sponsor: Lenovo Global Technology

Hardware Availability: Nov-2017

Tested by: Lenovo Global Technology

Software Availability: Aug-2017

## Platform Notes (Continued)

```
uname -a:
Linux localhost.localdomain 3.10.0-693.el7.x86_64 #1 SMP Thu Jul 6 19:56:57
EDT 2017 x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Oct 29 19:13
```

```
SPEC is set to: /home/cpu2006-1.2-ic17.0u3
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda4       xfs   690G  151G  539G  22% /home
```

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS Lenovo -[TEE119J-1.20]- 09/06/2017

Memory:

```
12x Hynix HMA84GR7AFR4N-VK 32 GB 2 rank 2666 MHz
4x NO DIMM NO DIMM
```

(End of data from sysinfo program)

## General Notes

Environment variables set by runspec before the start of the run:

```
LD_LIBRARY_PATH = "/home/cpu2006-1.2-ic17.0u3/lib/ia32:/home/cpu2006-1.2-ic17.0u3/lib/intel64:/home/cpu2006-1.2-ic17.0u3/sh10.2"
```

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM

memory using Redhat Enterprise Linux 7.2

Transparent Huge Pages enabled by default

Filesystem page cache cleared with:

shell invocation of 'sync; echo 3 > /proc/sys/vm/drop\_caches' prior to run

runspec command invoked through numactl i.e.:

```
numactl --interleave=all runspec <etc>
```

## Base Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECfp\_rate2006 = 1580

ThinkSystem SR590  
(2.00 GHz, Intel Xeon Platinum 8164)

SPECfp\_rate\_base2006 = 1540

CPU2006 license: 9017

Test date: Oct-2017

Test sponsor: Lenovo Global Technology

Hardware Availability: Nov-2017

Tested by: Lenovo Global Technology

Software Availability: Aug-2017

## Base Portability Flags

```

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

## Base Optimization Flags

C benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32
-qopt-mem-layout-trans=3

```

C++ benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32
-qopt-mem-layout-trans=3

```

Fortran benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch

```

Benchmarks using both Fortran and C:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32
-qopt-mem-layout-trans=3

```

## Peak Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks (except as noted below):

```
icpc -m64
```

```
450.soplex: icpc -m32 -L/opt/intel/compilers_and_libraries_2017/linux/lib/ia32
```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECfp\_rate2006 = 1580

ThinkSystem SR590  
(2.00 GHz, Intel Xeon Platinum 8164)

SPECfp\_rate\_base2006 = 1540

CPU2006 license: 9017

Test date: Oct-2017

Test sponsor: Lenovo Global Technology

Hardware Availability: Nov-2017

Tested by: Lenovo Global Technology

Software Availability: Aug-2017

## Peak Compiler Invocation (Continued)

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
 416.gamess: -DSPEC\_CPU\_LP64  
 433.milc: -DSPEC\_CPU\_LP64  
 434.zeusmp: -DSPEC\_CPU\_LP64  
 435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
 436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
 437.leslie3d: -DSPEC\_CPU\_LP64  
 444.namd: -DSPEC\_CPU\_LP64  
 447.dealII: -DSPEC\_CPU\_LP64  
 450.soplex: -D\_FILE\_OFFSET\_BITS=64  
 453.povray: -DSPEC\_CPU\_LP64  
 454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
 459.GemsFDTD: -DSPEC\_CPU\_LP64  
 465.tonto: -DSPEC\_CPU\_LP64  
 470.lbm: -DSPEC\_CPU\_LP64  
 481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
 482.sphinx3: -DSPEC\_CPU\_LP64

## Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
 -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -fno-alias -auto-ilp32  
 -qopt-mem-layout-trans=3

447.dealII: basepeak = yes

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECfp\_rate2006 = 1580

ThinkSystem SR590  
(2.00 GHz, Intel Xeon Platinum 8164)

SPECfp\_rate\_base2006 = 1540

CPU2006 license: 9017

Test date: Oct-2017

Test sponsor: Lenovo Global Technology

Hardware Availability: Nov-2017

Tested by: Lenovo Global Technology

Software Availability: Aug-2017

## Peak Optimization Flags (Continued)

450.soplex: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -qopt-malloc-options=3  
-qopt-mem-layout-trans=3

453.povray: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -unroll4 -qopt-mem-layout-trans=3

Fortran benchmarks:

410.bwaves: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch

416.gamess: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -unroll2 -inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: Same as 410.bwaves

459.GemsFDTD: Same as 410.bwaves

465.tonto: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -unroll4 -auto -inline-calloc  
-qopt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
-par-num-threads=1(pass 1) -qopt-prefetch -auto-ilp32  
-qopt-mem-layout-trans=3

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.html>

<http://www.spec.org/cpu2006/flags/Lenovo-Platform-Flags-V1.2-SKL-F.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.xml>

<http://www.spec.org/cpu2006/flags/Lenovo-Platform-Flags-V1.2-SKL-F.xml>



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR590  
(2.00 GHz, Intel Xeon Platinum 8164)

SPECfp\_rate2006 = 1580

SPECfp\_rate\_base2006 = 1540

**CPU2006 license:** 9017

**Test sponsor:** Lenovo Global Technology

**Tested by:** Lenovo Global Technology

**Test date:** Oct-2017

**Hardware Availability:** Nov-2017

**Software Availability:** Aug-2017

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Thu Dec 21 17:10:50 2017 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 21 December 2017.