



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL360 Gen10  
(2.20 GHz, Intel Xeon Gold 5120)

SPECfp<sup>®</sup>\_rate2006 = Not Run

SPECfp\_rate\_base2006 = 1070

CPU2006 license: 3


Test sponsor: HPE

Tested by: HPE

Test date: Nov-2017

Hardware Availability: Oct-2017

Software Availability: Apr-2017

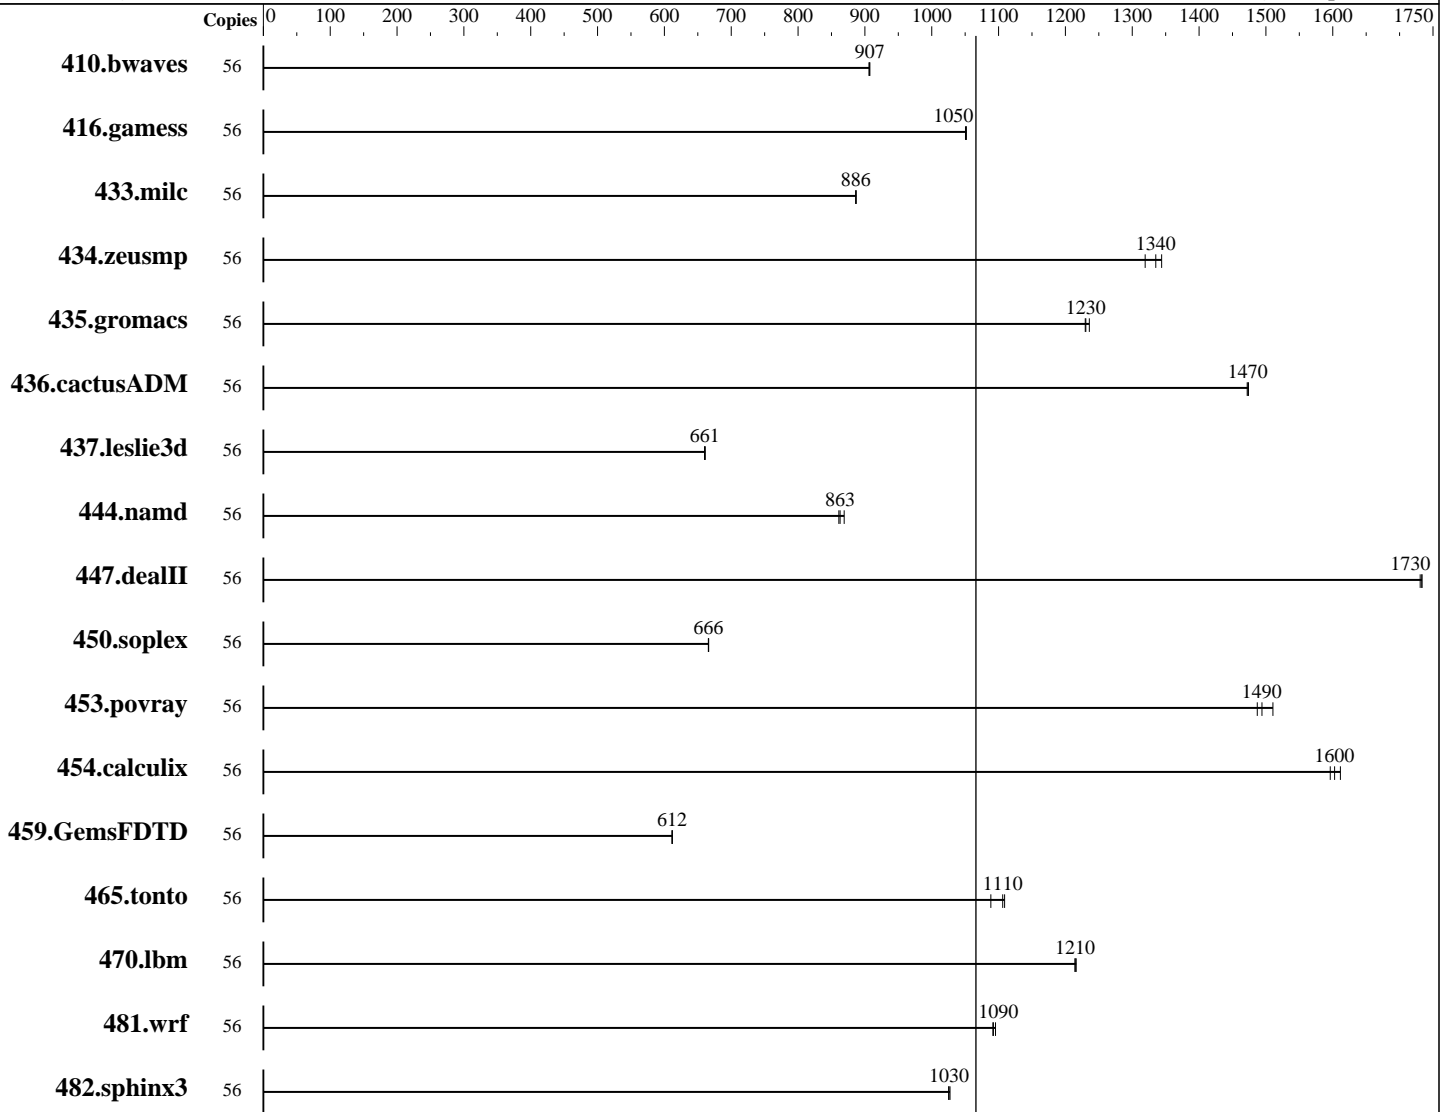

## Hardware

CPU Name: Intel Xeon Gold 5120  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.20 GHz  
 CPU MHz: 2200  
 FPU: Integrated  
 CPU(s) enabled: 28 cores, 2 chips, 14 cores/chip, 2 threads/core  
 CPU(s) orderable: 1, 2 chip(s)  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 1 MB I+D on chip per core

Continued on next page

## Software

Operating System: SUSE Linux Enterprise Server 12 (x86\_64) SP2  
 Kernel 4.4.21-69-default  
 Compiler: C/C++: Version 17.0.3.191 of Intel C/C++ Compiler for Linux;  
 Fortran: Version 17.0.3.191 of Intel Fortran Compiler for Linux  
 Auto Parallel: No  
 File System: xfs  
 System State: Run level 3 (multi-user)

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL360 Gen10

(2.20 GHz, Intel Xeon Gold 5120)

SPECfp\_rate2006 = Not Run

SPECfp\_rate\_base2006 = 1070

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Nov-2017

Hardware Availability: Oct-2017

Software Availability: Apr-2017

L3 Cache: 19.25 MB I+D on chip per chip  
Other Cache: None  
Memory: 192 GB (24 x 8 GB 2Rx8 PC4-2666V-R, running at 2400)  
Disk Subsystem: 1 x 480 GB SATA SSD, RAID 0  
Other Hardware: None

Base Pointers: 32/64-bit  
Peak Pointers: Not Applicable  
Other Software: None

## Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio		
410.bwaves	56	840	906	<b>839</b>	<b>907</b>	839	907									
416.gamess	56	<b>1043</b>	<b>1050</b>	1044	1050	1043	1050									
433.milc	56	580	886	580	887	<b>580</b>	<b>886</b>									
434.zeusmp	56	386	1320	<b>382</b>	<b>1340</b>	379	1340									
435.gromacs	56	325	1230	324	1240	<b>325</b>	<b>1230</b>									
436.cactusADM	56	<b>454</b>	<b>1470</b>	454	1470	455	1470									
437.leslie3d	56	796	661	<b>797</b>	<b>661</b>	798	660									
444.namd	56	522	861	<b>520</b>	<b>863</b>	517	869									
447.dealII	56	370	1730	<b>370</b>	<b>1730</b>	370	1730									
450.soplex	56	701	666	<b>701</b>	<b>666</b>	701	666									
453.povray	56	200	1490	197	1510	<b>199</b>	<b>1490</b>									
454.calculix	56	287	1610	<b>288</b>	<b>1600</b>	289	1600									
459.GemsFDTD	56	971	612	<b>971</b>	<b>612</b>	971	612									
465.tonto	56	506	1090	497	1110	<b>498</b>	<b>1110</b>									
470.lbm	56	<b>633</b>	<b>1210</b>	634	1210	633	1220									
481.wrf	56	573	1090	571	1100	<b>573</b>	<b>1090</b>									
482.sphinx3	56	<b>1064</b>	<b>1030</b>	1062	1030	1065	1030									

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"  
Transparent Huge Pages enabled by default  
Filesystem page cache cleared with:  
shell invocation of 'sync; echo 3 > /proc/sys/vm/drop\_caches' prior to run  
runspec command invoked through numactl i.e.:  
numactl --interleave=all runspec <etc>  
irqbalance disabled with "service irqbalance stop"

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL360 Gen10  
(2.20 GHz, Intel Xeon Gold 5120)

**SPECfp\_rate2006 = Not Run**

**SPECfp\_rate\_base2006 = 1070**

**CPU2006 license:** 3

**Test sponsor:** HPE

**Tested by:** HPE

**Test date:** Nov-2017

**Hardware Availability:** Oct-2017

**Software Availability:** Apr-2017

## Operating System Notes (Continued)

tuned profile set with "tuned-adm profile throughput-performance"  
VM Dirty ratio was set to 40 using "echo 40 > /proc/sys/vm/dirty\_ratio"  
Numa balancing was disabled using "echo 0 > /proc/sys/kernel/numa\_balancing"

## Platform Notes

### BIOS Configuration:

Thermal Configuration set to Maximum Cooling  
LLC Prefetch set to Enabled  
LLC Dead Line Allocation set to Disabled  
Memory Patrol Scrubbing set to Disabled  
Workload Profile set to General Throughput Compute  
Minimum Processor Idle Power Core C-State set to C1E  
Sysinfo program /home/specuser/cpu2006/config/sysinfo.rev6993  
Revision 6993 of 2015-11-06 (b5e8d4b4eb51ed28d7f98696cbe290c1)  
running on linux-0s5n Wed Nov 15 17:19:38 2017

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

### From /proc/cpuinfo

```
model name : Intel(R) Xeon(R) Gold 5120 CPU @ 2.20GHz
 2 "physical id"s (chips)
 56 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores : 14
  siblings  : 28
  physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14
  physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14
cache size : 19712 KB
```

### From /proc/meminfo

```
MemTotal: 197551516 kB
HugePages_Total: 0
Hugepagesize: 2048 kB
```

### From /etc/\*release\* /etc/\*version\*

```
SuSE-release:
SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 2
# This file is deprecated and will be removed in a future service pack or
release.
# Please check /etc/os-release for details about this release.
os-release:
NAME="SLES"
VERSION="12-SP2"
VERSION_ID="12.2"
```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL360 Gen10  
(2.20 GHz, Intel Xeon Gold 5120)

**SPECfp\_rate2006 = Not Run**

**SPECfp\_rate\_base2006 = 1070**

**CPU2006 license:** 3

**Test sponsor:** HPE

**Tested by:** HPE

**Test date:** Nov-2017

**Hardware Availability:** Oct-2017

**Software Availability:** Apr-2017

## Platform Notes (Continued)

PRETTY\_NAME="SUSE Linux Enterprise Server 12 SP2"

ID="sles"

ANSI\_COLOR="0;32"

CPE\_NAME="cpe:/o:suse:sles:12:sp2"

uname -a:

```
Linux linux-0s5n 4.4.21-69-default #1 SMP Tue Oct 25 10:58:20 UTC 2016
(9464f67) x86_64 x86_64 x86_64 GNU/Linux
```

run-level 3 Nov 15 11:48

SPEC is set to: /home/specuser/cpu2006

```
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sdb3       xfs   407G  168G  239G  42% /home
```

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS HPE U32 09/29/2017

Memory:

24x UNKNOWN NOT AVAILABLE 8 GB 2 rank 2666 MHz, configured at 2400 MHz

(End of data from sysinfo program)

## General Notes

Environment variables set by runspec before the start of the run:

LD\_LIBRARY\_PATH = "/home/specuser/cpu2006/lib/ia32:/home/specuser/cpu2006/lib/intel64:/home/specuser/cpu2006/sh10.2"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM  
memory using Redhat Enterprise Linux 7.2

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL360 Gen10

(2.20 GHz, Intel Xeon Gold 5120)

SPECfp\_rate2006 = Not Run

SPECfp\_rate\_base2006 = 1070

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Nov-2017

Hardware Availability: Oct-2017

Software Availability: Apr-2017

## Base Portability Flags

```

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

## Base Optimization Flags

C benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32
-qopt-mem-layout-trans=3

```

C++ benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32
-qopt-mem-layout-trans=3

```

Fortran benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch

```

Benchmarks using both Fortran and C:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32
-qopt-mem-layout-trans=3

```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.html>

<http://www.spec.org/cpu2006/flags/HPE-Platform-Flags-Intel-V1.2-SKX-revG.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.xml>

<http://www.spec.org/cpu2006/flags/HPE-Platform-Flags-Intel-V1.2-SKX-revG.xml>



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL360 Gen10  
(2.20 GHz, Intel Xeon Gold 5120)

**SPECfp\_rate2006 = Not Run**

**SPECfp\_rate\_base2006 = 1070**

**CPU2006 license:** 3

**Test sponsor:** HPE

**Tested by:** HPE

**Test date:** Nov-2017

**Hardware Availability:** Oct-2017

**Software Availability:** Apr-2017

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Tue Dec 12 17:06:41 2017 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 12 December 2017.