



# SPEC® CPU2017 Integer Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECspeed2017\_int\_base = 9.06

ThinkSystem SR950  
(2.10 GHz, Intel Xeon Platinum 8170M)

SPECspeed2017\_int\_peak = 9.34

CPU2017 License: 9017


Test Date: Oct-2017

Test Sponsor: Lenovo Global Technology

Hardware Availability: Sep-2017

Tested by: Lenovo Global Technology

Software Availability: Sep-2017

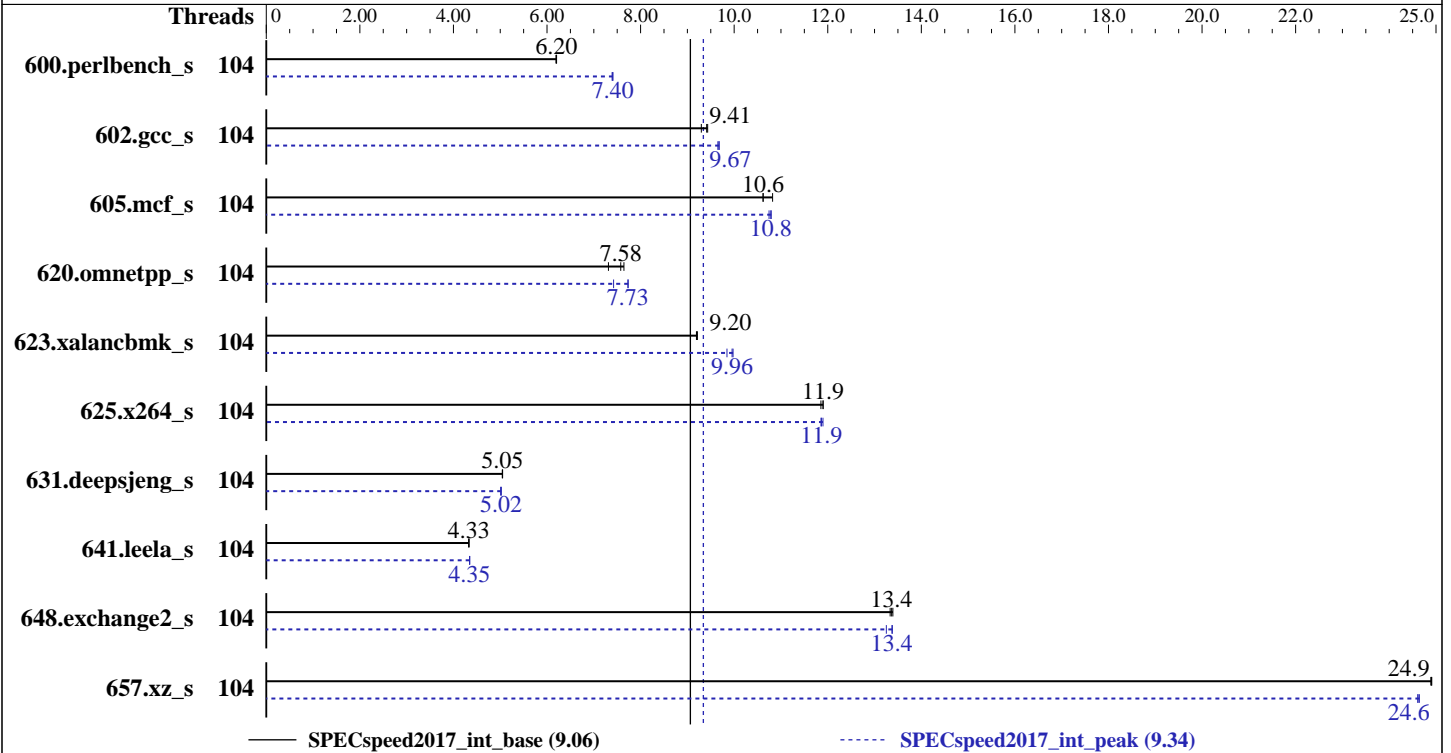

### Hardware

CPU Name: Intel Xeon Platinum 8170M  
 Max MHz.: 3700  
 Nominal: 2100  
 Enabled: 104 cores, 4 chips  
 Orderable: 2,4 chips  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 35.75 MB I+D on chip per chip  
 Other: None  
 Memory: 1536 GB (48 x 32 GB 2Rx4 PC4-2666V-R)  
 Storage: 1 x 800 GB SAS SSD  
 Other: None

### Software

OS: SUSE Linux Enterprise Server 12 SP2 (x86\_64)  
 Kernel 4.4.21-69-default  
 Compiler: C/C++: Version 18.0.0.128 of Intel C/C++  
 Compiler for Linux;  
 Fortran: Version 18.0.0.128 of Intel Fortran  
 Compiler for Linux  
 Parallel: Yes  
 Firmware: Lenovo BIOS Version PSE103K 1.00 released Jun-2017  
 File System: btrfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit  
 Other: jemalloc: jemalloc memory allocator library  
 V5.0.1;  
 jemalloc: configured and built at default for  
 32bit (i686) and 64bit (x86\_64) targets;  
 jemalloc: built with the RedHat Enterprise 7.4,  
 and the system compiler gcc 4.8.5;  
 jemalloc: sources available from jemalloc.net or  
 releases



# SPEC CPU2017 Integer Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECspeed2017\_int\_base = 9.06

ThinkSystem SR950  
(2.10 GHz, Intel Xeon Platinum 8170M)

SPECspeed2017\_int\_peak = 9.34

CPU2017 License: 9017  
Test Sponsor: Lenovo Global Technology  
Tested by: Lenovo Global Technology

Test Date: Oct-2017  
Hardware Availability: Sep-2017  
Software Availability: Sep-2017

## Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	104	<b>286</b>	<b>6.20</b>	286	6.20	287	6.19	104	<b>240</b>	<b>7.40</b>	240	7.41	240	7.39
602.gcc_s	104	428	9.30	<b>423</b>	<b>9.41</b>	422	9.43	104	<b>412</b>	<b>9.67</b>	413	9.65	411	9.68
605.mcf_s	104	436	10.8	<b>445</b>	<b>10.6</b>	445	10.6	104	437	10.8	<b>438</b>	<b>10.8</b>	439	10.7
620.omnetpp_s	104	<b>215</b>	<b>7.58</b>	223	7.31	213	7.64	104	220	7.42	<b>211</b>	<b>7.73</b>	211	7.74
623.xalancbmk_s	104	<b>154</b>	<b>9.20</b>	154	9.19	154	9.21	104	144	9.85	142	9.98	<b>142</b>	<b>9.96</b>
625.x264_s	104	149	11.9	148	11.9	<b>148</b>	<b>11.9</b>	104	<b>149</b>	<b>11.9</b>	148	11.9	149	11.9
631.deepsjeng_s	104	284	5.05	<b>284</b>	<b>5.05</b>	284	5.04	104	285	5.02	<b>286</b>	<b>5.02</b>	286	5.01
641.leela_s	104	394	4.33	<b>394</b>	<b>4.33</b>	394	4.33	104	393	4.35	392	4.35	<b>393</b>	<b>4.35</b>
648.exchange2_s	104	220	13.4	220	13.3	<b>220</b>	<b>13.4</b>	104	222	13.3	<b>220</b>	<b>13.4</b>	220	13.4
657.xz_s	104	248	24.9	<b>248</b>	<b>24.9</b>	248	24.9	104	<b>251</b>	<b>24.6</b>	251	24.6	251	24.6

SPECspeed2017\_int\_base = **9.06**

SPECspeed2017\_int\_peak = **9.34**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## General Notes

Environment variables set by runcpu before the start of the run:  
KMP\_AFFINITY = "granularity=fine,scatter"  
LD\_LIBRARY\_PATH = "/home/cpu2017.1.0.2.ic18.0/lib/ia32:/home/cpu2017.1.0.2.ic18.0/lib/intel64"  
LD\_LIBRARY\_PATH = "\$LD\_LIBRARY\_PATH:/home/cpu2017.1.0.2.ic18.0/je5.0.1-32:/home/cpu2017.1.0.2.ic18.0/je5.0.1-64"  
OMP\_STACKSIZE = "192M"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM  
memory using Redhat Enterprise Linux 7.4  
Transparent Huge Pages enabled by default  
Prior to runcpu invocation  
Filesystem page cache synced and cleared with:  
sync; echo 3> /proc/sys/vm/drop\_caches

## Platform Notes

BIOS configuration:  
Choose Operating Mode set to Maximum Performance  
Hyper-Threading set to Disable  
MONITORMWAIT set to Enable  
DCU Streamer Prefetcher set to Disable  
XPT Prefetcher set to Enable  
Stale AtoS set to Enable  
DCA set to Enable

(Continued on next page)



# SPEC CPU2017 Integer Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECspeed2017\_int\_base = 9.06

ThinkSystem SR950  
(2.10 GHz, Intel Xeon Platinum 8170M)

SPECspeed2017\_int\_peak = 9.34

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Oct-2017  
**Hardware Availability:** Sep-2017  
**Software Availability:** Sep-2017

### Platform Notes (Continued)

Trusted Execution Technology set to Enable  
LLC Deadline Alloc set to Disable  
Sysinfo program /home/cpu2017.1.1.0.2.icl8.0/bin/sysinfo  
Rev: r5797 of 2017-06-14 96c45e4568ad54c135Ed618bcc091c0f  
running on linux-uyxw Wed Oct 18 11:32:44 2017

SUT (System Under Test) info as seen by some common utilities.  
For more information on this section, see  
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) Platinum 8170M CPU @ 2.10GHz
 4 "physical id"s (chips)
104 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 26
siblings : 26
physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 16 17 18 19 20 21 22 24 25 26 27 28
29
physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 16 17 18 19 20 21 22 24 25 26 27 28
29
physical 2: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 16 17 18 19 20 21 22 24 25 26 27 28
29
physical 3: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 16 17 18 19 20 21 22 24 25 26 27 28
29
```

```
From lscpu:
Architecture: x86_64
CPU op-mode(s): 32-bit, 64-bit
Byte Order: Little Endian
CPU(s): 104
On-line CPU(s) list: 0-103
Thread(s) per core: 1
Core(s) per socket: 26
Socket(s): 4
NUMA node(s): 4
Vendor ID: GenuineIntel
CPU family: 6
Model: 85
Model name: Intel(R) Xeon(R) Platinum 8170M CPU @ 2.10GHz
Stepping: 4
CPU MHz: 2095.077
BogoMIPS: 4190.15
Virtualization: VT-x
L1d cache: 32K
L1i cache: 32K
```

(Continued on next page)



# SPEC CPU2017 Integer Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECspeed2017\_int\_base = 9.06

ThinkSystem SR950  
(2.10 GHz, Intel Xeon Platinum 8170M)

SPECspeed2017\_int\_peak = 9.34

CPU2017 License: 9017

Test Date: Oct-2017

Test Sponsor: Lenovo Global Technology

Hardware Availability: Sep-2017

Tested by: Lenovo Global Technology

Software Availability: Sep-2017

### Platform Notes (Continued)

```

L2 cache:          1024K
L3 cache:          36608K
NUMA node0 CPU(s): 0-25
NUMA node1 CPU(s): 26-51
NUMA node2 CPU(s): 52-77
NUMA node3 CPU(s): 78-103

```

```

Flags:              fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc
aperfperf eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg
fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes
xsave avx f16c rdrand lahf_lm abm 3dnowprefetch ida arat epb pln pts dtherm intel_pt
tpr_shadow vnmi flexpriority ept vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2
erms invpcid rtm cqm mpx avx512f avx512dq rdseed adx smap clflushopt clwb avx512cd
avx512bw avx512vl xsaveopt xsavec xgetbv1 cqm_llc cqm_occup_llc

```

```

/proc/cpuinfo cache data
cache size : 36608 KB

```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```

available: 4 nodes (0-3)
node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25
node 0 size: 386500 MB
node 0 free: 385385 MB
node 1 cpus: 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50
51
node 1 size: 387042 MB
node 1 free: 386010 MB
node 2 cpus: 52 53 54 55 56 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71 72 73 74 75 76
77
node 2 size: 387042 MB
node 2 free: 385743 MB
node 3 cpus: 78 79 80 81 82 83 84 85 86 87 88 89 90 91 92 93 94 95 96 97 98 99 100 101
102 103
node 3 size: 387038 MB
node 3 free: 385999 MB
node distances:
node  0  1  2  3
0:  10  21  21  21
1:  21  10  21  21
2:  21  21  10  21
3:  21  21  21  10

```

```

From /proc/meminfo
MemTotal:          1584767360 kB
HugePages_Total:      0

```

(Continued on next page)



# SPEC CPU2017 Integer Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR950  
(2.10 GHz, Intel Xeon Platinum 8170M)

SPECspeed2017\_int\_base = 9.06

SPECspeed2017\_int\_peak = 9.34

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Oct-2017  
**Hardware Availability:** Sep-2017  
**Software Availability:** Sep-2017

### Platform Notes (Continued)

Hugepagesize: 2048 kB

From /etc/\*release\* /etc/\*version\*

SuSE-release:

SUSE Linux Enterprise Server 12 (x86\_64)

VERSION = 12

PATCHLEVEL = 2

# This file is deprecated and will be removed in a future service pack or release.

# Please check /etc/os-release for details about this release.

os-release:

NAME="SLES"

VERSION="12-SP2"

VERSION\_ID="12.2"

PRETTY\_NAME="SUSE Linux Enterprise Server 12 SP2"

ID="sles"

ANSI\_COLOR="0;32"

CPE\_NAME="cpe:/o:suse:sles:12:sp2"

uname -a:

Linux linux-uyxw 4.4.21-69-default #1 SMP Tue Oct 25 10:58:20 UTC 2016 (9464f67)  
x86\_64 x86\_64 x86\_64 GNU/Linux

run-level 3 Oct 18 11:21

SPEC is set to: /home/cpu2017.1.0.2.ic18.0

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda2	btrfs	744G	19G	724G	3%	/home

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS Lenovo -[PSE103K-1.00]- 06/19/2017

Memory:

48x NO DIMM NO DIMM

48x Samsung M393A4K40BB2-CTD 32 GB 2 rank 2666

(End of data from sysinfo program)

### Compiler Version Notes

=====  
CC 600.perlbench\_s(base) 602.gcc\_s(base) 605.mcf\_s(base) 625.x264\_s(base,  
peak) 657.xz\_s(base)  
-----

icc (ICC) 18.0.0 20170811

(Continued on next page)



# SPEC CPU2017 Integer Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

**Lenovo Global Technology**

ThinkSystem SR950  
(2.10 GHz, Intel Xeon Platinum 8170M)

SPECspeed2017\_int\_base = 9.06

SPECspeed2017\_int\_peak = 9.34

**CPU2017 License:** 9017

**Test Sponsor:** Lenovo Global Technology

**Tested by:** Lenovo Global Technology

**Test Date:** Oct-2017

**Hardware Availability:** Sep-2017

**Software Availability:** Sep-2017

## Compiler Version Notes (Continued)

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====  
CC 600.perlbench\_s(peak) 602.gcc\_s(peak) 605.mcf\_s(peak) 657.xz\_s(peak)  
=====

icc (ICC) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====  
CXXC 620.omnetpp\_s(base) 623.xalancbmk\_s(base) 631.deepsjeng\_s(base)  
641.leela\_s(base)  
=====

icpc (ICC) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====  
CXXC 620.omnetpp\_s(peak) 623.xalancbmk\_s(peak) 631.deepsjeng\_s(peak)  
641.leela\_s(peak)  
=====

icpc (ICC) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====  
FC 648.exchange2\_s(base, peak)  
=====

ifort (IFORT) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

## Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort



# SPEC CPU2017 Integer Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

**Lenovo Global Technology**

ThinkSystem SR950  
(2.10 GHz, Intel Xeon Platinum 8170M)

SPECspeed2017\_int\_base = 9.06

SPECspeed2017\_int\_peak = 9.34

**CPU2017 License:** 9017

**Test Sponsor:** Lenovo Global Technology

**Tested by:** Lenovo Global Technology

**Test Date:** Oct-2017

**Hardware Availability:** Sep-2017

**Software Availability:** Sep-2017

## Base Portability Flags

```
600.perlbench_s: -DSPEC_LP64 -DSPEC_LINUX_X64
602.gcc_s: -DSPEC_LP64
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -DSPEC_LP64 -DSPEC_LINUX
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64
```

## Base Optimization Flags

C benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -qopenmp -DSPEC_OPENMP
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

C++ benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib -ljemalloc
```

Fortran benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

## Base Other Flags

C benchmarks:

```
-m64 -std=c11
```

C++ benchmarks:

```
-m64
```

Fortran benchmarks:

```
-m64
```



# SPEC CPU2017 Integer Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR950  
(2.10 GHz, Intel Xeon Platinum 8170M)

SPECspeed2017\_int\_base = 9.06

SPECspeed2017\_int\_peak = 9.34

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Oct-2017

Hardware Availability: Sep-2017

Software Availability: Sep-2017

## Peak Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

## Peak Portability Flags

```
600.perlbench_s: -DSPEC_LP64 -DSPEC_LINUX_X64
602.gcc_s: -DSPEC_LP64
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -D_FILE_OFFSET_BITS=64 -DSPEC_LINUX
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64
```

## Peak Optimization Flags

C benchmarks:

```
600.perlbench_s: -w1,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -O2
-xCORE-AVX512 -qopt-mem-layout-trans=3 -ipo -O3
-no-prec-div -DSPEC_SUPPRESS_OPENMP -qopenmp
-DSPEC_OPENMP -fno-strict-overflow
-L/usr/local/je5.0.1-64/lib -ljemalloc

602.gcc_s: -w1,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -O2
-xCORE-AVX512 -qopt-mem-layout-trans=3 -ipo -O3
-no-prec-div -DSPEC_SUPPRESS_OPENMP -qopenmp
-DSPEC_OPENMP -L/usr/local/je5.0.1-64/lib -ljemalloc

605.mcf_s: -w1,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=3
-DSPEC_SUPPRESS_OPENMP -qopenmp -DSPEC_OPENMP
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

(Continued on next page)





# SPEC CPU2017 Integer Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

**Lenovo Global Technology**

SPECspeed2017\_int\_base = 9.06

ThinkSystem SR950  
(2.10 GHz, Intel Xeon Platinum 8170M)

SPECspeed2017\_int\_peak = 9.34

**CPU2017 License:** 9017

**Test Date:** Oct-2017

**Test Sponsor:** Lenovo Global Technology

**Hardware Availability:** Sep-2017

**Tested by:** Lenovo Global Technology

**Software Availability:** Sep-2017

## Peak Optimization Flags (Continued)

625.x264\_s: -Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=3 -qopenmp -DSPEC\_OPENMP  
-L/usr/local/je5.0.1-64/lib -ljemalloc

657.xz\_s: Same as 602.gcc\_s

C++ benchmarks:

620.omnetpp\_s: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo  
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=3  
-DSPEC\_SUPPRESS\_OPENMP -qopenmp -DSPEC\_OPENMP  
-L/usr/local/je5.0.1-64/lib -ljemalloc

623.xalancbmk\_s: -L/opt/intel/compilers\_and\_libraries\_2018/linux/lib/ia32  
-Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo  
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=3  
-DSPEC\_SUPPRESS\_OPENMP -qopenmp -DSPEC\_OPENMP  
-L/usr/local/je5.0.1-32/lib -ljemalloc

631.deepsjeng\_s: Same as 620.omnetpp\_s

641.leela\_s: Same as 620.omnetpp\_s

Fortran benchmarks:

-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte  
-L/usr/local/je5.0.1-64/lib -ljemalloc

## Peak Other Flags

C benchmarks:

-m64 -std=c11

C++ benchmarks (except as noted below):

-m64

623.xalancbmk\_s: -m32

Fortran benchmarks:

-m64



# SPEC CPU2017 Integer Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR950  
(2.10 GHz, Intel Xeon Platinum 8170M)

SPECspeed2017\_int\_base = 9.06

SPECspeed2017\_int\_peak = 9.34

**CPU2017 License:** 9017

**Test Sponsor:** Lenovo Global Technology

**Tested by:** Lenovo Global Technology

**Test Date:** Oct-2017

**Hardware Availability:** Sep-2017

**Software Availability:** Sep-2017

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.html>

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-Flags-V1.2-SKL-E.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-Flags-V1.2-SKL-E.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU2017 v1.0.2 on 2017-10-17 23:32:43-0400.

Report generated on 2018-10-31 14:51:13 by CPU2017 PDF formatter v6067.

Originally published on 2017-11-22.