



# SPEC® CPU2017 Integer Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Hewlett Packard Enterprise

(Test Sponsor: HPE)

### ProLiant DL380 Gen10


(2.20 GHz, Intel Xeon Silver 4114)

SPECspeed2017\_int\_base = 7.01

SPECspeed2017\_int\_peak = Not Run

CPU2017 License: 3  
Test Sponsor: HPE  
Tested by: HPE

Test Date: Oct-2017  
Hardware Availability: Oct-2017  
Software Availability: Sep-2017

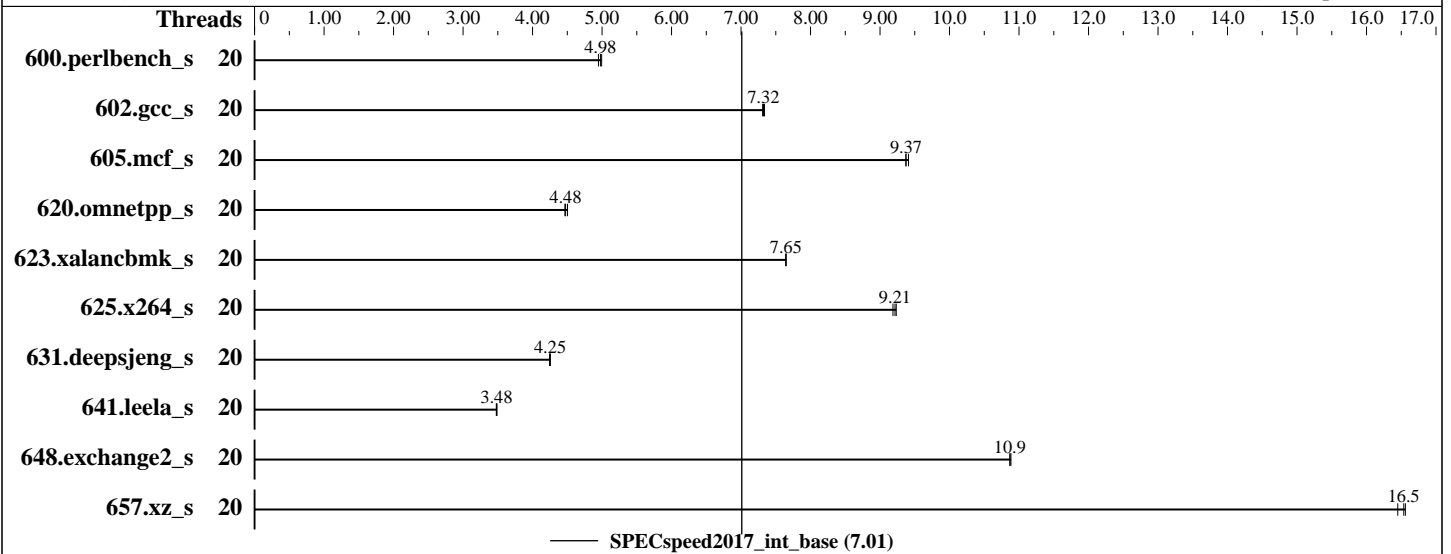

### Hardware

CPU Name: Intel Xeon Silver 4114  
Max MHz.: 3000  
Nominal: 2200  
Enabled: 20 cores, 2 chips  
Orderable: 1, 2 chip(s)  
Cache L1: 32 KB I + 32 KB D on chip per core  
L2: 1 MB I+D on chip per core  
L3: 13.75 MB I+D on chip per chip  
Other: None  
Memory: 192 GB (24 x 8 GB 2Rx8 PC4-2666V-R, running at 2400)  
Storage: 1 x 960 GB SATA SSD, RAID 0  
Other: None

### Software

OS: Red Hat Enterprise Linux Server release 7.3 (Maipo),  
Kernel 3.10.0-514.6.1.el7.x86\_64  
Compiler: C/C++: Version 18.0.0.128 of Intel C/C++ Compiler for Linux;  
Fortran: Version 18.0.0.128 of Intel Fortran Compiler for Linux  
Parallel: Yes  
Firmware: HPE BIOS Version U30 released Oct-2017 (tested with U30 9/29/2017)  
File System: xfs  
System State: Run level 3 (multi-user)  
Base Pointers: 64-bit  
Peak Pointers: Not Applicable  
Other: jemalloc: jemalloc memory allocator library V5.0.1; configured and built at default for 32bit (i686) and 64bit (x86\_64) targets; built with the RedHat Enterprise 7.4, and the system compiler gcc 4.8.5



# SPEC CPU2017 Integer Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL380 Gen10

(2.20 GHz, Intel Xeon Silver 4114)

SPECspeed2017\_int\_base = 7.01

SPECspeed2017\_int\_peak = Not Run

CPU2017 License: 3  
Test Sponsor: HPE  
Tested by: HPE

Test Date: Oct-2017  
Hardware Availability: Oct-2017  
Software Availability: Sep-2017

## Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	20	359	4.95	355	4.99	<b>357</b>	<b>4.98</b>							
602.gcc_s	20	545	7.31	543	7.34	<b>544</b>	<b>7.32</b>							
605.mcf_s	20	504	9.37	502	9.41	<b>504</b>	<b>9.37</b>							
620.omnetpp_s	20	365	4.47	362	4.50	<b>364</b>	<b>4.48</b>							
623.xalancbmk_s	20	185	7.64	185	7.65	<b>185</b>	<b>7.65</b>							
625.x264_s	20	<b>191</b>	<b>9.21</b>	191	9.23	192	9.19							
631.deepsjeng_s	20	<b>337</b>	<b>4.25</b>	337	4.25	338	4.24							
641.leela_s	20	<b>490</b>	<b>3.48</b>	489	3.49	490	3.48							
648.exchange2_s	20	270	10.9	<b>270</b>	<b>10.9</b>	270	10.9							
657.xz_s	20	<b>374</b>	<b>16.5</b>	376	16.4	373	16.6							

SPECspeed2017\_int\_base = 7.01

SPECspeed2017\_int\_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"  
Transparent Huge Pages enabled by default  
Filesystem page cache cleared with:  
shell invocation of 'sync; echo 3 > /proc/sys/vm/drop\_caches' prior to run  
irqbalance disabled with "systemctl stop irqbalance"  
tuned profile set with "tuned-adm profile throughput-performance"

## General Notes

Environment variables set by runcpu before the start of the run:  
KMP\_AFFINITY = "granularity=fine,compact"  
LD\_LIBRARY\_PATH = "/spec2017/lib/ia32:/spec2017/lib/intel64:/spec2017/je5.0.1-32"  
LD\_LIBRARY\_PATH = "\$LD\_LIBRARY\_PATH:/spec2017/je5.0.1-64"  
OMP\_STACKSIZE = "192M"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM  
memory using Redhat Enterprise Linux 7.4

## Platform Notes

BIOS Configuration:  
Intel Hyperthreading set to Disabled  
Thermal Configuration set to Maximum Cooling  
Memory Patrol Scrubbing set to Disabled  
LLC Prefetcher set to Enabled  
LLC Dead Line Allocation set to Disabled  
Workload Profile set to General Peak Frequency Compute

(Continued on next page)



# SPEC CPU2017 Integer Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant DL380 Gen10**

(2.20 GHz, Intel Xeon Silver 4114)

SPECspeed2017\_int\_base = 7.01

SPECspeed2017\_int\_peak = Not Run

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Oct-2017

**Hardware Availability:** Oct-2017

**Software Availability:** Sep-2017

## Platform Notes (Continued)

Energy/Performance Bias set to Maximum Performance  
Workload Profile set to General Peak Frequency Compute  
NUMA Group Size Optimization set to Flat

Sysinfo program /spec2017/bin/sysinfo  
Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f  
running on DL380-sys2-RHEL73 Tue Oct 17 06:23:43 2017

SUT (System Under Test) info as seen by some common utilities.  
For more information on this section, see  
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo  
model name : Intel(R) Xeon(R) Silver 4114 CPU @ 2.20GHz  
2 "physical id"s (chips)  
20 "processors"  
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)  
cpu cores : 10  
siblings : 10  
physical 0: cores 0 1 2 3 4 8 9 10 11 12  
physical 1: cores 0 1 2 3 4 8 9 10 11 12

From lscpu:  
Architecture: x86\_64  
CPU op-mode(s): 32-bit, 64-bit  
Byte Order: Little Endian  
CPU(s): 20  
On-line CPU(s) list: 0-19  
Thread(s) per core: 1  
Core(s) per socket: 10  
Socket(s): 2  
NUMA node(s): 2  
Vendor ID: GenuineIntel  
CPU family: 6  
Model: 85  
Model name: Intel(R) Xeon(R) Silver 4114 CPU @ 2.20GHz  
Stepping: 4  
CPU MHz: 2200.000  
BogoMIPS: 4405.34  
Virtualization: VT-x  
L1d cache: 32K  
L1i cache: 32K  
L2 cache: 1024K  
L3 cache: 14080K  
NUMA node0 CPU(s): 0-9  
NUMA node1 CPU(s): 10-19

(Continued on next page)



# SPEC CPU2017 Integer Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant DL380 Gen10**

(2.20 GHz, Intel Xeon Silver 4114)

SPECspeed2017\_int\_base = 7.01

SPECspeed2017\_int\_peak = Not Run

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Oct-2017

**Hardware Availability:** Oct-2017

**Software Availability:** Sep-2017

## Platform Notes (Continued)

```
/proc/cpuinfo cache data
cache size : 14080 KB
```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```
available: 2 nodes (0-1)
node 0 cpus: 0 1 2 3 4 5 6 7 8 9
node 0 size: 97964 MB
node 0 free: 94342 MB
node 1 cpus: 10 11 12 13 14 15 16 17 18 19
node 1 size: 98303 MB
node 1 free: 95614 MB
node distances:
node  0  1
  0:  10  21
  1:  21  10
```

From /proc/meminfo

```
MemTotal:      197574284 kB
HugePages_Total:      0
Hugepagesize:    2048 kB
```

From /etc/\*release\* /etc/\*version\*

```
os-release:
NAME="Red Hat Enterprise Linux Server"
VERSION="7.3 (Maipo)"
ID="rhel"
ID_LIKE="fedora"
VERSION_ID="7.3"
PRETTY_NAME="Red Hat Enterprise Linux Server 7.3 (Maipo)"
ANSI_COLOR="0;31"
CPE_NAME="cpe:/o:redhat:enterprise_linux:7.3:GA:server"
redhat-release: Red Hat Enterprise Linux Server release 7.3 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.3 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.3:ga:server
```

uname -a:

```
Linux DL380-sys2-RHEL73 3.10.0-514.6.1.el7.x86_64 #1 SMP Sat Dec 10 11:15:38 EST 2016
x86_64 x86_64 x86_64 GNU/Linux
```

run-level 3 Oct 16 14:24

SPEC is set to: /spec2017

```
Filesystem      Type      Size      Used Avail Use% Mounted on
/dev/sda4        xfs       889G      51G  839G   6% /
```

(Continued on next page)



# SPEC CPU2017 Integer Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL380 Gen10

(2.20 GHz, Intel Xeon Silver 4114)

SPECspeed2017\_int\_base = 7.01

SPECspeed2017\_int\_peak = Not Run

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Oct-2017

Hardware Availability: Oct-2017

Software Availability: Sep-2017

## Platform Notes (Continued)

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS HPE U30 09/29/2017

Memory:

24x UNKNOWN NOT AVAILABLE 8 GB 2 rank 2666, configured at 2400

(End of data from sysinfo program)

## Compiler Version Notes

=====  
CC 600.perlbench\_s(base) 602.gcc\_s(base) 605.mcf\_s(base) 625.x264\_s(base)  
657.xz\_s(base)  
=====

icc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
=====

=====  
CXXC 620.omnetpp\_s(base) 623.xalancbmk\_s(base) 631.deepsjeng\_s(base)  
641.leela\_s(base)  
=====

icpc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
=====

=====  
FC 648.exchange2\_s(base)  
=====

ifort (IFORT) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
=====

## Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort



# SPEC CPU2017 Integer Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL380 Gen10

(2.20 GHz, Intel Xeon Silver 4114)

SPECspeed2017\_int\_base = 7.01

SPECspeed2017\_int\_peak = Not Run

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Oct-2017

**Hardware Availability:** Oct-2017

**Software Availability:** Sep-2017

## Base Portability Flags

```

600.perlbench_s: -DSPEC_LP64 -DSPEC_LINUX_X64
602.gcc_s: -DSPEC_LP64
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -DSPEC_LP64 -DSPEC_LINUX
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64

```

## Base Optimization Flags

C benchmarks:

```

-Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -qopenmp -DSPEC_OPENMP
-L/usr/local/je5.0.1-64/lib -ljemalloc

```

C++ benchmarks:

```

-Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib -ljemalloc

```

Fortran benchmarks:

```

-Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte
-L/usr/local/je5.0.1-64/lib -ljemalloc

```

## Base Other Flags

C benchmarks:

-m64 -std=c11

C++ benchmarks:

-m64

Fortran benchmarks:

-m64



# SPEC CPU2017 Integer Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant DL380 Gen10**

(2.20 GHz, Intel Xeon Silver 4114)

SPECspeed2017\_int\_base = 7.01

SPECspeed2017\_int\_peak = Not Run

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Oct-2017

**Hardware Availability:** Oct-2017

**Software Availability:** Sep-2017

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-10-19.html>

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-V1.2-SKX-revD.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-10-19.xml>

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-V1.2-SKX-revD.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU2017 v1.0.2 on 2017-10-17 08:23:42-0400.

Report generated on 2018-10-31 12:58:13 by CPU2017 PDF formatter v6067.

Originally published on 2017-11-14.