



# SPEC® CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Hewlett Packard Enterprise

(Test Sponsor: HPE)

### ProLiant DL380 Gen10

(1.70 GHz, Intel Xeon Bronze 3106)

SPECrate2017\_fp\_base = 59.4

SPECrate2017\_fp\_peak = Not Run

CPU2017 License: 3


Test Sponsor: HPE

Tested by: HPE

Test Date: Nov-2017

Hardware Availability: Oct-2017

Software Availability: Sep-2017

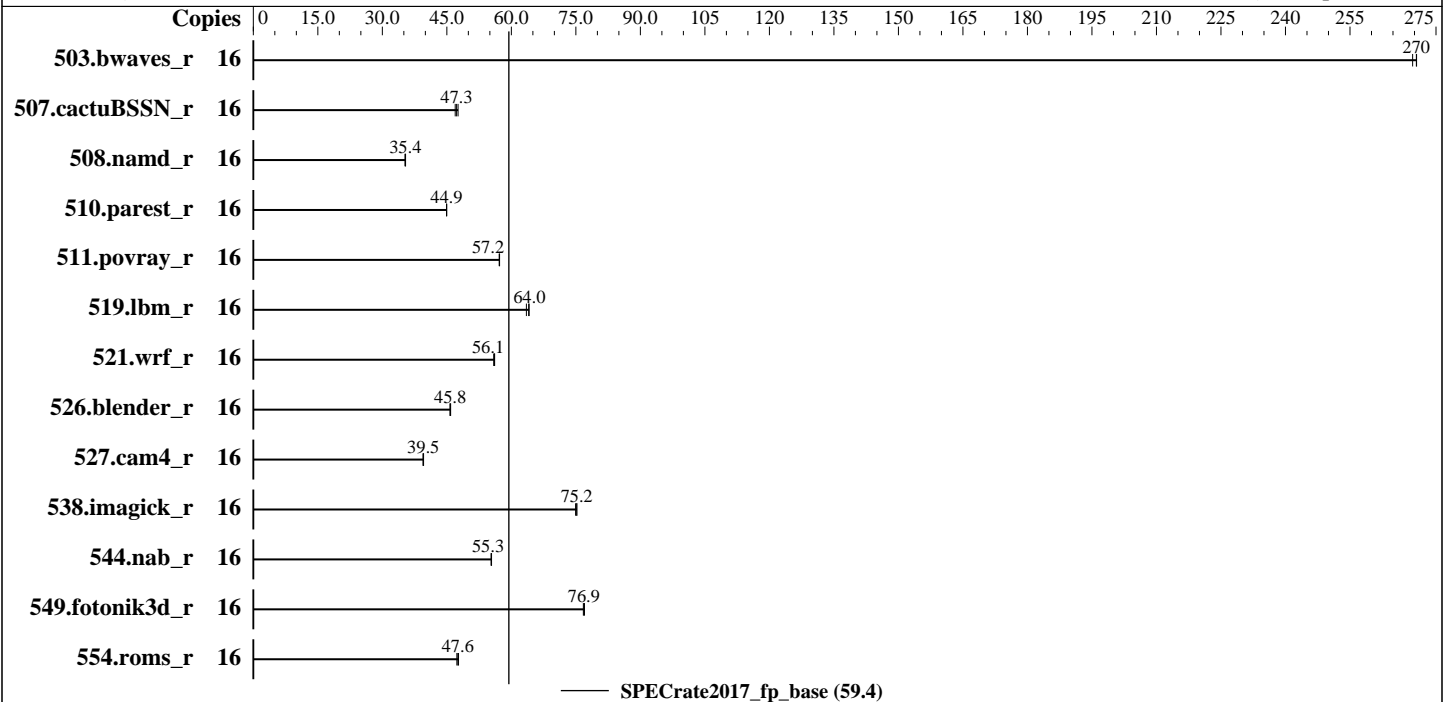

### Hardware

CPU Name: Intel Xeon Bronze 3106  
 Max MHz.: 1700  
 Nominal: 1700  
 Enabled: 16 cores, 2 chips  
 Orderable: 1, 2 chip(s)  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 11 MB I+D on chip per chip  
 Other: None  
 Memory: 192 GB (24 x 8 GB 2Rx8 PC4-2666V-R, running at 2133)  
 Storage: 1 x 960 GB SATA SSD, RAID 0  
 Other: None

### Software

OS: SUSE Linux Enterprise Server 12 (x86\_64) SP3  
 Kernel 4.4.73-5-default  
 Compiler: C/C++: Version 18.0.0.128 of Intel C/C++ Compiler for Linux;  
 Fortran: Version 18.0.0.128 of Intel Fortran Compiler for Linux  
 Parallel: No  
 Firmware: HPE BIOS Version U30 released Oct-2017 (tested with U30 9/29/2017)  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: Not Applicable  
 Other: None



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL380 Gen10

(1.70 GHz, Intel Xeon Bronze 3106)

SPECrate2017\_fp\_base = 59.4

SPECrate2017\_fp\_peak = Not Run

CPU2017 License: 3  
Test Sponsor: HPE  
Tested by: HPE

Test Date: Nov-2017  
Hardware Availability: Oct-2017  
Software Availability: Sep-2017

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	16	593	270	595	270	<b>593</b>	<b>270</b>							
507.cactuBSSN_r	16	<b>429</b>	<b>47.3</b>	432	46.9	425	47.6							
508.namd_r	16	<b>430</b>	<b>35.4</b>	429	35.4	431	35.3							
510.parest_r	16	<b>931</b>	<b>44.9</b>	931	44.9	931	44.9							
511.povray_r	16	<b>653</b>	<b>57.2</b>	653	57.2	652	57.3							
519.lbm_r	16	266	63.5	263	64.1	<b>263</b>	<b>64.0</b>							
521.wrf_r	16	639	56.1	<b>639</b>	<b>56.1</b>	641	55.9							
526.blender_r	16	533	45.7	<b>532</b>	<b>45.8</b>	531	45.9							
527.cam4_r	16	709	39.5	707	39.6	<b>708</b>	<b>39.5</b>							
538.imagick_r	16	529	75.2	531	74.9	<b>529</b>	<b>75.2</b>							
544.nab_r	16	486	55.4	487	55.3	<b>487</b>	<b>55.3</b>							
549.fotonik3d_r	16	810	77.0	813	76.7	<b>811</b>	<b>76.9</b>							
554.roms_r	16	533	47.7	537	47.3	<b>535</b>	<b>47.6</b>							

SPECrate2017\_fp\_base = 59.4

SPECrate2017\_fp\_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"  
Prior to runcpu invocation  
Filesystem page cache synced and cleared with:  
sync; echo 3> /proc/sys/vm/drop\_caches  
runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>  
irqbalance disabled with "service irqbalance stop"  
tuned profile set with "tuned-adm profile throughput-performance"  
VM Dirty ratio was set to 40 using "echo 40 > /proc/sys/vm/dirty\_ratio"  
Numa balancing was disabled using "echo 0 > /proc/sys/kernel/numa\_balancing"

## General Notes

Environment variables set by runcpu before the start of the run:  
LD\_LIBRARY\_PATH = "/home/cpu2017/lib/ia32:/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-32:/home/cpu2017/je5.0.1-64"

Binaries compiled on a system with 1x Intel Core i7-4790K CPU + 32GB RAM

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant DL380 Gen10**

(1.70 GHz, Intel Xeon Bronze 3106)

SPECrate2017\_fp\_base = 59.4

SPECrate2017\_fp\_peak = Not Run

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Nov-2017

**Hardware Availability:** Oct-2017

**Software Availability:** Sep-2017

## General Notes (Continued)

memory using Redhat Enterprise Linux 7.4

## Platform Notes

BIOS Configuration:

Thermal Configuration set to Maximum Cooling  
 LLC Prefetch set to Enabled  
 LLC Dead Line Allocation set to Disabled  
 Memory Patrol Scrubbing set to Disabled  
 Workload Profile set to General Throughput Compute  
 Minimum Processor Idle Power Core C-State set to C1E  
 Workload Profile set to Custom  
 Sub-Numa Clustering set to Disabled  
 Sysinfo program /home/cpu2017/bin/sysinfo  
 Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f  
 running on linux-b7sl Wed Nov 15 15:42:50 2017

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see  
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```

model name      : Intel(R) Xeon(R) Bronze 3106 CPU @ 1.70GHz
 2 "physical id"s (chips)
 16 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores      : 8
siblings       : 8
physical 0:    : cores 0 1 2 3 4 5 6 7
physical 1:    : cores 0 1 2 3 4 5 6 7

```

From lscpu:

```

Architecture:    x86_64
CPU op-mode(s):  32-bit, 64-bit
Byte Order:      Little Endian
CPU(s):          16
On-line CPU(s) list:  0-15
Thread(s) per core:  1
Core(s) per socket:  8
Socket(s):       2
NUMA node(s):    2
Vendor ID:       GenuineIntel
CPU family:      6
Model:           85
Model name:      Intel(R) Xeon(R) Bronze 3106 CPU @ 1.70GHz

```

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL380 Gen10

(1.70 GHz, Intel Xeon Bronze 3106)

SPECrate2017\_fp\_base = 59.4

SPECrate2017\_fp\_peak = Not Run

**CPU2017 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Nov-2017  
**Hardware Availability:** Oct-2017  
**Software Availability:** Sep-2017

## Platform Notes (Continued)

```
Stepping: 4
CPU MHz: 1696.032
BogoMIPS: 3392.06
Virtualization: VT-x
L1d cache: 32K
L1i cache: 32K
L2 cache: 1024K
L3 cache: 11264K
NUMA node0 CPU(s): 0-3,8-11
NUMA node1 CPU(s): 4-7,12-15
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc
aperfperf eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg
fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes
xsave avx f16c rdrand lahf_lm abm 3dnowprefetch arat epb pln pts dtherm intel_pt
tpr_shadow vnmi flexpriority ept vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2
erms invpcid rtm cqm mpx avx512f avx512dq rdseed adx smap clflushopt clwb avx512cd
avx512bw avx512vl xsaveopt xsavec xgetbv1 cqm_llc cqm_occup_llc pku ospke
```

```
/proc/cpuinfo cache data
cache size : 11264 KB
```

```
From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a
physical chip.
```

```
available: 2 nodes (0-1)
node 0 cpus: 0 1 2 3 8 9 10 11
node 0 size: 96349 MB
node 0 free: 89976 MB
node 1 cpus: 4 5 6 7 12 13 14 15
node 1 size: 96766 MB
node 1 free: 93962 MB
node distances:
node 0 1
0: 10 21
1: 21 10
```

```
From /proc/meminfo
MemTotal: 197750952 kB
HugePages_Total: 0
Hugepagesize: 2048 kB
```

```
/usr/bin/lsb_release -d
SUSE Linux Enterprise Server 12 SP3
```

```
From /etc/*release* /etc/*version*
SuSE-release:
```

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant DL380 Gen10**

(1.70 GHz, Intel Xeon Bronze 3106)

SPECrate2017\_fp\_base = 59.4

SPECrate2017\_fp\_peak = Not Run

**CPU2017 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Nov-2017  
**Hardware Availability:** Oct-2017  
**Software Availability:** Sep-2017

## Platform Notes (Continued)

SUSE Linux Enterprise Server 12 (x86\_64)

VERSION = 12

PATCHLEVEL = 3

# This file is deprecated and will be removed in a future service pack or release.

# Please check /etc/os-release for details about this release.

os-release:

NAME="SLES"

VERSION="12-SP3"

VERSION\_ID="12.3"

PRETTY\_NAME="SUSE Linux Enterprise Server 12 SP3"

ID="sles"

ANSI\_COLOR="0;32"

CPE\_NAME="cpe:/o:suse:sles:12:sp3"

uname -a:

Linux linux-b7s1 4.4.73-5-default #1 SMP Tue Jul 4 15:33:39 UTC 2017 (b7ce4e4) x86\_64  
x86\_64 x86\_64 GNU/Linux

run-level 3 Nov 15 10:58

SPEC is set to: /home/cpu2017

```
Filesystem      Type      Size      Used Avail Use% Mounted on
/dev/sda4        xfs       852G      40G  812G   5% /home
```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS HPE U30 10/11/2017

Memory:

24x UNKNOWN NOT AVAILABLE 8 GB 2 rank 2666, configured at 2133

(End of data from sysinfo program)

## Compiler Version Notes

=====  
CC 519.lbm\_r(base) 538.imagick\_r(base) 544.nab\_r(base)  
=====

icc (ICC) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
=====

=====  
CXXC 508.namd\_r(base) 510.parest\_r(base)  
=====

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant DL380 Gen10**

(1.70 GHz, Intel Xeon Bronze 3106)

SPECrate2017\_fp\_base = 59.4

SPECrate2017\_fp\_peak = Not Run

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Nov-2017

**Hardware Availability:** Oct-2017

**Software Availability:** Sep-2017

## Compiler Version Notes (Continued)

icpc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====  
CC 511.povray\_r(base) 526.blender\_r(base)

icpc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
icc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====  
FC 507.cactuBSSN\_r(base)

icpc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
icc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
ifort (IFORT) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====  
FC 503.bwaves\_r(base) 549.fotonik3d\_r(base) 554.roms\_r(base)

ifort (IFORT) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====  
CC 521.wrf\_r(base) 527.cam4\_r(base)

ifort (IFORT) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
icc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

## Base Compiler Invocation

C benchmarks:

icc

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen10

(1.70 GHz, Intel Xeon Bronze 3106)

SPECrate2017\_fp\_base = 59.4

SPECrate2017\_fp\_peak = Not Run

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Nov-2017

Hardware Availability: Oct-2017

Software Availability: Sep-2017

## Base Compiler Invocation (Continued)

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

ifort icc

Benchmarks using both C and C++:

icpc icc

Benchmarks using Fortran, C, and C++:

icpc icc ifort

## Base Portability Flags

503.bwaves\_r: -DSPEC\_LP64

507.cactuBSSN\_r: -DSPEC\_LP64

508.namd\_r: -DSPEC\_LP64

510.parest\_r: -DSPEC\_LP64

511.povray\_r: -DSPEC\_LP64

519.lbm\_r: -DSPEC\_LP64

521.wrf\_r: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG -convert big\_endian

526.blender\_r: -DSPEC\_LP64 -DSPEC\_LINUX -funsigned-char

527.cam4\_r: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG

538.imagick\_r: -DSPEC\_LP64

544.nab\_r: -DSPEC\_LP64

549.fotonik3d\_r: -DSPEC\_LP64

554.roms\_r: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only

-qopt-mem-layout-trans=3

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only

-qopt-mem-layout-trans=3

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL380 Gen10

(1.70 GHz, Intel Xeon Bronze 3106)

SPECrate2017\_fp\_base = 59.4

SPECrate2017\_fp\_peak = Not Run

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Nov-2017

**Hardware Availability:** Oct-2017

**Software Availability:** Sep-2017

## Base Optimization Flags (Continued)

Fortran benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte
```

Benchmarks using both Fortran and C:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte
```

Benchmarks using both C and C++:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3
```

Benchmarks using Fortran, C, and C++:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte
```

## Base Other Flags

C benchmarks:

```
-m64 -std=c11
```

C++ benchmarks:

```
-m64
```

Fortran benchmarks:

```
-m64
```

Benchmarks using both Fortran and C:

```
-m64 -std=c11
```

Benchmarks using both C and C++:

```
-m64 -std=c11
```

Benchmarks using Fortran, C, and C++:

```
-m64 -std=c11
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-10-19.html>

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-V1.2-SKX-revG.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-10-19.xml>

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-V1.2-SKX-revG.xml>





# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant DL380 Gen10**

(1.70 GHz, Intel Xeon Bronze 3106)

SPECrate2017\_fp\_base = 59.4

SPECrate2017\_fp\_peak = Not Run

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Nov-2017

**Hardware Availability:** Oct-2017

**Software Availability:** Sep-2017

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU2017 v1.0.2 on 2017-11-15 16:42:49-0500.

Report generated on 2018-10-31 14:55:08 by CPU2017 PDF formatter v6067.

Originally published on 2017-12-12.