



# SPEC® CPU2017 Integer Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Hewlett Packard Enterprise

(Test Sponsor: HPE)

### Synergy 480 Gen10


(2.50 GHz, Intel Xeon Platinum 8180M)

SPECspeed2017\_int\_base = 9.12

SPECspeed2017\_int\_peak = Not Run

**CPU2017 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Oct-2017  
**Hardware Availability:** Oct-2017  
**Software Availability:** Sep-2017

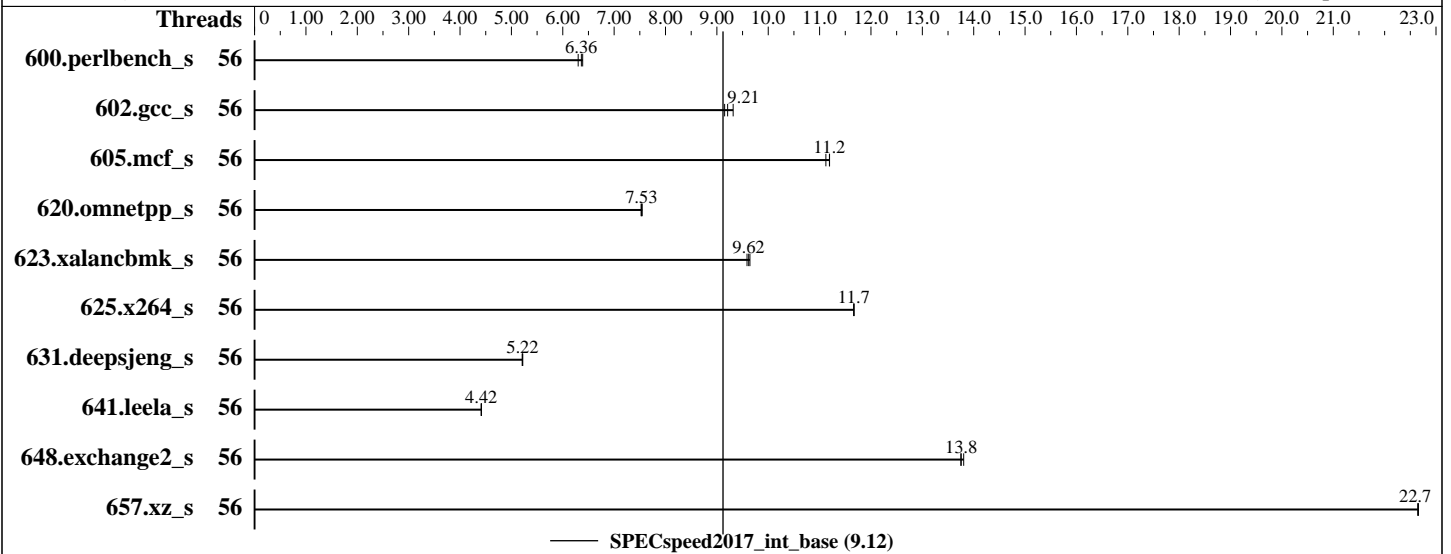

### Hardware

CPU Name: Intel Xeon Platinum 8180M  
Max MHz.: 3800  
Nominal: 2500  
Enabled: 56 cores, 2 chips  
Orderable: 1, 2 chip(s)  
Cache L1: 32 KB I + 32 KB D on chip per core  
L2: 1 MB I+D on chip per core  
L3: 38.5 MB I+D on chip per chip  
Other: None  
Memory: 384 GB (24 x 16 GB 2Rx8 PC4-2666V-R)  
Storage: 1 x 480 GB SATA SSD, RAID 0  
Other: None

### Software

OS: Red Hat Enterprise Linux Server release 7.3 (Maipo)  
Kernel 3.10.0-514.el7.x86\_64  
Compiler: C/C++: Version 18.0.0.128 of Intel C/C++ Compiler for Linux;  
Fortran: Version 18.0.0.128 of Intel Fortran Compiler for Linux  
Parallel: Yes  
Firmware: HPE BIOS Version I42 released Oct-2017 (tested with I42 9/27/2017)  
File System: xfs  
System State: Run level 3 (multi-user)  
Base Pointers: 64-bit  
Peak Pointers: Not Applicable  
Other: jemalloc: jemalloc memory allocator library V5.0.1;  
jemalloc: configured and built at default for 32bit (i686) and 64bit (x86\_64) targets;  
jemalloc: built with the RedHat Enterprise 7.4, and the system compiler gcc 4.8.5;  
jemalloc: sources available from jemalloc.net or releases



# SPEC CPU2017 Integer Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**Synergy 480 Gen10**

(2.50 GHz, Intel Xeon Platinum 8180M)

SPECspeed2017\_int\_base = 9.12

SPECspeed2017\_int\_peak = Not Run

CPU2017 License: 3  
Test Sponsor: HPE  
Tested by: HPE

Test Date: Oct-2017  
Hardware Availability: Oct-2017  
Software Availability: Sep-2017

## Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	56	282	6.30	<u>279</u>	<u>6.36</u>	278	6.39							
602.gcc_s	56	<b>432</b>	<b>9.21</b>	427	9.32	435	9.15							
605.mcf_s	56	424	11.1	<u>422</u>	<u>11.2</u>	422	11.2							
620.omnetpp_s	56	216	7.55	<u>217</u>	<u>7.53</u>	217	7.52							
623.xalancbmk_s	56	147	9.64	148	9.59	<u>147</u>	<u>9.62</u>							
625.x264_s	56	151	11.7	151	11.7	<u>151</u>	<u>11.7</u>							
631.deepsjeng_s	56	275	5.21	275	5.22	<u>275</u>	<u>5.22</u>							
641.leela_s	56	387	4.41	<b>386</b>	<b>4.42</b>	386	4.42							
648.exchange2_s	56	214	13.7	<b>214</b>	<b>13.8</b>	213	13.8							
657.xz_s	56	273	22.7	273	22.6	<u>273</u>	<u>22.7</u>							

SPECspeed2017\_int\_base = 9.12

SPECspeed2017\_int\_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
IRQ balance service was stop using "service irqbalance stop"
Tuned-adm profile was set to Throughput-Performance
```

## General Notes

```
Environment variables set by runcpu before the start of the run:
KMP_AFFINITY = "granularity=fine,compact"
LD_LIBRARY_PATH = "/home/cpu2017/lib/ia32:/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-32:/home/cpu2017/je5.0.1-64"
OMP_STACKSIZE = "192M"
```

```
Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM
memory using Redhat Enterprise Linux 7.4
```

## Platform Notes

```
BIOS Configuration:
Intel Hyperthreading set to Disabled
Thermal Configuration set to Maximum Cooling
LLC Prefetch set to Enabled
LLC Dead Line Allocation set to Disabled
Memory Patrol Scrubbing set to Disabled
Workload Profile set to General Peak Frequency Compute
```

(Continued on next page)



# SPEC CPU2017 Integer Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**Synergy 480 Gen10**

(2.50 GHz, Intel Xeon Platinum 8180M)

SPECspeed2017\_int\_base = 9.12

SPECspeed2017\_int\_peak = Not Run

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Oct-2017

**Hardware Availability:** Oct-2017

**Software Availability:** Sep-2017

## Platform Notes (Continued)

Energy/Performance Bias set to Maximum Performance  
Workload Profile set to Custom  
NUMA Group Size Optimization set to Flat  
Sysinfo program /home/cpu2017/bin/sysinfo  
Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f  
running on SY480\_Hjp\_RHEL Thu Nov 9 01:01:00 2017

SUT (System Under Test) info as seen by some common utilities.  
For more information on this section, see  
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name      : Intel(R) Xeon(R) Platinum 8180M CPU @ 2.50GHz
 2 "physical id"s (chips)
 56 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
  cpu cores      : 28
  siblings       : 28
physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
28 29 30
physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
28 29 30
```

From lscpu:

```
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:            Little Endian
CPU(s):                56
On-line CPU(s) list:   0-55
Thread(s) per core:    1
Core(s) per socket:    28
Socket(s):             2
NUMA node(s):         2
Vendor ID:             GenuineIntel
CPU family:            6
Model:                 85
Model name:            Intel(R) Xeon(R) Platinum 8180M CPU @ 2.50GHz
Stepping:              4
CPU MHz:               2500.000
BogoMIPS:              5005.35
Virtualization:        VT-x
L1d cache:             32K
L1i cache:            32K
L2 cache:              1024K
L3 cache:              39424K
NUMA node0 CPU(s):    0-27
```

(Continued on next page)



# SPEC CPU2017 Integer Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**Synergy 480 Gen10**

(2.50 GHz, Intel Xeon Platinum 8180M)

SPECspeed2017\_int\_base = 9.12

SPECspeed2017\_int\_peak = Not Run

**CPU2017 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Oct-2017  
**Hardware Availability:** Oct-2017  
**Software Availability:** Sep-2017

## Platform Notes (Continued)

NUMA node1 CPU(s): 28-55

/proc/cpuinfo cache data  
cache size : 39424 KB

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

From /proc/meminfo  
MemTotal: 395926720 kB  
HugePages\_Total: 0  
Hugepagesize: 2048 kB

From /etc/\*release\* /etc/\*version\*  
os-release:  
NAME="Red Hat Enterprise Linux Server"  
VERSION="7.3 (Maipo)"  
ID="rhel"  
ID\_LIKE="fedora"  
VERSION\_ID="7.3"  
PRETTY\_NAME="Red Hat Enterprise Linux Server 7.3 (Maipo)"  
ANSI\_COLOR="0;31"  
CPE\_NAME="cpe:/o:redhat:enterprise\_linux:7.3:GA:server"  
redhat-release: Red Hat Enterprise Linux Server release 7.3 (Maipo)  
system-release: Red Hat Enterprise Linux Server release 7.3 (Maipo)  
system-release-cpe: cpe:/o:redhat:enterprise\_linux:7.3:ga:server

uname -a:  
Linux SY480\_Hjp\_RHEL 3.10.0-514.el7.x86\_64 #1 SMP Wed Oct 19 11:24:13 EDT 2016 x86\_64  
x86\_64 x86\_64 GNU/Linux

run-level 3 Nov 9 00:57

SPEC is set to: /home/cpu2017  
Filesystem Type Size Used Avail Use% Mounted on  
/dev/mapper/rhel-home xfs 392G 28G 365G 7% /home

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS HPE I42 09/27/2017  
Memory:  
24x UNKNOWN NOT AVAILABLE 16 GB 2 rank 2666

(End of data from sysinfo program)



# SPEC CPU2017 Integer Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**Synergy 480 Gen10**

(2.50 GHz, Intel Xeon Platinum 8180M)

SPECspeed2017\_int\_base = 9.12

SPECspeed2017\_int\_peak = Not Run

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Oct-2017

**Hardware Availability:** Oct-2017

**Software Availability:** Sep-2017

## Compiler Version Notes

=====  
CC 600.perlbench\_s(base) 602.gcc\_s(base) 605.mcf\_s(base) 625.x264\_s(base)  
657.xz\_s(base)  
-----

icc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
-----

=====  
CXXC 620.omnetpp\_s(base) 623.xalancbmk\_s(base) 631.deepsjeng\_s(base)  
641.leela\_s(base)  
-----

icpc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
-----

=====  
FC 648.exchange2\_s(base)  
-----

ifort (IFORT) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
-----

## Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

## Base Portability Flags

600.perlbench\_s: -DSPEC\_LP64 -DSPEC\_LINUX\_X64  
602.gcc\_s: -DSPEC\_LP64  
605.mcf\_s: -DSPEC\_LP64  
620.omnetpp\_s: -DSPEC\_LP64  
623.xalancbmk\_s: -DSPEC\_LP64 -DSPEC\_LINUX  
625.x264\_s: -DSPEC\_LP64  
631.deepsjeng\_s: -DSPEC\_LP64

(Continued on next page)



# SPEC CPU2017 Integer Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**Synergy 480 Gen10**

(2.50 GHz, Intel Xeon Platinum 8180M)

SPECspeed2017\_int\_base = 9.12

SPECspeed2017\_int\_peak = Not Run

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Oct-2017

**Hardware Availability:** Oct-2017

**Software Availability:** Sep-2017

## Base Portability Flags (Continued)

641.leela\_s: -DSPEC\_LP64  
648.exchange2\_s: -DSPEC\_LP64  
657.xz\_s: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

-Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=3 -qopenmp -DSPEC\_OPENMP  
-L/usr/local/je5.0.1-64/lib -ljemalloc

C++ benchmarks:

-Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib -ljemalloc

Fortran benchmarks:

-Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte  
-L/usr/local/je5.0.1-64/lib -ljemalloc

## Base Other Flags

C benchmarks:

-m64 -std=c11

C++ benchmarks:

-m64

Fortran benchmarks:

-m64

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-10-19.html>

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-V1.2-SKX-revG.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-10-19.xml>

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-V1.2-SKX-revG.xml>



# SPEC CPU2017 Integer Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**Synergy 480 Gen10**

(2.50 GHz, Intel Xeon Platinum 8180M)

SPECspeed2017\_int\_base = 9.12

SPECspeed2017\_int\_peak = Not Run

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Oct-2017

**Hardware Availability:** Oct-2017

**Software Availability:** Sep-2017

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU2017 v1.0.2 on 2017-11-09 01:00:59-0500.

Report generated on 2018-10-31 14:59:16 by CPU2017 PDF formatter v6067.

Originally published on 2017-12-12.