



SPEC® CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS700-E9(Z11PP-D24) Server System
(2.10 GHz, Intel Xeon Platinum 8176)

SPECrate2017_fp_base = 233

SPECrate2017_fp_peak = 237

CPU2017 License: 9016


Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Dec-2017

Hardware Availability: Jul-2017

Software Availability: Sep-2017

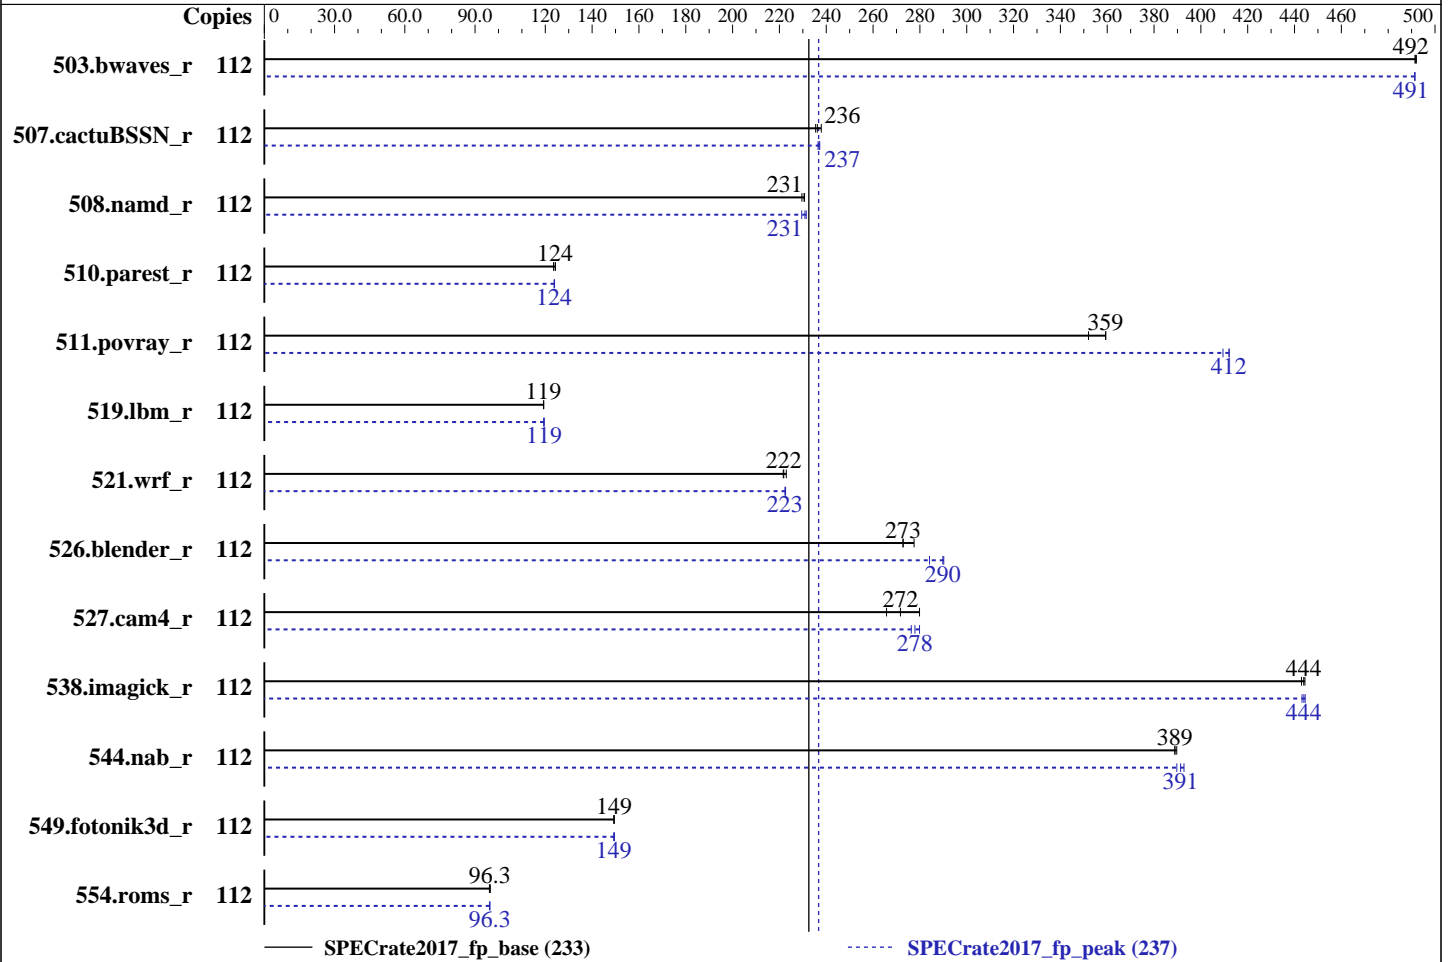

Hardware

CPU Name: Intel Xeon Platinum 8176
 Max MHz.: 3800
 Nominal: 2100
 Enabled: 56 cores, 2 chips, 2 threads/core
 Orderable: 1, 2 chip(s)
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 38.5 MB I+D on chip per chip
 Other: None
 Memory: 384 GB (24 x 16 GB 2Rx4 PC4-2666V-R)
 Storage: 1 x 960 GB SATA SSD
 Other: None

Software

OS: SUSE Linux Enterprise Server 12 (x86_64) SP2
 Kernel 4.4.21-69-default
 Compiler: C/C++: Version 18.0.0.128 of Intel C/C++ Compiler for Linux;
 Fortran: Version 18.0.0.128 of Intel Fortran Compiler for Linux
 Parallel: No
 Firmware: Version 0601 released Oct-2017
 File System: btrfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: None



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS700-E9(Z11PP-D24) Server System
(2.10 GHz, Intel Xeon Platinum 8176)

SPECrate2017_fp_base = 233

SPECrate2017_fp_peak = 237

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Dec-2017

Hardware Availability: Jul-2017

Software Availability: Sep-2017

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	112	2283	492	<u>2285</u>	<u>492</u>	2285	491	112	2286	491	2286	491	<u>2286</u>	<u>491</u>
507.cactuBSSN_r	112	602	235	<u>600</u>	<u>236</u>	596	238	112	<u>598</u>	<u>237</u>	598	237	600	236
508.namd_r	112	463	230	<u>462</u>	<u>231</u>	461	231	112	460	231	464	230	<u>461</u>	<u>231</u>
510.parest_r	112	2372	124	<u>2358</u>	<u>124</u>	2357	124	112	<u>2366</u>	<u>124</u>	2366	124	2364	124
511.povray_r	112	743	352	728	359	<u>728</u>	<u>359</u>	112	639	409	635	412	<u>635</u>	<u>412</u>
519.lbm_r	112	990	119	<u>990</u>	<u>119</u>	989	119	112	989	119	988	119	<u>988</u>	<u>119</u>
521.wrf_r	112	1132	222	1125	223	<u>1131</u>	<u>222</u>	112	1127	223	<u>1127</u>	<u>223</u>	1128	222
526.blender_r	112	<u>625</u>	<u>273</u>	625	273	615	278	112	600	284	<u>589</u>	<u>290</u>	588	290
527.cam4_r	112	737	266	700	280	<u>721</u>	<u>272</u>	112	700	280	709	276	<u>705</u>	<u>278</u>
538.imagick_r	112	629	443	<u>627</u>	<u>444</u>	627	444	112	628	443	<u>627</u>	<u>444</u>	627	445
544.nab_r	112	485	389	484	390	<u>485</u>	<u>389</u>	112	<u>482</u>	<u>391</u>	484	390	480	393
549.fotonik3d_r	112	<u>2922</u>	<u>149</u>	2921	149	2924	149	112	2919	150	2924	149	<u>2923</u>	<u>149</u>
554.roms_r	112	1851	96.1	<u>1848</u>	<u>96.3</u>	1844	96.5	112	<u>1849</u>	<u>96.3</u>	1849	96.3	1849	96.3

SPECrate2017_fp_base = 233

SPECrate2017_fp_peak = 237

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

General Notes

Environment variables set by runcpu before the start of the run:

LD_LIBRARY_PATH = "/spec2017/lib/ia32:/spec2017/lib/intel64:/spec2017/je5.0.1-32:/spec2017/je5.0.1-64"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM

memory using Redhat Enterprise Linux 7.4

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches
```

runcpu command invoked through numactl i.e.:

```
numactl --interleave=all runcpu <etc>
```



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS700-E9(Z11PP-D24) Server System
(2.10 GHz, Intel Xeon Platinum 8176)

SPECrate2017_fp_base = 233

SPECrate2017_fp_peak = 237

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Dec-2017

Hardware Availability: Jul-2017

Software Availability: Sep-2017

Platform Notes

BIOS Configuration:

SNC = Enabled

IMC interleaving = 1 way

Patrol Scrub = Disabled

VT-d = Disabled

ENERGY_PERF_BIAS_CFG mode = Performance

HyperThreading = Enabled

Sysinfo program /spec2017/bin/sysinfo

Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f

running on linux-pmm5 Sat Dec 9 04:10:53 2017

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) Platinum 8176 CPU @ 2.10GHz

2 "physical id"s (chips)

112 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 28

siblings : 56

physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
28 29 30

physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
28 29 30

From lscpu:

Architecture: x86_64

CPU op-mode(s): 32-bit, 64-bit

Byte Order: Little Endian

CPU(s): 112

On-line CPU(s) list: 0-111

Thread(s) per core: 2

Core(s) per socket: 28

Socket(s): 2

NUMA node(s): 4

Vendor ID: GenuineIntel

CPU family: 6

Model: 85

Model name: Intel(R) Xeon(R) Platinum 8176 CPU @ 2.10GHz

Stepping: 4

CPU MHz: 1585.498

CPU max MHz: 3800.0000

CPU min MHz: 1000.0000

BogoMIPS: 4200.00

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS700-E9(Z11PP-D24) Server System
(2.10 GHz, Intel Xeon Platinum 8176)

SPECrate2017_fp_base = 233

SPECrate2017_fp_peak = 237

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Dec-2017

Hardware Availability: Jul-2017

Software Availability: Sep-2017

Platform Notes (Continued)

```

Virtualization:      VT-x
L1d cache:          32K
L1i cache:          32K
L2 cache:           1024K
L3 cache:           39424K
NUMA node0 CPU(s): 0-3,7-9,14-17,21-23,56-59,63-65,70-73,77-79
NUMA node1 CPU(s): 4-6,10-13,18-20,24-27,60-62,66-69,74-76,80-83
NUMA node2 CPU(s): 28-31,35-37,42-45,49-51,84-87,91-93,98-101,105-107
NUMA node3 CPU(s): 32-34,38-41,46-48,52-55,88-90,94-97,102-104,108-111
Flags:              fpu vme de pse msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc
aperfmpperf eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg
fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes
xsave avx f16c rdrand lahf_lm abm 3dnowprefetch ida arat epb pln pts dtherm hwp
hwp_act_window hwp_epp hwp_pkg_req intel_pt tpr_shadow vnmi flexpriority ept vpid
fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm mpx avx512f
avx512dq rdseed adx smap clflushopt clwb avx512cd avx512bw avx512vl xsaveopt xsavec
xgetbv1 cqm_llc cqm_occup_llc

```

```

/proc/cpuinfo cache data
cache size : 39424 KB

```

```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a
physical chip.
available: 4 nodes (0-3)
node 0 cpus: 0 1 2 3 7 8 9 14 15 16 17 21 22 23 56 57 58 59 63 64 65 70 71 72 73 77 78
79
node 0 size: 95300 MB
node 0 free: 81330 MB
node 1 cpus: 4 5 6 10 11 12 13 18 19 20 24 25 26 27 60 61 62 66 67 68 69 74 75 76 80 81
82 83
node 1 size: 96753 MB
node 1 free: 84909 MB
node 2 cpus: 28 29 30 31 35 36 37 42 43 44 45 49 50 51 84 85 86 87 91 92 93 98 99 100
101 105 106 107
node 2 size: 96753 MB
node 2 free: 85012 MB
node 3 cpus: 32 33 34 38 39 40 41 46 47 48 52 53 54 55 88 89 90 94 95 96 97 102 103 104
108 109 110 111
node 3 size: 96750 MB
node 3 free: 84927 MB
node distances:
node  0  1  2  3
0:   10  11  21  21
1:   11  10  21  21
2:   21  21  10  11

```

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS700-E9(Z11PP-D24) Server System
(2.10 GHz, Intel Xeon Platinum 8176)

SPECrate2017_fp_base = 233

SPECrate2017_fp_peak = 237

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Dec-2017

Hardware Availability: Jul-2017

Software Availability: Sep-2017

Platform Notes (Continued)

3: 21 21 11 10

From /proc/meminfo

MemTotal: 394811180 kB
HugePages_Total: 0
Hugepagesize: 2048 kB

From /etc/*release* /etc/*version*

SuSE-release:

SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 2

This file is deprecated and will be removed in a future service pack or release.
Please check /etc/os-release for details about this release.

os-release:

NAME="SLES"
VERSION="12-SP2"
VERSION_ID="12.2"
PRETTY_NAME="SUSE Linux Enterprise Server 12 SP2"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12:sp2"

uname -a:

Linux linux-pmm5 4.4.21-69-default #1 SMP Tue Oct 25 10:58:20 UTC 2016 (9464f67)
x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Dec 8 17:52

SPEC is set to: /spec2017

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda2	btrfs	873G	83G	790G	10%	/

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS American Megatrends Inc. 0601 10/17/2017

Memory:

24x Micron 18ASF2G72PDZ-2G6D1 16 GB 2 rank 2666

(End of data from sysinfo program)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS700-E9(Z11PP-D24) Server System
(2.10 GHz, Intel Xeon Platinum 8176)

SPECrate2017_fp_base = 233

SPECrate2017_fp_peak = 237

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Dec-2017

Hardware Availability: Jul-2017

Software Availability: Sep-2017

Compiler Version Notes

=====
CC 519.lbm_r(base) 538.imagick_r(base, peak) 544.nab_r(base)

icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====
CC 519.lbm_r(peak) 544.nab_r(peak)

icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====
CXXC 508.namd_r(base) 510.parest_r(base)

icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====
CXXC 508.namd_r(peak) 510.parest_r(peak)

icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====
CC 511.povray_r(base) 526.blender_r(base)

icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====
CC 511.povray_r(peak) 526.blender_r(peak)

icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS700-E9(Z11PP-D24) Server System
(2.10 GHz, Intel Xeon Platinum 8176)

SPECrate2017_fp_base = 233

SPECrate2017_fp_peak = 237

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Dec-2017

Hardware Availability: Jul-2017

Software Availability: Sep-2017

Compiler Version Notes (Continued)

FC 507.cactuBSSN_r(base)

```
-----
icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
-----
```

=====
FC 507.cactuBSSN_r(peak)

```
-----
icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
-----
```

=====
FC 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak) 554.roms_r(base)

```
-----
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
-----
```

=====
FC 554.roms_r(peak)

```
-----
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
-----
```

=====
CC 521.wrf_r(base) 527.cam4_r(base)

```
-----
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
-----
```

=====
CC 521.wrf_r(peak) 527.cam4_r(peak)

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS700-E9(Z11PP-D24) Server System
(2.10 GHz, Intel Xeon Platinum 8176)

SPECrate2017_fp_base = 233

SPECrate2017_fp_peak = 237

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Dec-2017

Hardware Availability: Jul-2017

Software Availability: Sep-2017

Compiler Version Notes (Continued)

ifort (IFORT) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

icc (ICC) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icc -m64 -std=c11

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

ifort -m64 icc -m64 -std=c11

Benchmarks using both C and C++:

icpc -m64 icc -m64 -std=c11

Benchmarks using Fortran, C, and C++:

icpc -m64 icc -m64 -std=c11 ifort -m64

Base Portability Flags

503.bwaves_r: -DSPEC_LP64

507.cactuBSSN_r: -DSPEC_LP64

508.namd_r: -DSPEC_LP64

510.parest_r: -DSPEC_LP64

511.povray_r: -DSPEC_LP64

519.lbm_r: -DSPEC_LP64

521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian

526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char

527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG

538.imagick_r: -DSPEC_LP64

544.nab_r: -DSPEC_LP64

549.fotonik3d_r: -DSPEC_LP64

554.roms_r: -DSPEC_LP64



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS700-E9(Z11PP-D24) Server System
(2.10 GHz, Intel Xeon Platinum 8176)

SPECrate2017_fp_base = 233

SPECrate2017_fp_peak = 237

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Dec-2017

Hardware Availability: Jul-2017

Software Availability: Sep-2017

Base Optimization Flags

C benchmarks:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=3
```

C++ benchmarks:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=3
```

Fortran benchmarks:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=3 -nostandard-realloc-lhs  
-align array32byte
```

Benchmarks using both Fortran and C:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=3 -nostandard-realloc-lhs  
-align array32byte
```

Benchmarks using both C and C++:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=3
```

Benchmarks using Fortran, C, and C++:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=3 -nostandard-realloc-lhs  
-align array32byte
```

Peak Compiler Invocation

C benchmarks:

```
icc -m64 -std=c11
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
ifort -m64 icc -m64 -std=c11
```

Benchmarks using both C and C++:

```
icpc -m64 icc -m64 -std=c11
```

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS700-E9(Z11PP-D24) Server System
(2.10 GHz, Intel Xeon Platinum 8176)

SPECrate2017_fp_base = 233

SPECrate2017_fp_peak = 237

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Dec-2017

Hardware Availability: Jul-2017

Software Availability: Sep-2017

Peak Compiler Invocation (Continued)

Benchmarks using Fortran, C, and C++:

```
icpc -m64 icc -m64 -std=c11 ifort -m64
```

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

```
519.lbm_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX512
-03 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3
```

```
538.imagick_r: -xCORE-AVX512 -ipo -03 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=3
```

544.nab_r: Same as 519.lbm_r

C++ benchmarks:

```
-prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX512 -03
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3
```

Fortran benchmarks:

```
503.bwaves_r: -xCORE-AVX512 -ipo -03 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=3
-nostandard-realloc-lhs -align array32byte
```

549.fotonik3d_r: Same as 503.bwaves_r

```
554.roms_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX512
-03 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs
-align array32byte
```

Benchmarks using both Fortran and C:

```
-prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX512 -03
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte
```

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS700-E9(Z11PP-D24) Server System
(2.10 GHz, Intel Xeon Platinum 8176)

SPECrate2017_fp_base = 233

SPECrate2017_fp_peak = 237

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Dec-2017

Hardware Availability: Jul-2017

Software Availability: Sep-2017

Peak Optimization Flags (Continued)

Benchmarks using both C and C++:

```
-prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX512 -O3
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3
```

Benchmarks using Fortran, C, and C++:

```
-prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX512 -O3
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/ASUSTekPlatform-Settings-z11-V2.0-revA.html>

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-12-21.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/ASUSTekPlatform-Settings-z11-V2.0-revA.xml>

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-12-21.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU2017 v1.0.2 on 2017-12-08 15:10:53-0500.

Report generated on 2018-10-31 14:45:59 by CPU2017 PDF formatter v6067.

Originally published on 2017-12-27.