



SPEC® CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Huawei

SPECrate2017_int_base = 230

Huawei XH321 V5 (Intel Xeon Platinum 8164)

SPECrate2017_int_peak = 246

CPU2017 License: 3175


Test Sponsor: Huawei

Tested by: Huawei

Test Date: Apr-2018

Hardware Availability: Jul-2017

Software Availability: Jan-2018

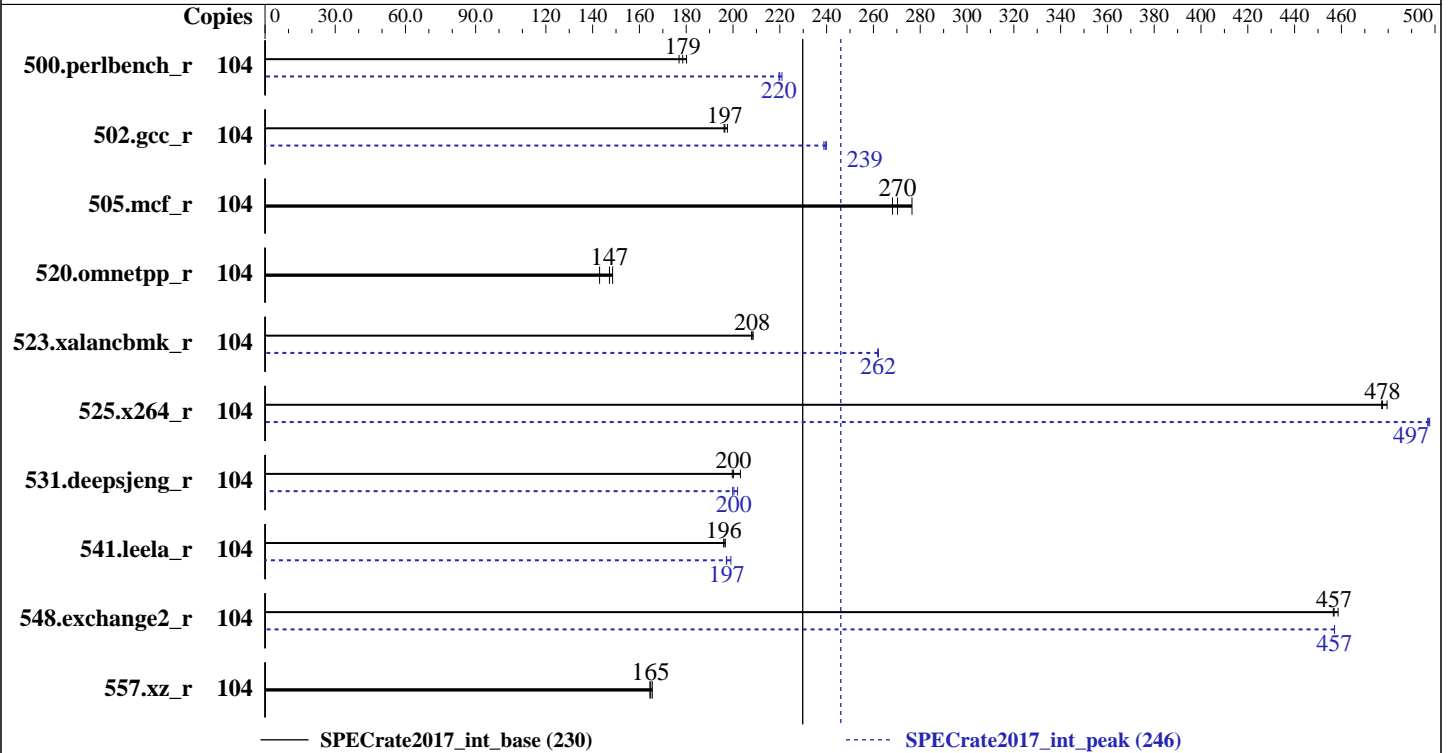

Hardware

CPU Name: Intel Xeon Platinum 8164
 Max MHz.: 3700
 Nominal: 2000
 Enabled: 52 cores, 2 chips, 2 threads/core
 Orderable: 1,2 chips
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 35.75 MB I+D on chip per chip
 Other: None
 Memory: 384 GB (12 x 32 GB 2Rx4 PC4-2666V-R)
 Storage: 1 x 1200 GB SAS, 10000 RPM
 Other: None

Software

OS: Red Hat Enterprise Linux Server release 7.3 (Maipo)
 3.10.0-693.11.6.el7.x86_64
 Compiler: C/C++: Version 18.0.0.128 of Intel C/C++ Compiler for Linux;
 Fortran: Version 18.0.0.128 of Intel Fortran Compiler for Linux
 Parallel: No
 Firmware: Version 0.59 Released Feb-2018
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit
 Other: jemalloc: jemalloc memory allocator library V5.0.1;



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Huawei

SPECrate2017_int_base = 230

Huawei XH321 V5 (Intel Xeon Platinum 8164)

SPECrate2017_int_peak = 246

CPU2017 License: 3175
Test Sponsor: Huawei
Tested by: Huawei

Test Date: Apr-2018
Hardware Availability: Jul-2017
Software Availability: Jan-2018

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	104	936	177	919	180	928	179	104	749	221	754	220	753	220
502.gcc_r	104	749	197	745	198	751	196	104	615	239	614	240	617	239
505.mcf_r	104	608	276	622	270	627	268	104	608	276	622	270	627	268
520.omnetpp_r	104	919	149	927	147	954	143	104	919	149	927	147	954	143
523.xalancbmk_r	104	526	209	528	208	528	208	104	419	262	419	262	419	262
525.x264_r	104	380	480	382	477	381	478	104	366	498	366	497	367	497
531.deepsjeng_r	104	587	203	595	200	597	200	104	595	200	590	202	596	200
541.leela_r	104	878	196	878	196	875	197	104	874	197	865	199	873	197
548.exchange2_r	104	594	459	596	457	597	457	104	596	457	596	457	596	457
557.xz_r	104	679	165	683	164	681	165	104	679	165	683	164	681	165

SPECrate2017_int_base = 230

SPECrate2017_int_peak = 246

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

General Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/spec/lib/ia32:/spec/lib/intel64:/spec/je5.0.1-32:/spec/je5.0.1-64"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM
memory using Redhat Enterprise Linux 7.4
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
jemalloc: configured and built at default for
32bit (i686) and 64bit (x86_64) targets;
jemalloc: built with the RedHat Enterprise 7.4,
and the system compiler gcc 4.8.5;
jemalloc: sources available from jemalloc.net or

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Huawei

SPECrate2017_int_base = 230

Huawei XH321 V5 (Intel Xeon Platinum 8164)

SPECrate2017_int_peak = 246

CPU2017 License: 3175

Test Sponsor: Huawei

Tested by: Huawei

Test Date: Apr-2018

Hardware Availability: Jul-2017

Software Availability: Jan-2018

General Notes (Continued)

<https://github.com/jemalloc/jemalloc/releases>

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Platform Notes

BIOS configuration:

Power Policy Set to Performance

SNC Set to Enabled

IMC Interleaving Set to 1-way Interleave

XPT Prefetch Set to Enabled

ADDDC Sparing Set to Disabled

Sysinfo program /spec/bin/sysinfo

Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f

running on localhost.localdomain Fri Apr 20 18:54:56 2018

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) Platinum 8164 CPU @ 2.00GHz

2 "physical id"s (chips)

104 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 26

siblings : 52

physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 16 17 18 19 20 21 22 24 25 26 27 28 29

physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 16 17 18 19 20 21 22 24 25 26 27 28 29

From lscpu:

Architecture: x86_64

CPU op-mode(s): 32-bit, 64-bit

Byte Order: Little Endian

CPU(s): 104

On-line CPU(s) list: 0-103

Thread(s) per core: 2

Core(s) per socket: 26

Socket(s): 2

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Huawei

SPECrate2017_int_base = 230

Huawei XH321 V5 (Intel Xeon Platinum 8164)

SPECrate2017_int_peak = 246

CPU2017 License: 3175
Test Sponsor: Huawei
Tested by: Huawei

Test Date: Apr-2018
Hardware Availability: Jul-2017
Software Availability: Jan-2018

Platform Notes (Continued)

```

NUMA node(s):          4
Vendor ID:             GenuineIntel
CPU family:            6
Model:                 85
Model name:            Intel(R) Xeon(R) Platinum 8164 CPU @ 2.00GHz
Stepping:              4
CPU MHz:               2000.000
BogoMIPS:              4004.56
Virtualization:       VT-x
L1d cache:             32K
L1i cache:             32K
L2 cache:              1024K
L3 cache:              36608K
NUMA node0 CPU(s):    0-3,7-9,13-15,20-22,52-55,59-61,65-67,72-74
NUMA node1 CPU(s):    4-6,10-12,16-19,23-25,56-58,62-64,68-71,75-77
NUMA node2 CPU(s):    26-29,33-35,39-41,46-48,78-81,85-87,91-93,98-100
NUMA node3 CPU(s):    30-32,36-38,42-45,49-51,82-84,88-90,94-97,101-103

```

```
/proc/cpuinfo cache data
cache size : 36608 KB
```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```

available: 4 nodes (0-3)
node 0 cpus: 0 1 2 3 7 8 9 13 14 15 20 21 22 52 53 54 55 59 60 61 65 66 67 72 73 74
node 0 size: 96437 MB
node 0 free: 93862 MB
node 1 cpus: 4 5 6 10 11 12 16 17 18 19 23 24 25 56 57 58 62 63 64 68 69 70 71 75 76 77
node 1 size: 98304 MB
node 1 free: 95929 MB
node 2 cpus: 26 27 28 29 33 34 35 39 40 41 46 47 48 78 79 80 81 85 86 87 91 92 93 98 99
100
node 2 size: 98304 MB
node 2 free: 95185 MB
node 3 cpus: 30 31 32 36 37 38 42 43 44 45 49 50 51 82 83 84 88 89 90 94 95 96 97 101
102 103
node 3 size: 98304 MB
node 3 free: 95902 MB
node distances:
node  0  1  2  3
 0:  10  11  21  21
 1:  11  10  21  21
 2:  21  21  10  11
 3:  21  21  11  10

```

```
From /proc/meminfo
MemTotal:      394174484 kB
```

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Huawei

SPECrate2017_int_base = 230

Huawei XH321 V5 (Intel Xeon Platinum 8164)

SPECrate2017_int_peak = 246

CPU2017 License: 3175
Test Sponsor: Huawei
Tested by: Huawei

Test Date: Apr-2018
Hardware Availability: Jul-2017
Software Availability: Jan-2018

Platform Notes (Continued)

HugePages_Total: 0
Hugepagesize: 2048 kB

From /etc/*release* /etc/*version*

os-release:

```
NAME="Red Hat Enterprise Linux Server"
VERSION="7.3 (Maipo)"
ID="rhel"
ID_LIKE="fedora"
VERSION_ID="7.3"
PRETTY_NAME="Red Hat Enterprise Linux Server 7.3 (Maipo)"
ANSI_COLOR="0;31"
CPE_NAME="cpe:/o:redhat:enterprise_linux:7.3:GA:server"
```

```
redhat-release: Red Hat Enterprise Linux Server release 7.3 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.3 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.3:ga:server
```

uname -a:

```
Linux localhost.localdomain 3.10.0-693.11.6.el7.x86_64 #1 SMP Thu Dec 28 14:23:39 EST
2017 x86_64 x86_64 x86_64 GNU/Linux
```

run-level 3 Apr 20 18:53

SPEC is set to: /spec

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda8	xfs	325G	27G	299G	9%	/

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS INSYDE Corp. 0.59 02/24/2018

Memory:

4x NO DIMM NO DIMM
12x Samsung M393A4K40BB2-CTD 32 GB 2 rank 2666

(End of data from sysinfo program)

Compiler Version Notes

=====
CC 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base, peak)
525.x264_r(base, peak) 557.xz_r(base, peak)

icc (ICC) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Huawei

SPECrate2017_int_base = 230

Huawei XH321 V5 (Intel Xeon Platinum 8164)

SPECrate2017_int_peak = 246

CPU2017 License: 3175
Test Sponsor: Huawei
Tested by: Huawei

Test Date: Apr-2018
Hardware Availability: Jul-2017
Software Availability: Jan-2018

Compiler Version Notes (Continued)

=====
CC 500.perlbench_r(peak) 502.gcc_r(peak)
=====

icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
=====

=====
CXXC 520.omnetpp_r(base) 523.xalancbmk_r(base) 531.deepsjeng_r(base)
541.leela_r(base)
=====

icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
=====

=====
CXXC 520.omnetpp_r(peak) 523.xalancbmk_r(peak) 531.deepsjeng_r(peak)
541.leela_r(peak)
=====

icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
=====

=====
FC 548.exchange2_r(base, peak)
=====

ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
=====

Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc

Fortran benchmarks:
ifort



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Huawei

SPECrate2017_int_base = 230

Huawei XH321 V5 (Intel Xeon Platinum 8164)

SPECrate2017_int_peak = 246

CPU2017 License: 3175
Test Sponsor: Huawei
Tested by: Huawei

Test Date: Apr-2018
Hardware Availability: Jul-2017
Software Availability: Jan-2018

Base Portability Flags

```
500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib -ljemalloc
```

C++ benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib -ljemalloc
```

Fortran benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

Base Other Flags

C benchmarks:

```
-m64 -std=c11
```

C++ benchmarks:

```
-m64
```

Fortran benchmarks:

```
-m64
```



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Huawei

SPECrate2017_int_base = 230

Huawei XH321 V5 (Intel Xeon Platinum 8164)

SPECrate2017_int_peak = 246

CPU2017 License: 3175

Test Sponsor: Huawei

Tested by: Huawei

Test Date: Apr-2018

Hardware Availability: Jul-2017

Software Availability: Jan-2018

Peak Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Peak Portability Flags

```
500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -D_FILE_OFFSET_BITS=64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -D_FILE_OFFSET_BITS=64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

Peak Optimization Flags

C benchmarks:

```
500.perlbench_r: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=3
-fno-strict-overflow -L/usr/local/je5.0.1-64/lib
-ljemalloc
```

```
502.gcc_r: -L/opt/intel/compilers_and_libraries_2018/linux/lib/ia32
-Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=3
-L/usr/local/je5.0.1-32/lib -ljemalloc
```

```
505.mcf_r: basepeak = yes
```

```
525.x264_r: -Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -fno-alias
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Huawei

SPECrate2017_int_base = 230

Huawei XH321 V5 (Intel Xeon Platinum 8164)

SPECrate2017_int_peak = 246

CPU2017 License: 3175

Test Sponsor: Huawei

Tested by: Huawei

Test Date: Apr-2018

Hardware Availability: Jul-2017

Software Availability: Jan-2018

Peak Optimization Flags (Continued)

557.xz_r: basepeak = yes

C++ benchmarks:

520.omnetpp_r: basepeak = yes

523.xalancbmk_r: -L/opt/intel/compilers_and_libraries_2018/linux/lib/ia32
-Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=3
-L/usr/local/je5.0.1-32/lib -ljemalloc

531.deepsjeng_r: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=3
-L/usr/local/je5.0.1-64/lib -ljemalloc

541.leela_r: Same as 531.deepsjeng_r

Fortran benchmarks:

-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte
-L/usr/local/je5.0.1-64/lib -ljemalloc

Peak Other Flags

C benchmarks (except as noted below):

-m64 -std=c11

502.gcc_r: -m32 -std=c11

C++ benchmarks (except as noted below):

-m64

523.xalancbmk_r: -m32

Fortran benchmarks:

-m64

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.html>

<http://www.spec.org/cpu2017/flags/Huawei-Platform-Settings-SKL-V1.9-revC.html>



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Huawei

SPECrate2017_int_base = 230

Huawei XH321 V5 (Intel Xeon Platinum 8164)

SPECrate2017_int_peak = 246

CPU2017 License: 3175

Test Sponsor: Huawei

Tested by: Huawei

Test Date: Apr-2018

Hardware Availability: Jul-2017

Software Availability: Jan-2018

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/Huawei-Platform-Settings-SKL-V1.9-revC.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU2017 v1.0.2 on 2018-04-20 18:54:55-0400.

Report generated on 2018-10-31 17:53:57 by CPU2017 PDF formatter v6067.

Originally published on 2018-06-12.