



SPEC® CPU2017 Integer Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Huawei

Huawei 5288 V5 (Intel Xeon Platinum 8164)

CPU2017 License: 3175


Test Sponsor: Huawei

Tested by: Huawei

Test Date: Nov-2016

Hardware Availability: Jul-2017

Software Availability: Feb-2018

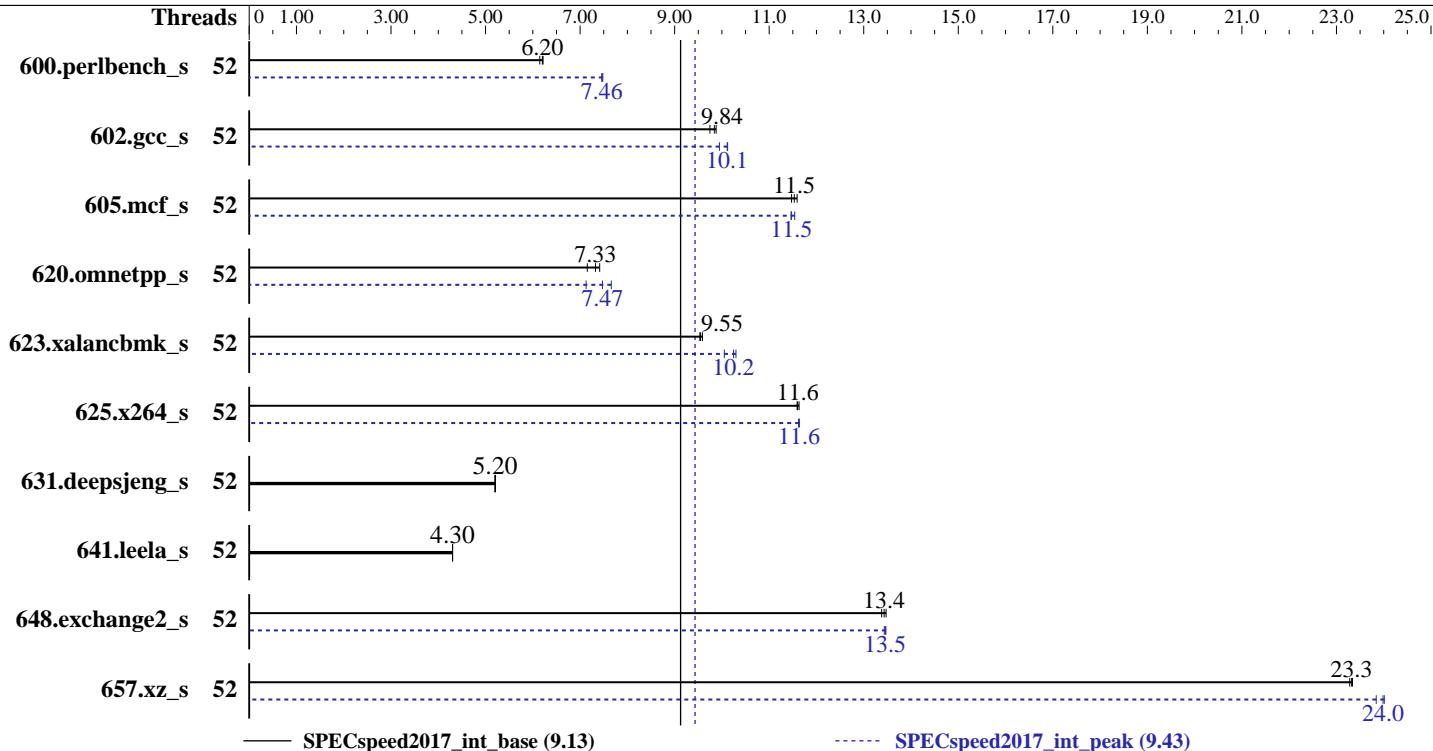

Hardware

CPU Name: Intel Xeon Platinum 8164
 Max MHz.: 3700
 Nominal: 2000
 Enabled: 52 cores, 2 chips
 Orderable: 1,2 chips
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 35.75 MB I+D on chip per chip
 Other: None
 Memory: 384 GB (24 x 16 GB 2Rx8 PC4-2666V-R)
 Storage: 1 x 1200 GB SAS, 10000 RPM
 Other: None

Software

OS: SUSE Linux Enterprise Server 12 SP2 (x86_64) 4.4.114-92.64-default
 Compiler: C/C++: Version 18.0.0.128 of Intel C/C++ Compiler for Linux;
 Fortran: Version 18.0.0.128 of Intel Fortran Compiler for Linux
 Parallel: Yes
 Firmware: Version 0.62 Released Mar-2018
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit
 Other: jemalloc: jemalloc memory allocator library V5.0.1;



SPEC CPU2017 Integer Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Huawei

SPECSpeed2017_int_base = 9.13

Huawei 5288 V5 (Intel Xeon Platinum 8164)

SPECSpeed2017_int_peak = 9.43

CPU2017 License: 3175

Test Date: Nov-2016

Test Sponsor: Huawei

Hardware Availability: Jul-2017

Tested by: Huawei

Software Availability: Feb-2018

Results Table

| Benchmark | Base | | | | | | | | Peak | | | | | | | |
|-------------------------------|---------|------------|-------------|------------|-------------|------------|-------------|---------|------------|-------------|------------|-------------|------------|-------------|---------|-------|
| | Threads | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio | Threads | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio |
| 600.perlbench_s | 52 | 286 | 6.20 | 286 | 6.22 | 289 | 6.15 | 52 | 237 | 7.48 | 238 | 7.46 | 238 | 7.46 | | |
| 602.gcc_s | 52 | 409 | 9.75 | 405 | 9.84 | 403 | 9.88 | 52 | 400 | 9.95 | 394 | 10.1 | 393 | 10.1 | | |
| 605.mcf_s | 52 | 407 | 11.6 | 409 | 11.5 | 411 | 11.5 | 52 | 409 | 11.5 | 412 | 11.5 | 412 | 11.5 | | |
| 620.omnetpp_s | 52 | 228 | 7.15 | 220 | 7.41 | 223 | 7.33 | 52 | 218 | 7.47 | 229 | 7.13 | 213 | 7.66 | | |
| 623.xalancbmk_s | 52 | 149 | 9.53 | 148 | 9.59 | 148 | 9.55 | 52 | 138 | 10.2 | 138 | 10.3 | 141 | 10.1 | | |
| 625.x264_s | 52 | 152 | 11.6 | 152 | 11.6 | 152 | 11.6 | 52 | 152 | 11.6 | 152 | 11.6 | 152 | 11.6 | | |
| 631.deepsjeng_s | 52 | 275 | 5.21 | 276 | 5.20 | 275 | 5.20 | 52 | 275 | 5.21 | 276 | 5.20 | 275 | 5.20 | | |
| 641.leela_s | 52 | 396 | 4.30 | 397 | 4.30 | 397 | 4.30 | 52 | 396 | 4.30 | 397 | 4.30 | 397 | 4.30 | | |
| 648.exchange2_s | 52 | 219 | 13.4 | 220 | 13.4 | 218 | 13.5 | 52 | 218 | 13.5 | 219 | 13.4 | 218 | 13.5 | | |
| 657.xz_s | 52 | 266 | 23.3 | 265 | 23.3 | 265 | 23.3 | 52 | 259 | 23.8 | 257 | 24.0 | 258 | 24.0 | | |
| SPECSpeed2017_int_base = 9.13 | | | | | | | | | | | | | | | | |
| SPECSpeed2017_int_peak = 9.43 | | | | | | | | | | | | | | | | |

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

General Notes

Environment variables set by runcpu before the start of the run:

KMP_AFFINITY = "granularity=fine,scatter"

LD_LIBRARY_PATH = "/spec2017/lib/ia32:/spec2017/lib/intel64:/spec2017/je5.0.1-32:/spec2017/je5.0.1-64"
OMP_STACKSIZE = "192M"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM
memory using Redhat Enterprise Linux 7.4

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

sync; echo 3 > /proc/sys/vm/drop_caches

jemalloc: configured and built at default for

32bit (i686) and 64bit (x86_64) targets;

jemalloc: built with the RedHat Enterprise 7.4,
and the system compiler gcc 4.8.5;

jemalloc: sources available from jemalloc.net or
<https://github.com/jemalloc/jemalloc/releases>

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.



SPEC CPU2017 Integer Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Huawei

SPECspeed2017_int_base = 9.13

Huawei 5288 V5 (Intel Xeon Platinum 8164)

SPECspeed2017_int_peak = 9.43

CPU2017 License: 3175

Test Date: Nov-2016

Test Sponsor: Huawei

Hardware Availability: Jul-2017

Tested by: Huawei

Software Availability: Feb-2018

Platform Notes

BIOS configuration:

Power Efficiency Mode Set to Load Balance

Hyper-Threading Set to Disable

XPT Prefetch Set to Enabled

Sysinfo program /spec2017/bin/sysinfo

Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f
running on linux-2gz1 Sun Nov 6 03:28:27 2016

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : Intel(R) Xeon(R) Platinum 8164 CPU @ 2.00GHz
  2 "physical id"s (chips)
  52 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
  cpu cores : 26
  siblings   : 26
  physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 16 17 18 19 20 21 22 24 25 26 27 28
  29
  physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 16 17 18 19 20 21 22 24 25 26 27 28
  29
```

From lscpu:

```
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:            Little Endian
CPU(s):                52
On-line CPU(s) list:  0-51
Thread(s) per core:   1
Core(s) per socket:   26
Socket(s):             2
NUMA node(s):          2
Vendor ID:             GenuineIntel
CPU family:            6
Model:                 85
Model name:            Intel(R) Xeon(R) Platinum 8164 CPU @ 2.00GHz
Stepping:               4
CPU MHz:                1000.000
CPU max MHz:           2001.0000
CPU min MHz:           1000.0000
BogoMIPS:              4000.01
Virtualization:        VT-x
L1d cache:              32K
L1i cache:              32K
```

(Continued on next page)



SPEC CPU2017 Integer Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Huawei

SPECspeed2017_int_base = 9.13

Huawei 5288 V5 (Intel Xeon Platinum 8164)

SPECspeed2017_int_peak = 9.43

CPU2017 License: 3175

Test Date: Nov-2016

Test Sponsor: Huawei

Hardware Availability: Jul-2017

Tested by: Huawei

Software Availability: Feb-2018

Platform Notes (Continued)

```
L2 cache: 1024K
L3 cache: 36608K
NUMA node0 CPU(s): 0-25
NUMA node1 CPU(s): 26-51
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc
aperfmperf eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg
fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes
xsave avx f16c rdrand lahf_lm abm 3dnowprefetch ida arat epb invpcid_single pln pts
dtherm intel_pt rsb_ctxtsw spec_ctrl retrpline kaiser tpr_shadow vnmi flexpriority
ept vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm mpk
avx512f avx512dq rdseed adx smap clflushopt clwb avx512cd avx512bw avx512vl xsaveopt
xsavec xgetbv1 cqmq_llc cqmq_occup_llc
```

```
/proc/cpuinfo cache data
cache size : 36608 KB
```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```
available: 2 nodes (0-1)
node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25
node 0 size: 191528 MB
node 0 free: 191011 MB
node 1 cpus: 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50
51
node 1 size: 193382 MB
node 1 free: 192927 MB
node distances:
node 0 1
 0: 10 21
 1: 21 10
```

From /proc/meminfo

```
MemTotal: 394149468 kB
HugePages_Total: 0
Hugepagesize: 2048 kB
```

From /etc/*release* /etc/*version*

```
SuSE-release:
SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 2
# This file is deprecated and will be removed in a future service pack or release.
# Please check /etc/os-release for details about this release.
os-release:
NAME="SLES"
```

(Continued on next page)



SPEC CPU2017 Integer Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Huawei

SPECSpeed2017_int_base = 9.13

Huawei 5288 V5 (Intel Xeon Platinum 8164)

SPECSpeed2017_int_peak = 9.43

CPU2017 License: 3175

Test Date: Nov-2016

Test Sponsor: Huawei

Hardware Availability: Jul-2017

Tested by: Huawei

Software Availability: Feb-2018

Platform Notes (Continued)

```
VERSION="12-SP2"
VERSION_ID="12.2"
PRETTY_NAME="SUSE Linux Enterprise Server 12 SP2"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12:sp2"
```

uname -a:

```
Linux linux-2gz1 4.4.114-92.64-default #1 SMP Thu Feb 1 19:18:19 UTC 2018 (c6ce5db)
x86_64 x86_64 x86_64 GNU/Linux
```

run-level 3 Nov 6 03:19

SPEC is set to: /spec2017

| Filesystem | Type | Size | Used | Avail | Use% | Mounted on |
|------------|------|------|------|-------|------|------------|
| /dev/sda3 | xfs | 269G | 23G | 246G | 9% | / |

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS INSYDE Corp. 0.62 03/26/2018

Memory:

```
24x Samsung M393A2K43BB1-CTD 16 GB 2 rank 2666
```

(End of data from sysinfo program)

Compiler Version Notes

```
=====
CC 600.perlbench_s(base) 602.gcc_s(base) 605.mcf_s(base) 625.x264_s(base,
peak) 657.xz_s(base)
-----
```

```
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
-----
```

```
=====
CC 600.perlbench_s(peak) 602.gcc_s(peak) 605.mcf_s(peak) 657.xz_s(peak)
-----
```

```
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
-----
```

```
=====
CXXC 620.omnetpp_s(base) 623.xalancbmk_s(base) 631.deepsjeng_s(base)
```

(Continued on next page)



SPEC CPU2017 Integer Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Huawei

Huawei 5288 V5 (Intel Xeon Platinum 8164)

SPECSPEED2017_int_base = 9.13

SPECSPEED2017_int_peak = 9.43

CPU2017 License: 3175

Test Date: Nov-2016

Test Sponsor: Huawei

Hardware Availability: Jul-2017

Tested by: Huawei

Software Availability: Feb-2018

Compiler Version Notes (Continued)

641.leela_s(base)

```
-----  
icpc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
-----
```

```
=====  
CXXC 620.omnetpp_s(peak) 623.xalancbmk_s(peak) 631.deepsjeng_s(peak)  
641.leela_s(peak)  
-----
```

```
icpc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
-----
```

```
=====  
FC 648.exchange2_s(base, peak)  
-----
```

```
ifort (IFORT) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
-----
```

Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Base Portability Flags

600.perlbench_s: -DSPEC_LP64 -DSPEC_LINUX_X64
602.gcc_s: -DSPEC_LP64
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -DSPEC_LP64 -DSPEC_LINUX
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64

(Continued on next page)



SPEC CPU2017 Integer Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Huawei

Huawei 5288 V5 (Intel Xeon Platinum 8164)

SPECSPEED2017_int_base = 9.13

SPECSPEED2017_int_peak = 9.43

CPU2017 License: 3175

Test Sponsor: Huawei

Tested by: Huawei

Test Date: Nov-2016

Hardware Availability: Jul-2017

Software Availability: Feb-2018

Base Portability Flags (Continued)

657.xz_s: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div  
-fopt-mem-layout-trans=3 -fopenmp -DSPEC_OPENMP  
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

C++ benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div  
-fopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib -ljemalloc
```

Fortran benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div  
-fopt-mem-layout-trans=3 -fno-standard-realloc-lhs -falign array32byte  
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

Base Other Flags

C benchmarks:

```
-m64 -std=c11
```

C++ benchmarks:

```
-m64
```

Fortran benchmarks:

```
-m64
```

Peak Compiler Invocation

C benchmarks:

```
icc
```

C++ benchmarks:

```
icpc
```

Fortran benchmarks:

```
ifort
```



SPEC CPU2017 Integer Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Huawei

SPECspeed2017_int_base = 9.13

Huawei 5288 V5 (Intel Xeon Platinum 8164)

SPECspeed2017_int_peak = 9.43

CPU2017 License: 3175

Test Date: Nov-2016

Test Sponsor: Huawei

Hardware Availability: Jul-2017

Tested by: Huawei

Software Availability: Feb-2018

Peak Portability Flags

```
600.perlbench_s: -DSPEC_LP64 -DSPEC_LINUX_X64  
602.gcc_s: -DSPEC_LP64  
605.mcf_s: -DSPEC_LP64  
620.omnetpp_s: -DSPEC_LP64  
623.xalancbmk_s: -D_FILE_OFFSET_BITS=64 -DSPEC_LINUX  
625.x264_s: -DSPEC_LP64  
631.deepsjeng_s: -DSPEC_LP64  
641.leela_s: -DSPEC_LP64  
648.exchange2_s: -DSPEC_LP64  
657.xz_s: -DSPEC_LP64
```

Peak Optimization Flags

C benchmarks:

```
600.perlbench_s: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -O2  
-xCORE-AVX2 -qopt-mem-layout-trans=3 -ipo -O3  
-no-prec-div -DSPEC_SUPPRESS_OPENMP -qopenmp  
-DSPEC_OPENMP -fno-strict-overflow  
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

```
602.gcc_s: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -O2  
-xCORE-AVX2 -qopt-mem-layout-trans=3 -ipo -O3  
-no-prec-div -DSPEC_SUPPRESS_OPENMP -qopenmp  
-DSPEC_OPENMP -L/usr/local/je5.0.1-64/lib -ljemalloc
```

```
605.mcf_s: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo  
-xCORE-AVX2 -O3 -no-prec-div -qopt-mem-layout-trans=3  
-DSPEC_SUPPRESS_OPENMP -qopenmp -DSPEC_OPENMP  
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

```
625.x264_s: -Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=3 -qopenmp -DSPEC_OPENMP  
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

657.xz_s: Same as 602.gcc_s

C++ benchmarks:

```
620.omnetpp_s: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo  
-xCORE-AVX2 -O3 -no-prec-div -qopt-mem-layout-trans=3  
-DSPEC_SUPPRESS_OPENMP -qopenmp -DSPEC_OPENMP  
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

(Continued on next page)



SPEC CPU2017 Integer Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Huawei

Huawei 5288 V5 (Intel Xeon Platinum 8164)

SPECspeed2017_int_base = 9.13

SPECspeed2017_int_peak = 9.43

CPU2017 License: 3175

Test Sponsor: Huawei

Tested by: Huawei

Test Date: Nov-2016

Hardware Availability: Jul-2017

Software Availability: Feb-2018

Peak Optimization Flags (Continued)

```
623.xalancbmk_s: -L/opt/intel/compilers_and_libraries_2018/linux/lib/ia32  
-Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo  
-xCORE-AVX2 -O3 -no-prec-div -qopt-mem-layout-trans=3  
-DSPEC_SUPPRESS_OPENMP -qopenmp -DSPEC_OPENMP  
-L/usr/local/je5.0.1-32/lib -ljemalloc
```

```
631.deepsjeng_s: basepeak = yes
```

```
641.leela_s: basepeak = yes
```

Fortran benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte  
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

Peak Other Flags

C benchmarks:

```
-m64 -std=c11
```

C++ benchmarks (except as noted below):

```
-m64
```

```
623.xalancbmk_s: -m32
```

Fortran benchmarks:

```
-m64
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.html>

<http://www.spec.org/cpu2017/flags/Huawei-Platform-Settings-SKL-V1.9-revC.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/Huawei-Platform-Settings-SKL-V1.9-revC.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU2017 v1.0.2 on 2016-11-06 03:28:26-0500.

Report generated on 2018-10-31 17:26:49 by CPU2017 PDF formatter v6067.

Originally published on 2018-06-26.