



SPEC® CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Supermicro

SuperServer 5019P-MT (X11SPi-TF , Intel Xeon Platinum 8180)

SPECrate2017_fp_base = 109

SPECrate2017_fp_peak = 111

CPU2017 License: 001176


Test Date: Jun-2018

Test Sponsor: Supermicro

Hardware Availability: Jul-2017

Tested by: Supermicro

Software Availability: Feb-2018

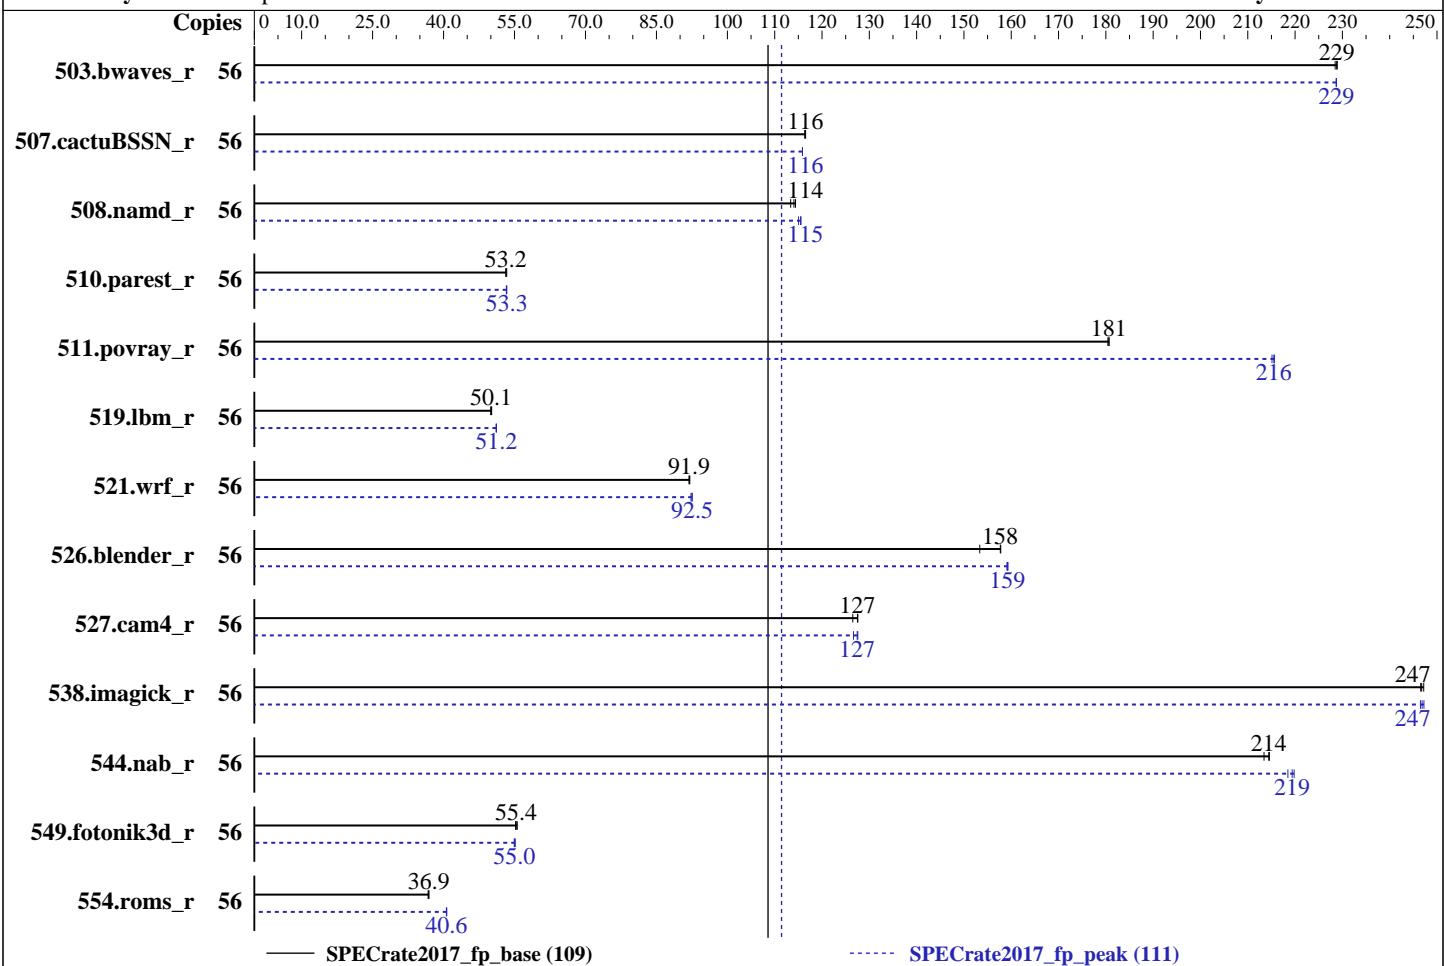

— SPECrate2017_fp_base (109)

- - - - - SPECrate2017_fp_peak (111)

Hardware

CPU Name: Intel Xeon Platinum 8180
 Max MHz.: 3800
 Nominal: 2500
 Enabled: 28 cores, 1 chip, 2 threads/core
 Orderable: 1 chip
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 38.5 MB I+D on chip per chip
 Other: None
 Memory: 192 GB (6 x 32 GB 2Rx4 PC4-2666V-R)
 Storage: 1 x 200 GB SATAIII SSD
 Other: None

OS: SUSE Linux Enterprise Server 12 SP3 (x86_64)
 Compiler: Kernel 4.4.114-94.11-default
 C/C++: Version 18.0.0.128 of Intel C/C++
 Compiler for Linux;
 Fortran: Version 18.0.0.128 of Intel Fortran
 Compiler for Linux
 Parallel: No
 Firmware: Supermicro BIOS version 2.0b released Feb-2018
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: None



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Supermicro

SuperServer 5019P-MT (X11SPi-TF , Intel Xeon Platinum 8180)

SPECrate2017_fp_base = 109

SPECrate2017_fp_peak = 111

CPU2017 License: 001176

Test Date: Jun-2018

Test Sponsor: Supermicro

Hardware Availability: Jul-2017

Tested by: Supermicro

Software Availability: Feb-2018

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	56	2458	228	2453	229	2454	229	56	2455	229	2455	229	2456	229
507.cactuBSSN_r	56	608	117	609	116	609	116	56	612	116	612	116	612	116
508.namd_r	56	466	114	469	113	465	114	56	462	115	461	115	460	116
510.parest_r	56	2754	53.2	2746	53.4	2754	53.2	56	2750	53.3	2746	53.3	2746	53.3
511.povray_r	56	725	180	724	181	724	181	56	608	215	607	216	606	216
519.lbm_r	56	1181	50.0	1178	50.1	1176	50.2	56	1155	51.1	1153	51.2	1153	51.2
521.wrf_r	56	1363	92.1	1365	91.9	1365	91.9	56	1359	92.3	1355	92.6	1356	92.5
526.blender_r	56	556	153	541	158	541	158	56	536	159	535	159	536	159
527.cam4_r	56	768	128	774	127	768	127	56	768	128	769	127	773	127
538.imagick_r	56	564	247	563	247	565	247	56	563	247	565	247	564	247
544.nab_r	56	439	215	440	214	442	213	56	429	220	431	218	430	219
549.fotonik3d_r	56	3926	55.6	3941	55.4	3952	55.2	56	3957	55.2	3967	55.0	3973	54.9
554.roms_r	56	2412	36.9	2422	36.7	2414	36.9	56	2192	40.6	2191	40.6	2187	40.7

SPECrate2017_fp_base = 109

SPECrate2017_fp_peak = 111

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

General Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH = "/home/cpu2017/lib/ia32:/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-32:/home/cpu2017/je5.0.1-64"
```

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM memory using Redhat Enterprise Linux 7.4

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches
```

runcpu command invoked through numactl i.e.:

```
numactl --interleave=all runcpu <etc>
```

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Supermicro

SuperServer 5019P-MT (X11SPi-TF , Intel Xeon Platinum 8180)

SPECrate2017_fp_base = 109

SPECrate2017_fp_peak = 111

CPU2017 License: 001176

Test Date: Jun-2018

Test Sponsor: Supermicro

Hardware Availability: Jul-2017

Tested by: Supermicro

Software Availability: Feb-2018

General Notes (Continued)

is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Platform Notes

BIOS Settings:

LLC prefetch = Enable

Power Technology = Custom

Power Performance Tuning = BIOS Controls EPB

ENERGY_PERF_BIAS_CFG mode = Maximum Performance

Hardware P-state = Out of Band Mode

SNC = Enable

XPT Prefetch = Enable

Stale AtoS = Enable

LLC dead line alloc = Disable

IMC Interleaving = 1-way Interleave

SDDC Plus One = Disable

ADDDC Sparsing = Disable

Patrol Scrub = Disable

Sysinfo program /home/cpu2017/bin/sysinfo

Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f

running on linux-k7zv Tue Jun 5 06:11:29 2018

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) Platinum 8180 CPU @ 2.50GHz

1 "physical id"s (chips)

56 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 28

siblings : 56

physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
28 29 30

From lscpu:

Architecture: x86_64

CPU op-mode(s): 32-bit, 64-bit

Byte Order: Little Endian

CPU(s): 56

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Supermicro

SuperServer 5019P-MT (X11SPi-TF , Intel Xeon Platinum 8180)

SPECrate2017_fp_base = 109

SPECrate2017_fp_peak = 111

CPU2017 License: 001176

Test Date: Jun-2018

Test Sponsor: Supermicro

Hardware Availability: Jul-2017

Tested by: Supermicro

Software Availability: Feb-2018

Platform Notes (Continued)

On-line CPU(s) list: 0-55
Thread(s) per core: 2
Core(s) per socket: 28
Socket(s): 1
NUMA node(s): 2
Vendor ID: GenuineIntel
CPU family: 6
Model: 85
Model name: Intel(R) Xeon(R) Platinum 8180 CPU @ 2.50GHz
Stepping: 4
CPU MHz: 2499.999
BogoMIPS: 4999.99
Virtualization: VT-x
L1d cache: 32K
L1i cache: 32K
L2 cache: 1024K
L3 cache: 39424K
NUMA node0 CPU(s): 0-3,7-9,14-17,21-23,28-31,35-37,42-45,49-51
NUMA node1 CPU(s): 4-6,10-13,18-20,24-27,32-34,38-41,46-48,52-55
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc aperfmpfperf eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm 3dnowprefetch ida arat epb invpcid_single pln pts dtherm hwp_epp intel_pt rsb_ctxsw spec_ctrl retpoline kaiser tpr_shadow vnmi flexpriority ept vpid fsgsbbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm mpn avx512f avx512dq rdseed adx smap clflushopt clwb avx512cd avx512bw avx512vl xsaveopt xsavec xgetbv1 cqm_llc cqm_occup_llc pkru ospke

/proc/cpuinfo cache data
cache size : 39424 KB

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

available: 2 nodes (0-1)
node 0 cpus: 0 1 2 3 7 8 9 14 15 16 17 21 22 23 28 29 30 31 35 36 37 42 43 44 45 49 50 51
node 0 size: 95326 MB
node 0 free: 79447 MB
node 1 cpus: 4 5 6 10 11 12 13 18 19 20 24 25 26 27 32 33 34 38 39 40 41 46 47 48 52 53 54 55
node 1 size: 96747 MB
node 1 free: 84312 MB
node distances:
node 0 1
0: 10 11

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Supermicro

SuperServer 5019P-MT (X11SPi-TF , Intel Xeon Platinum 8180)

SPECrate2017_fp_base = 109

SPECrate2017_fp_peak = 111

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

Test Date: Jun-2018

Hardware Availability: Jul-2017

Software Availability: Feb-2018

Platform Notes (Continued)

1: 11 10

From /proc/meminfo

```
MemTotal:      196683876 kB
HugePages_Total:       0
Hugepagesize:     2048 kB
```

From /etc/*release* /etc/*version*

```
SuSE-release:
  SUSE Linux Enterprise Server 12 (x86_64)
  VERSION = 12
  PATCHLEVEL = 3
  # This file is deprecated and will be removed in a future service pack or release.
  # Please check /etc/os-release for details about this release.
os-release:
  NAME="SLES"
  VERSION="12-SP3"
  VERSION_ID="12.3"
  PRETTY_NAME="SUSE Linux Enterprise Server 12 SP3"
  ID="sles"
  ANSI_COLOR="0;32"
  CPE_NAME="cpe:/o:suse:sles:12:sp3"
```

uname -a:

```
Linux linux-k7zv 4.4.114-94.11-default #1 SMP Thu Feb 1 19:28:26 UTC 2018 (4309ff9)
x86_64 x86_64 x86_64 GNU/Linux
```

run-level 3 Jun 4 19:10

SPEC is set to: /home/cpu2017

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda4	xfs	145G	38G	107G	26%	/home

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS American Megatrends Inc. 2.0b 02/26/2018

Memory:

```
2x NO DIMM NO DIMM
6x Samsung M393A4K40BB2-CTD 32 GB 2 rank 2666
```

(End of data from sysinfo program)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Supermicro

SuperServer 5019P-MT (X11SPi-TF , Intel Xeon Platinum 8180)

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

SPECrate2017_fp_base = 109

SPECrate2017_fp_peak = 111

Test Date: Jun-2018

Hardware Availability: Jul-2017

Software Availability: Feb-2018

Compiler Version Notes

=====

CC 519.lbm_r(base) 538.imagick_r(base, peak) 544.nab_r(base)

=====

icc (ICC) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====

CC 519.lbm_r(peak) 544.nab_r(peak)

=====

icc (ICC) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====

CXXC 508.namd_r(base) 510.parest_r(base)

=====

icpc (ICC) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====

CXXC 508.namd_r(peak) 510.parest_r(peak)

=====

icpc (ICC) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====

CC 511.povray_r(base) 526.blender_r(base)

=====

icpc (ICC) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

icc (ICC) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====

CC 511.povray_r(peak) 526.blender_r(peak)

=====

icpc (ICC) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

icc (ICC) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Supermicro

SuperServer 5019P-MT (X11SPi-TF , Intel Xeon Platinum 8180)

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

SPECrate2017_fp_base = 109

SPECrate2017_fp_peak = 111

Test Date: Jun-2018

Hardware Availability: Jul-2017

Software Availability: Feb-2018

Compiler Version Notes (Continued)

FC 507.cactubSSN_r(base)

```
icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
```

FC 507.cactubSSN_r(peak)

```
icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
```

FC 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak) 554.roms_r(base)

```
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
```

FC 554.roms_r(peak)

```
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
```

CC 521.wrf_r(base) 527.cam4_r(base)

```
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
```

CC 521.wrf_r(peak) 527.cam4_r(peak)

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Supermicro

SuperServer 5019P-MT (X11SPi-TF , Intel Xeon Platinum 8180)

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

SPECrate2017_fp_base = 109

SPECrate2017_fp_peak = 111

Test Date: Jun-2018

Hardware Availability: Jul-2017

Software Availability: Feb-2018

Compiler Version Notes (Continued)

```
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
```

Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

fort

Benchmarks using both Fortran and C:

fort icc

Benchmarks using both C and C++:

icpcicc

Benchmarks using Fortran, C, and C++:

icpciccfort

Base Portability Flags

```
503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64
```



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Supermicro

SuperServer 5019P-MT (X11SPi-TF , Intel Xeon Platinum 8180)

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

SPECrate2017_fp_base = 109

SPECrate2017_fp_peak = 111

Test Date: Jun-2018

Hardware Availability: Jul-2017

Software Availability: Feb-2018

Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3
```

C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3
```

Fortran benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte
```

Benchmarks using both Fortran and C:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte
```

Benchmarks using both C and C++:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3
```

Benchmarks using Fortran, C, and C++:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte
```

Base Other Flags

C benchmarks:

```
-m64 -std=c11
```

C++ benchmarks:

```
-m64
```

Fortran benchmarks:

```
-m64
```

Benchmarks using both Fortran and C:

```
-m64 -std=c11
```

Benchmarks using both C and C++:

```
-m64 -std=c11
```

Benchmarks using Fortran, C, and C++:

```
-m64 -std=c11
```



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Supermicro

SuperServer 5019P-MT (X11SPi-TF , Intel Xeon Platinum 8180)

SPECrate2017_fp_base = 109

SPECrate2017_fp_peak = 111

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

Test Date: Jun-2018

Hardware Availability: Jul-2017

Software Availability: Feb-2018

Peak Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

ifort icc

Benchmarks using both C and C++:

icpcicc

Benchmarks using Fortran, C, and C++:

icpciccifort

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

```
519.lbm_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3  
-no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3
```

```
538.imagick_r: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=3
```

544.nab_r: Same as 519.lbm_r

C++ benchmarks:

```
-prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3  
-no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3
```

Fortran benchmarks:

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Supermicro

SuperServer 5019P-MT (X11SPi-TF , Intel Xeon Platinum 8180)

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

SPECrate2017_fp_base = 109

SPECrate2017_fp_peak = 111

Test Date: Jun-2018

Hardware Availability: Jul-2017

Software Availability: Feb-2018

Peak Optimization Flags (Continued)

503.bwaves_r: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=3
-nostandard-realloc-lhs -align array32byte

549.fotonik3d_r: Same as 503.bwaves_r

554.roms_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs
-align array32byte

Benchmarks using both Fortran and C:

-prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte

Benchmarks using both C and C++:

-prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3

Benchmarks using Fortran, C, and C++:

-prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte

Peak Other Flags

C benchmarks:

-m64 -std=c11

C++ benchmarks:

-m64

Fortran benchmarks:

-m64

Benchmarks using both Fortran and C:

-m64 -std=c11

Benchmarks using both C and C++:

-m64 -std=c11

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Supermicro

SuperServer 5019P-MT (X11SPi-TF , Intel Xeon Platinum 8180)

SPECrate2017_fp_base = 109

SPECrate2017_fp_peak = 111

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

Test Date: Jun-2018

Hardware Availability: Jul-2017

Software Availability: Feb-2018

Peak Other Flags (Continued)

Benchmarks using Fortran, C, and C++:

-m64 -std=c11

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.html>

<http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-SKL-revC.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-SKL-revC.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU2017 v1.0.2 on 2018-06-04 18:11:28-0400.

Report generated on 2018-10-31 17:32:46 by CPU2017 PDF formatter v6067.

Originally published on 2018-06-26.