



SPEC® CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017_fp_base = 179

SPECrate2017_fp_peak = Not Run

CPU2017 License: 55


Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Aug-2018

Hardware Availability: Feb-2018

Software Availability: Apr-2018

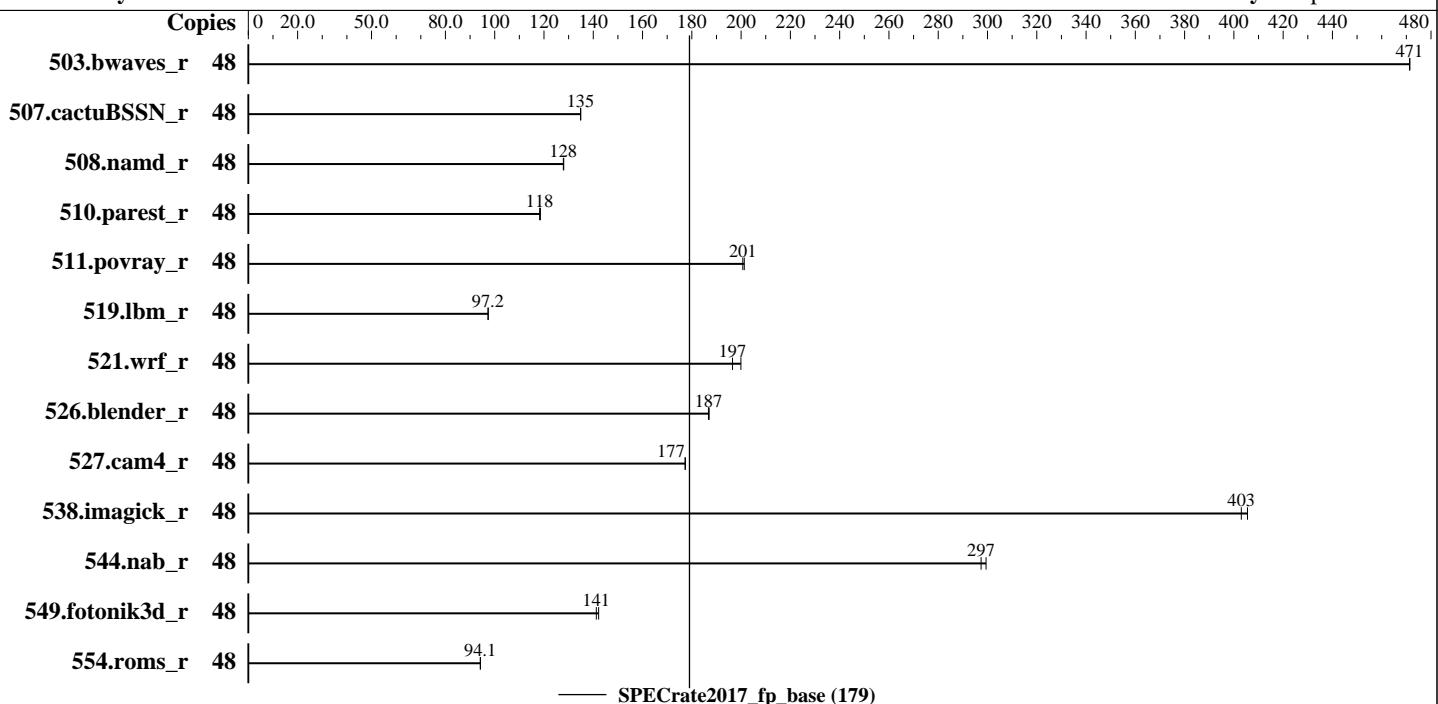

Hardware

CPU Name: Intel Xeon Gold 6146
 Max MHz.: 4200
 Nominal: 3200
 Enabled: 24 cores, 2 chips, 2 threads/core
 Orderable: 1,2 chips
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 24.75 MB I+D on chip per chip
 Other: None
 Memory: 384 GB (24 x 16 GB 2Rx8 PC4-2666V-R)
 Storage: 1 x 960 GB SATA SSD
 Other: None

Software

OS: SUSE Linux Enterprise Server 12 SP3
 kernel 4.4.126-94.22-default
 Compiler: C/C++: Version 18.0.2.20180210 of Intel C/C++
 Compiler for Linux;
 Fortran: Version 18.0.2.20180210 of Intel Fortran
 Compiler for Linux
 Parallel: No
 Firmware: Version 1.3.7 released Feb-2018
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: Not Applicable
 Other: None



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017_fp_base = 179

SPECrate2017_fp_peak = Not Run

CPU2017 License: 55
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Aug-2018
Hardware Availability: Feb-2018
Software Availability: Apr-2018

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	48	1021	471	1021	471									
507.cactubSSN_r	48	450	135	451	135									
508.namd_r	48	357	128	356	128									
510.parest_r	48	1059	119	1062	118									
511.povray_r	48	558	201	557	201									
519.lbm_r	48	520	97.2	519	97.4									
521.wrf_r	48	538	200	547	197									
526.blender_r	48	391	187	391	187									
527.cam4_r	48	473	177	474	177									
538.imagick_r	48	294	406	296	403									
544.nab_r	48	272	297	270	299									
549.fotonik3d_r	48	1324	141	1316	142									
554.roms_r	48	810	94.2	810	94.1									

SPECrate2017_fp_base = 179

SPECrate2017_fp_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

General Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH = "/home/cpu2017/lib/ia32:/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-32:/home/cpu2017/je5.0.1-64"
```

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM memory using Redhat Enterprise Linux 7.4

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Transparent Huge Pages enabled by default

Prior to runcpu invocation

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017_fp_base = 179

PowerEdge R740xd (Intel Xeon Gold 6146, 3.20GHz)

SPECrate2017_fp_peak = Not Run

CPU2017 License: 55

Test Date: Aug-2018

Test Sponsor: Dell Inc.

Hardware Availability: Feb-2018

Tested by: Dell Inc.

Software Availability: Apr-2018

General Notes (Continued)

Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

Platform Notes

BIOS settings:

Sub NUMA Cluster Enabled

Virtualization Technology Disabled

System Profile set to Custom

CPU Performance set to Maximum Performance

C States set to Autonomous

C1E Disabled

Uncore Frequency set to Dynamic

Energy Efficiency Policy set to Performance

Memory Patrol Scrub Disabled

Logical Processor Enabled

CPU Interconnect Bus Link Power Management Disabled

PCI ASPM L1 Link Power Management Disabled

Sysinfo program /home/cpu2017/bin/sysinfo

Rev: r5974 of 2018-05-19 9bcde8f2999c33d61f64985e45859ea9
running on linux-akdf Sat Aug 18 19:56:23 2018

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : Intel(R) Xeon(R) Gold 6146 CPU @ 3.20GHz
  2 "physical id"s (chips)
  48 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
  cpu cores : 12
  siblings : 24
  physical 0: cores 0 3 4 5 6 7 16 18 19 20 21 22
  physical 1: cores 0 1 2 3 9 10 16 18 19 24 26 27
```

From lscpu:

```
Architecture:          x86_64
CPU op-mode(s):       32-bit, 64-bit
Byte Order:           Little Endian
CPU(s):              48
On-line CPU(s) list: 0-47
Thread(s) per core:  2
```

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017_fp_base = 179

SPECrate2017_fp_peak = Not Run

CPU2017 License: 55
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Aug-2018
Hardware Availability: Feb-2018
Software Availability: Apr-2018

Platform Notes (Continued)

Core(s) per socket: 12
Socket(s): 2
NUMA node(s): 4
Vendor ID: GenuineIntel
CPU family: 6
Model: 85
Model name: Intel(R) Xeon(R) Gold 6146 CPU @ 3.20GHz
Stepping: 4
CPU MHz: 3192.482
BogoMIPS: 6384.96
Virtualization: VT-x
L1d cache: 32K
L1i cache: 32K
L2 cache: 1024K
L3 cache: 25344K
NUMA node0 CPU(s): 0,4,8,12,16,20,24,28,32,36,40,44
NUMA node1 CPU(s): 1,5,9,13,17,21,25,29,33,37,41,45
NUMA node2 CPU(s): 2,6,10,14,18,22,26,30,34,38,42,46
NUMA node3 CPU(s): 3,7,11,15,19,23,27,31,35,39,43,47
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc aperfmpfperf eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm 3dnowprefetch ida arat epb invpcid_single pln pts dtherm intel_pt rsb_ctxtsw spec_ctrl stibp retpoline kaiser tpr_shadow vnmi flexpriority ept vpid fsgsbbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm mpn avx512f avx512dq rdseed adx smap clflushopt clwb avx512cd avx512bw avx512vl xsaveopt xsavec xgetbv1 cqm_llc cqm_occup_llc pkru ospke

/proc/cpuinfo cache data
cache size : 25344 KB

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

available: 4 nodes (0-3)
node 0 cpus: 0 4 8 12 16 20 24 28 32 36 40 44
node 0 size: 95355 MB
node 0 free: 95161 MB
node 1 cpus: 1 5 9 13 17 21 25 29 33 37 41 45
node 1 size: 96757 MB
node 1 free: 96566 MB
node 2 cpus: 2 6 10 14 18 22 26 30 34 38 42 46
node 2 size: 96757 MB
node 2 free: 96574 MB
node 3 cpus: 3 7 11 15 19 23 27 31 35 39 43 47
node 3 size: 96755 MB

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017_fp_base = 179

PowerEdge R740xd (Intel Xeon Gold 6146, 3.20GHz)

SPECrate2017_fp_peak = Not Run

CPU2017 License: 55

Test Date: Aug-2018

Test Sponsor: Dell Inc.

Hardware Availability: Feb-2018

Tested by: Dell Inc.

Software Availability: Apr-2018

Platform Notes (Continued)

```
node 3 free: 96582 MB
node distances:
node  0   1   2   3
 0: 10  21  11  21
 1: 21  10  21  11
 2: 11  21  10  21
 3: 21  11  21  10

From /proc/meminfo
  MemTotal:      394882272 kB
  HugePages_Total:       0
  Hugepagesize:     2048 kB

/usr/bin/lsb_release -d
  SUSE Linux Enterprise Server 12 SP3

From /etc/*release* /etc/*version*
SuSE-release:
  SUSE Linux Enterprise Server 12 (x86_64)
  VERSION = 12
  PATCHLEVEL = 3
  # This file is deprecated and will be removed in a future service pack or release.
  # Please check /etc/os-release for details about this release.
os-release:
  NAME="SLES"
  VERSION="12-SP3"
  VERSION_ID="12.3"
  PRETTY_NAME="SUSE Linux Enterprise Server 12 SP3"
  ID="sles"
  ANSI_COLOR="0;32"
  CPE_NAME="cpe:/o:suse:sles:12:sp3"

uname -a:
  Linux linux-akdf 4.4.126-94.22-default #1 SMP Wed Apr 11 07:45:03 UTC 2018 (9649989)
  x86_64 x86_64 x86_64 GNU/Linux

Kernel self-reported vulnerability status:

CVE-2017-5754 (Meltdown):           Mitigation: PTI
CVE-2017-5753 (Spectre variant 1):  Mitigation: __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):  Mitigation: IBRS+IBPB

run-level 3 Aug 18 17:14

SPEC is set to: /home/cpu2017
  Filesystem  Type  Size  Used Avail Use% Mounted on
  /dev/sda4    xfs   852G   32G  820G   4%  /home
```

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017_fp_base = 179

PowerEdge R740xd (Intel Xeon Gold 6146, 3.20GHz)

SPECrate2017_fp_peak = Not Run

CPU2017 License: 55

Test Date: Aug-2018

Test Sponsor: Dell Inc.

Hardware Availability: Feb-2018

Tested by: Dell Inc.

Software Availability: Apr-2018

Platform Notes (Continued)

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS Dell Inc. 1.3.7 02/08/2018

Memory:

24x 00AD00B300AD HMA82GR7AFR8N-VK 16 GB 2 rank 2666

(End of data from sysinfo program)

Compiler Version Notes

=====

CC 519.lbm_r(base) 538.imagick_r(base) 544.nab_r(base)

=====

icc (ICC) 18.0.2 20180210

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====

CXXC 508.namd_r(base) 510.parest_r(base)

=====

icpc (ICC) 18.0.2 20180210

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====

CC 511.povray_r(base) 526.blender_r(base)

=====

icpc (ICC) 18.0.2 20180210

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

icc (ICC) 18.0.2 20180210

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====

FC 507.cactubSSN_r(base)

=====

icpc (ICC) 18.0.2 20180210

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

icc (ICC) 18.0.2 20180210

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

ifort (IFORT) 18.0.2 20180210

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017_fp_base = 179

PowerEdge R740xd (Intel Xeon Gold 6146, 3.20GHz)

SPECrate2017_fp_peak = Not Run

CPU2017 License: 55

Test Date: Aug-2018

Test Sponsor: Dell Inc.

Hardware Availability: Feb-2018

Tested by: Dell Inc.

Software Availability: Apr-2018

Compiler Version Notes (Continued)

```
=====
```

```
FC 503.bwaves_r(base) 549.fotonik3d_r(base) 554.roms_r(base)
```

```
=====
```

```
ifort (IFORT) 18.0.2 20180210
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
```

```
=====
```

```
CC 521.wrf_r(base) 527.cam4_r(base)
```

```
=====
```

```
ifort (IFORT) 18.0.2 20180210
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
icc (ICC) 18.0.2 20180210
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
```

```
=====
```

Base Compiler Invocation

C benchmarks:

```
icc -m64 -std=c11
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
ifort -m64 icc -m64 -std=c11
```

Benchmarks using both C and C++:

```
icpc -m64 icc -m64 -std=c11
```

Benchmarks using Fortran, C, and C++:

```
icpc -m64 icc -m64 -std=c11 ifort -m64
```

Base Portability Flags

503.bwaves_r: -DSPEC_LP64

507.cactusBSSN_r: -DSPEC_LP64

508.namd_r: -DSPEC_LP64

510.parest_r: -DSPEC_LP64

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

SPECCrate2017_fp_base = 179

PowerEdge R740xd (Intel Xeon Gold 6146, 3.20GHz)

SPECCrate2017_fp_peak = Not Run

CPU2017 License: 55

Test Date: Aug-2018

Test Sponsor: Dell Inc.

Hardware Availability: Feb-2018

Tested by: Dell Inc.

Software Availability: Apr-2018

Base Portability Flags (Continued)

```
511.povray_r: -DSPEC_LP64  
519.lbm_r: -DSPEC_LP64  
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian  
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char  
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG  
538.imagick_r: -DSPEC_LP64  
544.nab_r: -DSPEC_LP64  
549.fotonik3d_r: -DSPEC_LP64  
554.roms_r: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3
```

C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3
```

Fortran benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3 -auto -nostandard-realloc-lhs
```

Benchmarks using both Fortran and C:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3 -auto -nostandard-realloc-lhs
```

Benchmarks using both C and C++:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3
```

Benchmarks using Fortran, C, and C++:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3 -auto -nostandard-realloc-lhs
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-12-21.html>
<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge14G-revC.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-12-21.xml>
<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge14G-revC.xml>



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017_fp_base = 179

SPECrate2017_fp_peak = Not Run

CPU2017 License: 55

Test Date: Aug-2018

Test Sponsor: Dell Inc.

Hardware Availability: Feb-2018

Tested by: Dell Inc.

Software Availability: Apr-2018

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU2017 v1.0.5 on 2018-08-18 20:56:22-0400.

Report generated on 2018-10-31 18:14:21 by CPU2017 PDF formatter v6067.

Originally published on 2018-09-04.