



# SPEC® CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL580 Gen10

(3.00 GHz, Intel Xeon Gold 6154)

SPECrate2017\_fp\_base = 418

SPECrate2017\_fp\_peak = Not Run

CPU2017 License: 3


Test Sponsor: HPE

Tested by: HPE

Test Date: Aug-2018

Hardware Availability: Jun-2018

Software Availability: May-2018

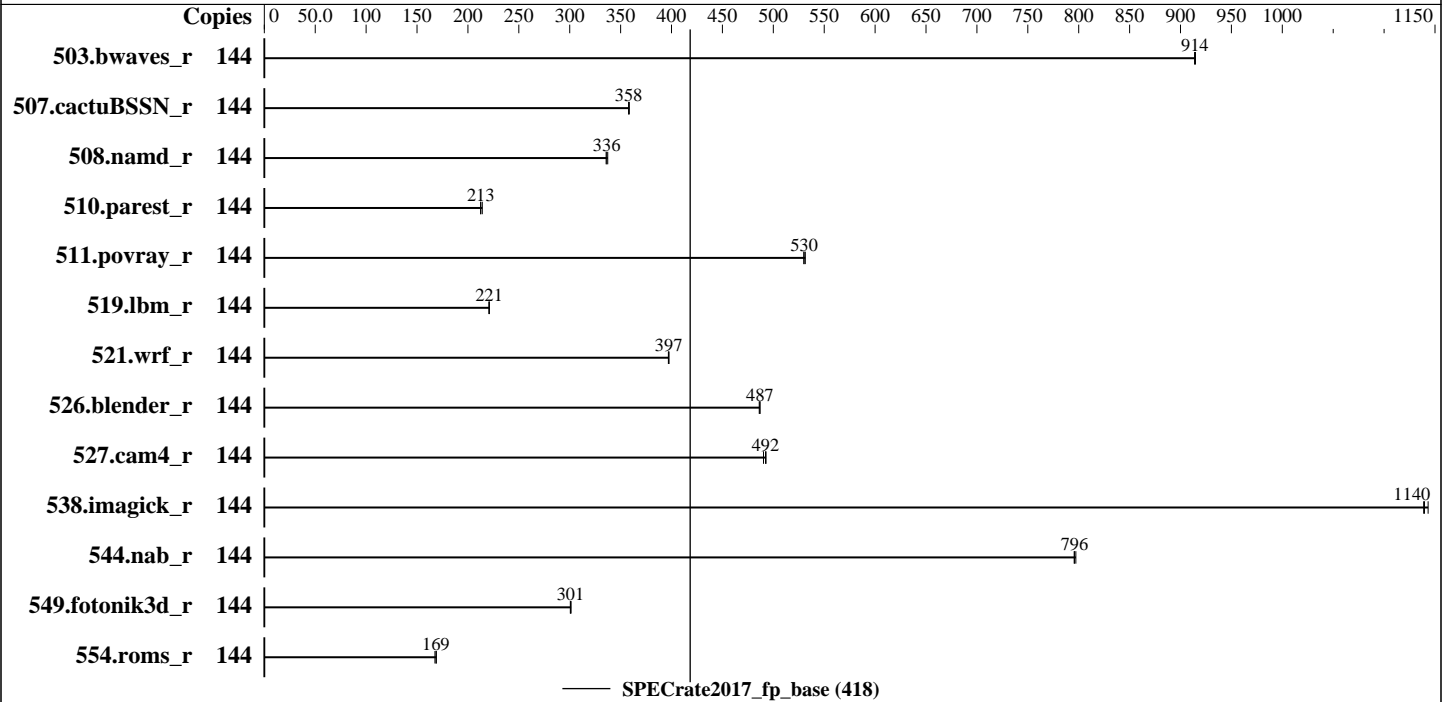

## Hardware

CPU Name: Intel Xeon Gold 6154  
 Max MHz.: 3700  
 Nominal: 3000  
 Enabled: 72 cores, 4 chips, 2 threads/core  
 Orderable: 1, 2, 4 chip(s)  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 24.75 MB I+D on chip per chip  
 Other: None  
 Memory: 1536 GB (48 x 32 GB 2Rx4 PC4-2666V-R)  
 Storage: 1 x 900 GB SATA SSD, RAID 0  
 Other: None

## Software

OS: SUSE Linux Enterprise Server 12 (x86\_64) SP3  
 Kernel 4.4.132-94.33-default  
 Compiler: C/C++: Version 18.0.2.199 of Intel C/C++  
 Compiler for Linux;  
 Fortran: Version 18.0.2.199 of Intel Fortran  
 Compiler for Linux  
 Parallel: No  
 Firmware: HPE BIOS Version U34 06/15/2018 released Jun-2018  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: Not Applicable  
 Other: None



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL580 Gen10

(3.00 GHz, Intel Xeon Gold 6154)

SPECrate2017\_fp\_base = 418

SPECrate2017\_fp\_peak = Not Run

CPU2017 License: 3  
Test Sponsor: HPE  
Tested by: HPE

Test Date: Aug-2018  
Hardware Availability: Jun-2018  
Software Availability: May-2018

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	144	1580	914	1579	915	<b>1580</b>	<b>914</b>							
507.cactuBSSN_r	144	509	358	509	359	<b>509</b>	<b>358</b>							
508.namd_r	144	406	337	407	336	<b>407</b>	<b>336</b>							
510.parest_r	144	1759	214	1773	212	<b>1771</b>	<b>213</b>							
511.povray_r	144	<b>634</b>	<b>530</b>	633	531	635	530							
519.lbm_r	144	687	221	<b>687</b>	<b>221</b>	687	221							
521.wrf_r	144	813	397	812	397	<b>812</b>	<b>397</b>							
526.blender_r	144	450	487	451	486	<b>450</b>	<b>487</b>							
527.cam4_r	144	<b>512</b>	<b>492</b>	514	490	511	493							
538.imagick_r	144	314	1140	<b>314</b>	<b>1140</b>	313	1140							
544.nab_r	144	<b>304</b>	<b>796</b>	304	797	305	796							
549.fotonik3d_r	144	1867	301	<b>1865</b>	<b>301</b>	1862	301							
554.roms_r	144	1354	169	<b>1357</b>	<b>169</b>	1365	168							

SPECrate2017\_fp\_base = 418

SPECrate2017\_fp\_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"  
IRQ balance service was stopped using "service irqbalance stop"  
Tuned-adm profile was set to Throughput-Performance using "tuned-adm profile throughput-performance"  
VM Dirty ratio was set to 40 using "echo 40 > /proc/sys/vm/dirty\_ratio"  
Numa balancing was disabled using "echo 0 > /proc/sys/kernel/numa\_balancing"  
Transparent Huge Pages enabled by default  
Prior to runcpu invocation  
Filesystem page cache synced and cleared with:  
sync; echo 3> /proc/sys/vm/drop\_caches  
runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>"

## General Notes

Environment variables set by runcpu before the start of the run:  
LD\_LIBRARY\_PATH = "/home/cpu2017/lib/ia32:/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-32:/home/cpu2017/je5.0.1-64"

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL580 Gen10

(3.00 GHz, Intel Xeon Gold 6154)

SPECrate2017\_fp\_base = 418

SPECrate2017\_fp\_peak = Not Run

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Aug-2018

**Hardware Availability:** Jun-2018

**Software Availability:** May-2018

## General Notes (Continued)

Binaries compiled on a system with 1x Intel Core i7-6700K CPU + 32GB RAM memory using Redhat Enterprise Linux 7.5

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

## Platform Notes

BIOS Configuration:

Workload Profile set to General Throughput Compute

Memory Patrol Scrubbing set to Disabled

LLC Prefetch set to Enabled

LLC Dead Line Allocation set to Disabled

Stale A to S set to Enabled

Minimum Processor Idle Power Core C-State set to C1E State

Thermal Configuration set to Maximum Cooling

Sysinfo program /home/cpu2017/bin/sysinfo

Rev: r5974 of 2018-05-19 9bcde8f2999c33d61f64985e45859ea9

running on linux-5mn8 Mon Aug 6 06:47:41 2018

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) Gold 6154 CPU @ 3.00GHz

4 "physical id"s (chips)

144 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 18

siblings : 36

physical 0: cores 0 1 2 3 8 9 10 11 16 17 18 19 20 24 25 26 27

physical 1: cores 0 1 2 3 8 9 10 11 16 17 18 19 20 24 25 26 27

physical 2: cores 0 1 2 3 8 9 10 11 16 17 18 19 20 24 25 26 27

physical 3: cores 0 1 2 3 8 9 10 11 16 17 18 19 20 24 25 26 27

From lscpu:

Architecture: x86\_64

CPU op-mode(s): 32-bit, 64-bit

Byte Order: Little Endian

CPU(s): 144

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant DL580 Gen10**

(3.00 GHz, Intel Xeon Gold 6154)

SPECrate2017\_fp\_base = 418

SPECrate2017\_fp\_peak = Not Run

**CPU2017 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Aug-2018  
**Hardware Availability:** Jun-2018  
**Software Availability:** May-2018

## Platform Notes (Continued)

```

On-line CPU(s) list:    0-143
Thread(s) per core:    2
Core(s) per socket:    18
Socket(s):              4
NUMA node(s):          8
Vendor ID:              GenuineIntel
CPU family:             6
Model:                  85
Model name:             Intel(R) Xeon(R) Gold 6154 CPU @ 3.00GHz
Stepping:               4
CPU MHz:                2992.982
BogoMIPS:               5985.96
Virtualization:        VT-x
L1d cache:              32K
L1i cache:              32K
L2 cache:               1024K
L3 cache:               25344K
NUMA node0 CPU(s):     0-8,72-80
NUMA node1 CPU(s):     9-17,81-89
NUMA node2 CPU(s):     18-26,90-98
NUMA node3 CPU(s):     27-35,99-107
NUMA node4 CPU(s):     36-44,108-116
NUMA node5 CPU(s):     45-53,117-125
NUMA node6 CPU(s):     54-62,126-134
NUMA node7 CPU(s):     63-71,135-143
Flags:                  fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc
aperfmpperf eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg
fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes
xsave avx f16c rdrand lahf_lm abm 3dnowprefetch ida arat epb invpcid_single pln pts
dtherm intel_pt rsb_ctxsw spec_ctrl stibp retpoline kaiser tpr_shadow vnmi
flexpriority ept vpid fsgsbase tsc_adjust bml hle avx2 smep bmi2 erms invpcid rtm
cqm mpx avx512f avx512dq rdseed adx smap clflushopt clwb avx512cd avx512bw avx512vl
xsaveopt xsavec xgetbv1 cqm_llc cqm_occup_llc pku ospke

```

```

/proc/cpuinfo cache data
cache size : 25344 KB

```

```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a
physical chip.
available: 8 nodes (0-7)
node 0 cpus: 0 1 2 3 4 5 6 7 8 72 73 74 75 76 77 78 79 80
node 0 size: 193103 MB
node 0 free: 192821 MB
node 1 cpus: 9 10 11 12 13 14 15 16 17 81 82 83 84 85 86 87 88 89
node 1 size: 193533 MB

```

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL580 Gen10

(3.00 GHz, Intel Xeon Gold 6154)

SPECrate2017\_fp\_base = 418

SPECrate2017\_fp\_peak = Not Run

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Aug-2018

Hardware Availability: Jun-2018

Software Availability: May-2018

## Platform Notes (Continued)

```

node 1 free: 193267 MB
node 2 cpus: 18 19 20 21 22 23 24 25 26 90 91 92 93 94 95 96 97 98
node 2 size: 193533 MB
node 2 free: 193404 MB
node 3 cpus: 27 28 29 30 31 32 33 34 35 99 100 101 102 103 104 105 106 107
node 3 size: 193533 MB
node 3 free: 193409 MB
node 4 cpus: 36 37 38 39 40 41 42 43 44 108 109 110 111 112 113 114 115 116
node 4 size: 193533 MB
node 4 free: 193420 MB
node 5 cpus: 45 46 47 48 49 50 51 52 53 117 118 119 120 121 122 123 124 125
node 5 size: 193533 MB
node 5 free: 193428 MB
node 6 cpus: 54 55 56 57 58 59 60 61 62 126 127 128 129 130 131 132 133 134
node 6 size: 193533 MB
node 6 free: 193421 MB
node 7 cpus: 63 64 65 66 67 68 69 70 71 135 136 137 138 139 140 141 142 143
node 7 size: 193531 MB
node 7 free: 193418 MB
node distances:
node  0  1  2  3  4  5  6  7
  0:  10  21  31  31  31  31  31  31
  1:  21  10  31  31  31  31  31  31
  2:  31  31  10  21  31  31  31  31
  3:  31  31  21  10  31  31  31  31
  4:  31  31  31  31  10  21  31  31
  5:  31  31  31  31  21  10  31  31
  6:  31  31  31  31  31  31  10  21
  7:  31  31  31  31  31  31  21  10

```

From /proc/meminfo

MemTotal: 1584981728 kB

HugePages\_Total: 0

Hugepagesize: 2048 kB

From /etc/\*release\* /etc/\*version\*

SuSE-release:

SUSE Linux Enterprise Server 12 (x86\_64)

VERSION = 12

PATCHLEVEL = 3

# This file is deprecated and will be removed in a future service pack or release.

# Please check /etc/os-release for details about this release.

os-release:

NAME="SLES"

VERSION="12-SP3"

VERSION\_ID="12.3"

PRETTY\_NAME="SUSE Linux Enterprise Server 12 SP3"

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant DL580 Gen10**

(3.00 GHz, Intel Xeon Gold 6154)

SPECrate2017\_fp\_base = 418

SPECrate2017\_fp\_peak = Not Run

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Aug-2018

**Hardware Availability:** Jun-2018

**Software Availability:** May-2018

## Platform Notes (Continued)

```
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12:sp3"
```

uname -a:

```
Linux linux-5mn8 4.4.132-94.33-default #1 SMP Tue May 29 20:09:56 UTC 2018 (76aae3b)
x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

```
CVE-2017-5754 (Meltdown): Mitigation: PTI
CVE-2017-5753 (Spectre variant 1): Mitigation: __user pointer sanitization
CVE-2017-5715 (Spectre variant 2): Mitigation: IBRS+IBPB
```

run-level 3 Aug 6 06:44

SPEC is set to: /home/cpu2017

```
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda4        xfs   852G  101G  752G  12% /home
```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS HPE U34 06/15/2018

Memory:

48x UNKNOWN NOT AVAILABLE 32 GB 2 rank 2666

(End of data from sysinfo program)

## Compiler Version Notes

```
=====  
CC 519.lbm_r(base) 538.imagick_r(base) 544.nab_r(base)  
-----
```

icc (ICC) 18.0.2 20180210

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

```
=====  
CXXC 508.namd_r(base) 510.parest_r(base)  
-----
```

icpc (ICC) 18.0.2 20180210

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant DL580 Gen10**

(3.00 GHz, Intel Xeon Gold 6154)

SPECrate2017\_fp\_base = 418

SPECrate2017\_fp\_peak = Not Run

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Aug-2018

**Hardware Availability:** Jun-2018

**Software Availability:** May-2018

## Compiler Version Notes (Continued)

=====  
CC 511.povray\_r(base) 526.blender\_r(base)  
-----

icpc (ICC) 18.0.2 20180210  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.  
icc (ICC) 18.0.2 20180210  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.  
-----

=====  
FC 507.cactuBSSN\_r(base)  
-----

icpc (ICC) 18.0.2 20180210  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.  
icc (ICC) 18.0.2 20180210  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.  
ifort (IFORT) 18.0.2 20180210  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.  
-----

=====  
FC 503.bwaves\_r(base) 549.fotonik3d\_r(base) 554.roms\_r(base)  
-----

ifort (IFORT) 18.0.2 20180210  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.  
-----

=====  
CC 521.wrf\_r(base) 527.cam4\_r(base)  
-----

ifort (IFORT) 18.0.2 20180210  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.  
icc (ICC) 18.0.2 20180210  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.  
-----

## Base Compiler Invocation

C benchmarks:

icc -m64 -std=c11

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL580 Gen10

(3.00 GHz, Intel Xeon Gold 6154)

SPECrate2017\_fp\_base = 418

SPECrate2017\_fp\_peak = Not Run

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Aug-2018

**Hardware Availability:** Jun-2018

**Software Availability:** May-2018

## Base Compiler Invocation (Continued)

Benchmarks using both Fortran and C:

```
ifort -m64 icc -m64 -std=c11
```

Benchmarks using both C and C++:

```
icpc -m64 icc -m64 -std=c11
```

Benchmarks using Fortran, C, and C++:

```
icpc -m64 icc -m64 -std=c11 ifort -m64
```

## Base Portability Flags

```
503.bwaves_r: -DSPEC_LP64
```

```
507.cactuBSSN_r: -DSPEC_LP64
```

```
508.namd_r: -DSPEC_LP64
```

```
510.parest_r: -DSPEC_LP64
```

```
511.povray_r: -DSPEC_LP64
```

```
519.lbm_r: -DSPEC_LP64
```

```
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
```

```
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
```

```
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
```

```
538.imagick_r: -DSPEC_LP64
```

```
544.nab_r: -DSPEC_LP64
```

```
549.fotonik3d_r: -DSPEC_LP64
```

```
554.roms_r: -DSPEC_LP64
```

## Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
```

```
-qopt-mem-layout-trans=3
```

C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
```

```
-qopt-mem-layout-trans=3
```

Fortran benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
```

```
-qopt-mem-layout-trans=3 -auto -nostandard-realloc-lhs
```

(Continued on next page)





# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL580 Gen10

(3.00 GHz, Intel Xeon Gold 6154)

SPECrate2017\_fp\_base = 418

SPECrate2017\_fp\_peak = Not Run

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Aug-2018

**Hardware Availability:** Jun-2018

**Software Availability:** May-2018

## Base Optimization Flags (Continued)

Benchmarks using both Fortran and C:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3 -auto -nostandard-realloc-lhs
```

Benchmarks using both C and C++:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3
```

Benchmarks using Fortran, C, and C++:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3 -auto -nostandard-realloc-lhs
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-V1.2-SKX-revH.html>

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-12-21.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-V1.2-SKX-revH.xml>

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-12-21.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU2017 v1.0.5 on 2018-08-06 06:47:40-0400.

Report generated on 2018-10-31 18:36:34 by CPU2017 PDF formatter v6067.

Originally published on 2018-09-18.