



SPEC® CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Supermicro


SuperServer 5019P-MT (X11SPi-TF , Intel Xeon Silver 4114T)

SPECrate2017_int_base = 46.7

SPECrate2017_int_peak = 49.7

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Oct-2018
Hardware Availability: Jul-2017
Software Availability: Mar-2018

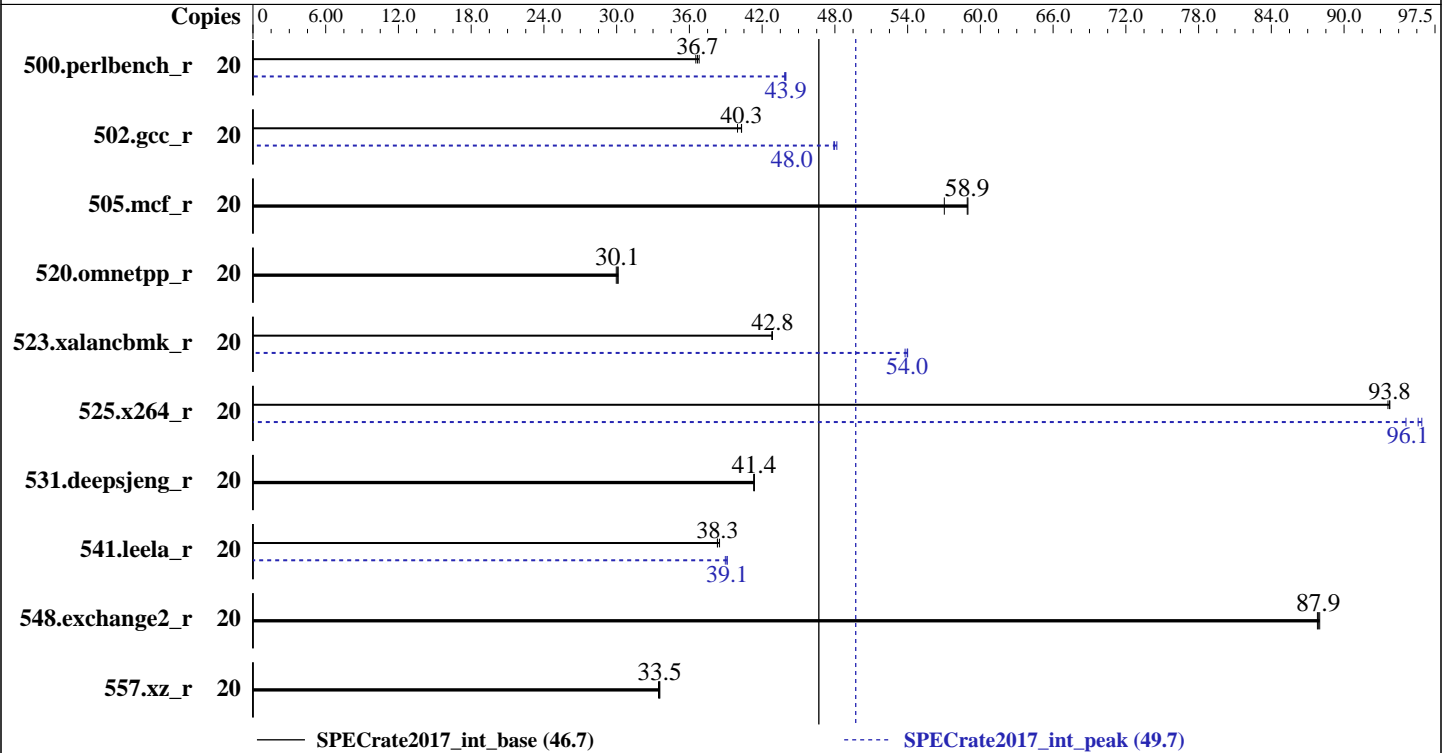

Hardware

CPU Name: Intel Xeon Silver 4114T
Max MHz.: 3000
Nominal: 2200
Enabled: 10 cores, 1 chip, 2 threads/core
Orderable: 1 chip
Cache L1: 32 KB I + 32 KB D on chip per core
L2: 1 MB I+D on chip per core
L3: 13.75 MB I+D on chip per chip
Other: None
Memory: 192 GB (6 x 32 GB 2Rx4 PC4-2666V-R, running at 2400)
Storage: 1 x 200 GB SATA III SSD
Other: None

Software

OS: SUSE Linux Enterprise Server 12 SP3 (x86_64)
Kernel 4.4.114-94.11-default
Compiler: C/C++: Version 18.0.2.199 of Intel C/C++ Compiler for Linux;
Fortran: Version 18.0.2.199 of Intel Fortran Compiler for Linux
Parallel: No
Firmware: Supermicro BIOS version 2.1 released Jun-2018
File System: xfs
System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: 32/64-bit
Other: jemalloc memory allocator library V5.0.1



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Supermicro

SuperServer 5019P-MT (X11SPi-TF , Intel Xeon Silver 4114T)

SPECrate2017_int_base = 46.7

SPECrate2017_int_peak = 49.7

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Oct-2018
Hardware Availability: Jul-2017
Software Availability: Mar-2018

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	20	865	36.8	872	36.5	868	36.7	20	726	43.9	725	43.9	724	44.0
502.gcc_r	20	703	40.3	703	40.3	709	40.0	20	588	48.2	591	47.9	590	48.0
505.mcf_r	20	548	59.0	549	58.9	567	57.0	20	548	59.0	549	58.9	567	57.0
520.omnetpp_r	20	876	30.0	873	30.1	871	30.1	20	876	30.0	873	30.1	871	30.1
523.xalancbmk_r	20	493	42.8	493	42.8	493	42.8	20	391	54.0	393	53.8	391	54.0
525.x264_r	20	374	93.8	373	93.8	374	93.6	20	368	95.1	364	96.1	363	96.4
531.deepsjeng_r	20	555	41.3	554	41.4	554	41.4	20	555	41.3	554	41.4	554	41.4
541.leela_r	20	861	38.5	865	38.3	864	38.3	20	850	39.0	847	39.1	847	39.1
548.exchange2_r	20	596	87.9	597	87.8	596	88.0	20	596	87.9	597	87.8	596	88.0
557.xz_r	20	644	33.5	644	33.6	646	33.5	20	644	33.5	644	33.6	646	33.5

SPECrate2017_int_base = 46.7

SPECrate2017_int_peak = 49.7

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The taskset mechanism was used to bind copies to processors. The config file option 'submit' was used to generate taskset commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

General Notes

Environment variables set by runcpu before the start of the run:

LD_LIBRARY_PATH = "/home/cpu2017/lib/ia32:/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-32:/home/cpu2017/je5.0.1-64"

Binaries compiled on a system with 1x Intel Core i7-6700K CPU + 32GB RAM
memory using Redhat Enterprise Linux 7.5
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Supermicro

SuperServer 5019P-MT (X11SPi-TF , Intel Xeon Silver 4114T)

SPECrate2017_int_base = 46.7

SPECrate2017_int_peak = 49.7

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Oct-2018
Hardware Availability: Jul-2017
Software Availability: Mar-2018

General Notes (Continued)

jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

BIOS Settings:
LLC prefetch = Enable
Power Technology = Custom
Power Performance Tuning = BIOS Controls EPB
ENERGY_PERF_BIAS_CFG mode = Maximum Performance
Hardware P-state = Out of Band Mode
XPT Prefetch = Enable
Stale AtoS = Enable
LLC dead line alloc = Disable
Patrol Scrub = Disable
Sysinfo program /home/cpu2017/bin/sysinfo
Rev: r5974 of 2018-05-19 9bcde8f2999c33d61f64985e45859ea9
running on linux-cyyj Wed Oct 24 15:28:07 2018

SUT (System Under Test) info as seen by some common utilities.
For more information on this section, see
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo
model name : Intel(R) Xeon(R) Silver 4114T CPU @ 2.20GHz
1 "physical id"s (chips)
20 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 10
siblings : 20
physical 0: cores 0 1 2 3 4 8 9 10 11 12

From lscpu:
Architecture: x86_64
CPU op-mode(s): 32-bit, 64-bit
Byte Order: Little Endian
CPU(s): 20
On-line CPU(s) list: 0-19
Thread(s) per core: 2
Core(s) per socket: 10
Socket(s): 1
NUMA node(s): 1
Vendor ID: GenuineIntel
CPU family: 6

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Supermicro

SuperServer 5019P-MT (X11SPi-TF , Intel Xeon Silver 4114T)

SPECrate2017_int_base = 46.7

SPECrate2017_int_peak = 49.7

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Oct-2018
Hardware Availability: Jul-2017
Software Availability: Mar-2018

Platform Notes (Continued)

```

Model: 85
Model name: Intel(R) Xeon(R) Silver 4114T CPU @ 2.20GHz
Stepping: 4
CPU MHz: 2200.001
BogoMIPS: 4400.00
Virtualization: VT-x
L1d cache: 32K
L1i cache: 32K
L2 cache: 1024K
L3 cache: 14080K
NUMA node0 CPU(s): 0-19
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc
aperfperf eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg
fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes
xsave avx fl16c rdrand lahf_lm abm 3dnowprefetch ida arat epb invpcid_single pln pts
dtherm hwp_epp intel_pt rsb_ctxsw spec_ctrl retpoline kaiser tpr_shadow vnmi
flexpriority ept vpid fsgsbase tsc_adjust bmil hle avx2 smep bmi2 erms invpcid rtm
cqm mpx avx512f avx512dq rdseed adx smap clflushopt clwb avx512cd avx512bw avx512vl
xsaveopt xsavec xgetbv1 cqm_llc cqm_occup_llc pku ospke

```

```

/proc/cpuinfo cache data
cache size : 14080 KB

```

```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a
physical chip.
available: 1 nodes (0)
node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19
node 0 size: 192078 MB
node 0 free: 191338 MB
node distances:
node 0
0: 10

```

```

From /proc/meminfo
MemTotal: 196688068 kB
HugePages_Total: 0
Hugepagesize: 2048 kB

```

```

From /etc/*release* /etc/*version*
SuSE-release:
SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 3
# This file is deprecated and will be removed in a future service pack or release.
# Please check /etc/os-release for details about this release.

```

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Supermicro

SuperServer 5019P-MT (X11SPi-TF , Intel Xeon Silver 4114T)

SPECrate2017_int_base = 46.7

SPECrate2017_int_peak = 49.7

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Oct-2018
Hardware Availability: Jul-2017
Software Availability: Mar-2018

Platform Notes (Continued)

```
os-release:
  NAME="SLES"
  VERSION="12-SP3"
  VERSION_ID="12.3"
  PRETTY_NAME="SUSE Linux Enterprise Server 12 SP3"
  ID="sles"
  ANSI_COLOR="0;32"
  CPE_NAME="cpe:/o:suse:sles:12:sp3"
```

```
uname -a:
Linux linux-cyyj 4.4.114-94.11-default #1 SMP Thu Feb 1 19:28:26 UTC 2018 (4309ff9)
x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

```
CVE-2017-5754 (Meltdown):          Mitigation: PTI
CVE-2017-5753 (Spectre variant 1): Mitigation: Barriers
CVE-2017-5715 (Spectre variant 2): Mitigation: IBRS+IBPB
```

```
run-level 3 Oct 24 15:15
```

```
SPEC is set to: /home/cpu2017
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda3       xfs   145G   64G   81G   45% /home
```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS American Megatrends Inc. 2.1 06/14/2018

Memory:

2x NO DIMM NO DIMM

6x Samsung M393A4K40BB2-CTD 32 GB 2 rank 2666, configured at 2400

(End of data from sysinfo program)

Compiler Version Notes

```
=====  
CC 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base) 525.x264_r(base)  
557.xz_r(base)  
-----
```

```
icc (ICC) 18.0.2 20180210
```

```
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.  
-----
```

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Supermicro

SuperServer 5019P-MT (X11SPi-TF , Intel Xeon Silver 4114T)

SPECrate2017_int_base = 46.7

SPECrate2017_int_peak = 49.7

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Oct-2018
Hardware Availability: Jul-2017
Software Availability: Mar-2018

Compiler Version Notes (Continued)

=====
CC 500.perlbench_r(peak) 502.gcc_r(peak) 505.mcf_r(peak) 525.x264_r(peak)
557.xz_r(peak)

icc (ICC) 18.0.2 20180210
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====
CXXC 520.omnetpp_r(base) 523.xalancbmk_r(base) 531.deepsjeng_r(base)
541.leela_r(base)

icpc (ICC) 18.0.2 20180210
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====
CXXC 520.omnetpp_r(peak) 523.xalancbmk_r(peak) 531.deepsjeng_r(peak)
541.leela_r(peak)

icpc (ICC) 18.0.2 20180210
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====
FC 548.exchange2_r(base)

ifort (IFORT) 18.0.2 20180210
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====
FC 548.exchange2_r(peak)

ifort (IFORT) 18.0.2 20180210
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:
icc -m64 -std=c11

C++ benchmarks:
icpc -m64

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Supermicro

SuperServer 5019P-MT (X11SPi-TF , Intel Xeon Silver 4114T)

SPECrate2017_int_base = 46.7

SPECrate2017_int_peak = 49.7

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Oct-2018
Hardware Availability: Jul-2017
Software Availability: Mar-2018

Base Compiler Invocation (Continued)

Fortran benchmarks:
ifort -m64

Base Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib -ljemalloc

C++ benchmarks:
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib -ljemalloc

Fortran benchmarks:
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs
-L/usr/local/je5.0.1-64/lib -ljemalloc

Peak Compiler Invocation

C benchmarks (except as noted below):
icc -m64 -std=c11

502.gcc_r: icc -m32 -std=c11 -L/home/prasadj/specdev/IC18u2_Internal/lin_18_0_20180210/compiler/lib/ia32_lin

C++ benchmarks (except as noted below):
icpc -m64

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Supermicro

SuperServer 5019P-MT (X11SPi-TF , Intel Xeon Silver 4114T)

SPECrate2017_int_base = 46.7

SPECrate2017_int_peak = 49.7

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Oct-2018
Hardware Availability: Jul-2017
Software Availability: Mar-2018

Peak Compiler Invocation (Continued)

```
523.xalancbmk_r: icpc -m32 -L/home/prasadj/specdev/IC18u2_Internal/lin_18_0_20180210/compiler/lib/ia32_lin
```

Fortran benchmarks:
ifort -m64

Peak Portability Flags

```
500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64  
502.gcc_r: -D_FILE_OFFSET_BITS=64  
505.mcf_r: -DSPEC_LP64  
520.omnetpp_r: -DSPEC_LP64  
523.xalancbmk_r: -D_FILE_OFFSET_BITS=64 -DSPEC_LINUX  
525.x264_r: -DSPEC_LP64  
531.deepsjeng_r: -DSPEC_LP64  
541.leela_r: -DSPEC_LP64  
548.exchange2_r: -DSPEC_LP64  
557.xz_r: -DSPEC_LP64
```

Peak Optimization Flags

C benchmarks:

```
500.perlbench_r: -w1,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo  
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=3  
-fno-strict-overflow -L/usr/local/je5.0.1-64/lib  
-ljemalloc  
  
502.gcc_r: -w1,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo  
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=3  
-L/usr/local/je5.0.1-32/lib -ljemalloc  
  
505.mcf_r: basepeak = yes  
  
525.x264_r: -w1,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo  
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=3  
-fno-alias -L/usr/local/je5.0.1-64/lib -ljemalloc  
  
557.xz_r: basepeak = yes
```

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Supermicro

SuperServer 5019P-MT (X11SPi-TF , Intel Xeon Silver 4114T)

SPECrate2017_int_base = 46.7

SPECrate2017_int_peak = 49.7

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Oct-2018
Hardware Availability: Jul-2017
Software Availability: Mar-2018

Peak Optimization Flags (Continued)

C++ benchmarks:

520.omnetpp_r: basepeak = yes

523.xalancbmk_r: -w1,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=3
-L/usr/local/je5.0.1-32/lib -ljemalloc

531.deepsjeng_r: basepeak = yes

541.leela_r: -w1,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=3
-L/usr/local/je5.0.1-64/lib -ljemalloc

Fortran benchmarks:

548.exchange2_r: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-12-21.html>

<http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-SKL-revD.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-12-21.xml>

<http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-SKL-revD.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU2017 v1.0.5 on 2018-10-24 03:28:06-0400.

Report generated on 2018-11-13 15:14:07 by CPU2017 PDF formatter v6067.

Originally published on 2018-11-13.