



# SPEC® CPU2017 Integer Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECspeed2017\_int\_base = 10.4

Thinksystem SR250  
(3.80 GHz, Intel Xeon E-2186G)

SPECspeed2017\_int\_peak = Not Run

CPU2017 License: 9017


Test Date: Nov-2018

Test Sponsor: Lenovo Global Technology

Hardware Availability: Jan-2019

Tested by: Lenovo Global Technology

Software Availability: May-2018

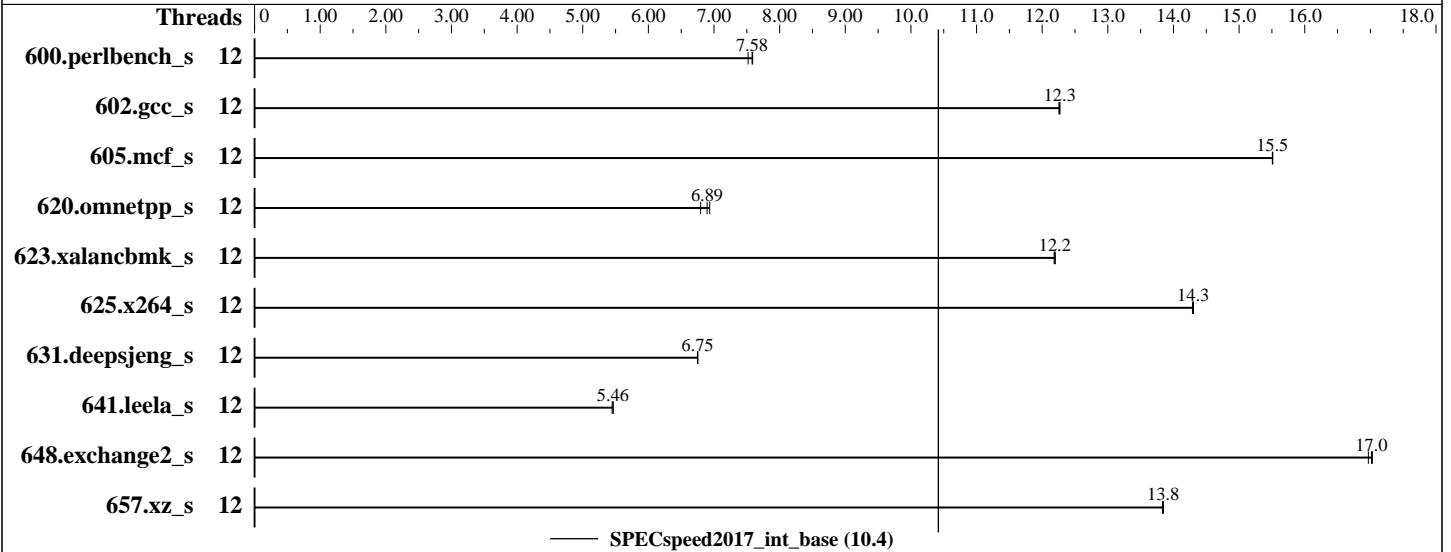

### Hardware

CPU Name: Intel Xeon E-2186G  
 Max MHz.: 4700  
 Nominal: 3800  
 Enabled: 6 cores, 1 chip, 2 threads/core  
 Orderable: 1 chip  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 256 KB I+D on chip per core  
 L3: 12 MB I+D on chip per chip  
 Other: None  
 Memory: 64 GB (4 x 16 GB 2Rx8 PC4-2666V-E)  
 Storage: 1 x 480 GB SATA SSD  
 Other: None

### Software

OS: Red Hat Enterprise Linux Server release 7.5 (Maipo)  
 Kernel 3.10.0-862.3.2.el7.x86\_64  
 Compiler: C/C++: Version 18.0.2.199 of Intel C/C++ Compiler for Linux;  
 Fortran: Version 18.0.2.199 of Intel Fortran Compiler for Linux  
 Parallel: Yes  
 Firmware: Lenovo BIOS Version ISE105G 1.01 released Oct-2018  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: Not Applicable  
 Other: jemalloc memory allocator V5.0.1



# SPEC CPU2017 Integer Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Lenovo Global Technology

Thinksystem SR250  
(3.80 GHz, Intel Xeon E-2186G)

SPECspeed2017\_int\_base = 10.4

SPECspeed2017\_int\_peak = Not Run

CPU2017 License: 9017  
Test Sponsor: Lenovo Global Technology  
Tested by: Lenovo Global Technology

Test Date: Nov-2018  
Hardware Availability: Jan-2019  
Software Availability: May-2018

## Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	12	236	7.52	<b>234</b>	<b>7.58</b>	234	7.59							
602.gcc_s	12	<b>325</b>	<b>12.3</b>	325	12.3	325	12.3							
605.mcf_s	12	304	15.5	<b>304</b>	<b>15.5</b>	304	15.5							
620.omnetpp_s	12	235	6.93	<b>237</b>	<b>6.89</b>	240	6.80							
623.xalancbmk_s	12	<b>116</b>	<b>12.2</b>	116	12.2	116	12.2							
625.x264_s	12	123	14.3	<b>123</b>	<b>14.3</b>	123	14.3							
631.deepsjeng_s	12	212	6.75	212	6.75	<b>212</b>	<b>6.75</b>							
641.leela_s	12	313	5.45	<b>312</b>	<b>5.46</b>	312	5.46							
648.exchange2_s	12	<b>173</b>	<b>17.0</b>	173	17.0	173	17.0							
657.xz_s	12	447	13.8	447	13.8	<b>447</b>	<b>13.8</b>							

SPECspeed2017\_int\_base = 10.4

SPECspeed2017\_int\_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## General Notes

Environment variables set by runcpu before the start of the run:  
KMP\_AFFINITY = "granularity=fine,scatter"  
LD\_LIBRARY\_PATH = "/home/cpu2017-1.0.5-ic18.0u2/lib/ia32:/home/cpu2017-1.0.5-ic18.0u2/lib/intel64"  
LD\_LIBRARY\_PATH = "\$LD\_LIBRARY\_PATH:/home/cpu2017-1.0.5-ic18.0u2/je5.0.1-32:/home/cpu2017-1.0.5-ic18.0u2/je5.0.1-64"  
OMP\_STACKSIZE = "192M"  
Binaries compiled on a system with 1x Intel Core i7-6700K CPU + 32GB RAM  
memory using Redhat Enterprise Linux 7.5  
Transparent Huge Pages enabled by default  
Prior to runcpu invocation  
Filesystem page cache synced and cleared with:  
sync; echo 3> /proc/sys/vm/drop\_caches  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.  
jemalloc, a general purpose malloc implementation  
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5  
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>



# SPEC CPU2017 Integer Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECspeed2017\_int\_base = 10.4

Thinksystem SR250  
(3.80 GHz, Intel Xeon E-2186G)

SPECspeed2017\_int\_peak = Not Run

CPU2017 License: 9017

Test Date: Nov-2018

Test Sponsor: Lenovo Global Technology

Hardware Availability: Jan-2019

Tested by: Lenovo Global Technology

Software Availability: May-2018

## Platform Notes

BIOS configuration:

Choose Operating Mode set to Maximum Performance

Choose Operating Mode set to Custom Mode

CPU P-state Control set to Legacy

Sysinfo program /home/cpu2017-1.0.5-ic18.0u2/bin/sysinfo

Rev: r5974 of 2018-05-19 9bcde8f2999c33d61f64985e45859ea9

running on localhost.localdomain Tue Nov 6 15:37:29 2018

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) E-2186G CPU @ 3.80GHz

1 "physical id"s (chips)

12 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 6

siblings : 12

physical 0: cores 0 1 2 3 4 5

From lscpu:

Architecture: x86\_64

CPU op-mode(s): 32-bit, 64-bit

Byte Order: Little Endian

CPU(s): 12

On-line CPU(s) list: 0-11

Thread(s) per core: 2

Core(s) per socket: 6

Socket(s): 1

NUMA node(s): 1

Vendor ID: GenuineIntel

CPU family: 6

Model: 158

Model name: Intel(R) Xeon(R) E-2186G CPU @ 3.80GHz

Stepping: 10

CPU MHz: 899.902

CPU max MHz: 4700.0000

CPU min MHz: 800.0000

BogoMIPS: 7584.00

Virtualization: VT-x

L1d cache: 32K

L1i cache: 32K

L2 cache: 256K

L3 cache: 12288K

NUMA node0 CPU(s): 0-11

(Continued on next page)



# SPEC CPU2017 Integer Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECspeed2017\_int\_base = 10.4

Thinksystem SR250  
(3.80 GHz, Intel Xeon E-2186G)

SPECspeed2017\_int\_peak = Not Run

CPU2017 License: 9017

Test Date: Nov-2018

Test Sponsor: Lenovo Global Technology

Hardware Availability: Jan-2019

Tested by: Lenovo Global Technology

Software Availability: May-2018

### Platform Notes (Continued)

```

Flags:                fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc
aperfperf eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg
fma cx16 xtpr pdcm pcid sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes
xsave avx f16c rdrand lahf_lm abm 3dnowprefetch epb intel_pt tpr_shadow vnmi
flexpriority ept vpid fsgsbase tsc_adjust bmil hle avx2 smep bmi2 erms invpcid rtm
mpx rdseed adx smap clflushopt xsaveopt xsavec xgetbv1 ibpb ibrs stibp dtherm ida
arat pln pts hwp hwp_notify hwp_act_window hwp_epp spec_ctrl intel_stibp ssbd

```

```

/proc/cpuinfo cache data
cache size : 12288 KB

```

```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a
physical chip.

```

```

available: 1 nodes (0)
node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11
node 0 size: 65485 MB
node 0 free: 63570 MB
node distances:
node 0
0: 10

```

```

From /proc/meminfo
MemTotal:        65924836 kB
HugePages_Total:    0
Hugepagesize:     2048 kB

```

```

From /etc/*release* /etc/*version*
os-release:
NAME="Red Hat Enterprise Linux Server"
VERSION="7.5 (Maipo)"
ID="rhel"
ID_LIKE="fedora"
VARIANT="Server"
VARIANT_ID="server"
VERSION_ID="7.5"
PRETTY_NAME="Red Hat Enterprise Linux Server 7.5 (Maipo)"
redhat-release: Red Hat Enterprise Linux Server release 7.5 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.5 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.5:ga:server

```

```

uname -a:
Linux localhost.localdomain 3.10.0-862.3.2.el7.x86_64 #1 SMP Tue May 15 18:22:15 EDT
2018 x86_64 x86_64 x86_64 GNU/Linux

```

Kernel self-reported vulnerability status:

(Continued on next page)



# SPEC CPU2017 Integer Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECspeed2017\_int\_base = 10.4

Thinksystem SR250  
(3.80 GHz, Intel Xeon E-2186G)

SPECspeed2017\_int\_peak = Not Run

CPU2017 License: 9017

Test Date: Nov-2018

Test Sponsor: Lenovo Global Technology

Hardware Availability: Jan-2019

Tested by: Lenovo Global Technology

Software Availability: May-2018

### Platform Notes (Continued)

CVE-2017-5754 (Meltdown): Mitigation: PTI  
CVE-2017-5753 (Spectre variant 1): Mitigation: Load fences  
CVE-2017-5715 (Spectre variant 2): Mitigation: IBRS (kernel)

run-level 3 Nov 6 15:36

SPEC is set to: /home/cpu2017-1.0.5-ic18.0u2  
Filesystem Type Size Used Avail Use% Mounted on  
/dev/sda2 xfs 365G 6.3G 359G 2% /home

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS Lenovo -[ISE105G-1.01]- 10/25/2018  
Memory:  
4x Micron 18ASF2G72AZ-2G6D1 16 GB 2 rank 2666

(End of data from sysinfo program)

### Compiler Version Notes

=====  
CC 600.perlbench\_s(base) 602.gcc\_s(base) 605.mcf\_s(base) 625.x264\_s(base)  
657.xz\_s(base)  
-----

icc (ICC) 18.0.2 20180210  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.  
-----

=====  
CXXC 620.omnetpp\_s(base) 623.xalancbmk\_s(base) 631.deepsjeng\_s(base)  
641.leela\_s(base)  
-----

icpc (ICC) 18.0.2 20180210  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.  
-----

=====  
FC 648.exchange2\_s(base)  
-----

ifort (IFORT) 18.0.2 20180210  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.  
-----



# SPEC CPU2017 Integer Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

**Lenovo Global Technology**

SPECspeed2017\_int\_base = 10.4

Thinksystem SR250  
(3.80 GHz, Intel Xeon E-2186G)

SPECspeed2017\_int\_peak = Not Run

**CPU2017 License:** 9017

**Test Date:** Nov-2018

**Test Sponsor:** Lenovo Global Technology

**Hardware Availability:** Jan-2019

**Tested by:** Lenovo Global Technology

**Software Availability:** May-2018

## Base Compiler Invocation

C benchmarks:

```
icc -m64 -std=c11
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

## Base Portability Flags

```
600.perlbench_s: -DSPEC_LP64 -DSPEC_LINUX_X64
602.gcc_s: -DSPEC_LP64
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -DSPEC_LP64 -DSPEC_LINUX
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64
```

## Base Optimization Flags

C benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -qopenmp -DSPEC_OPENMP
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

C++ benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib -ljemalloc
```

Fortran benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs
-L/usr/local/je5.0.1-64/lib -ljemalloc
```



# SPEC CPU2017 Integer Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Lenovo Global Technology

Thinksystem SR250  
(3.80 GHz, Intel Xeon E-2186G)

SPECspeed2017\_int\_base = 10.4

SPECspeed2017\_int\_peak = Not Run

**CPU2017 License:** 9017

**Test Sponsor:** Lenovo Global Technology

**Tested by:** Lenovo Global Technology

**Test Date:** Nov-2018

**Hardware Availability:** Jan-2019

**Software Availability:** May-2018

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-12-21.html>

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-SKL-H.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-12-21.xml>

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-SKL-H.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU2017 v1.0.5 on 2018-11-06 02:37:28-0500.

Report generated on 2018-11-27 13:34:25 by CPU2017 PDF formatter v6067.

Originally published on 2018-11-27.