



# SPEC® CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY RX2530 M5, Intel Xeon Platinum 8280L, 2.70GHz

SPECrate2017\_fp\_base = 282

SPECrate2017\_fp\_peak = Not Run

CPU2017 License: 19


Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Mar-2019

Hardware Availability: Apr-2019

Software Availability: Feb-2019

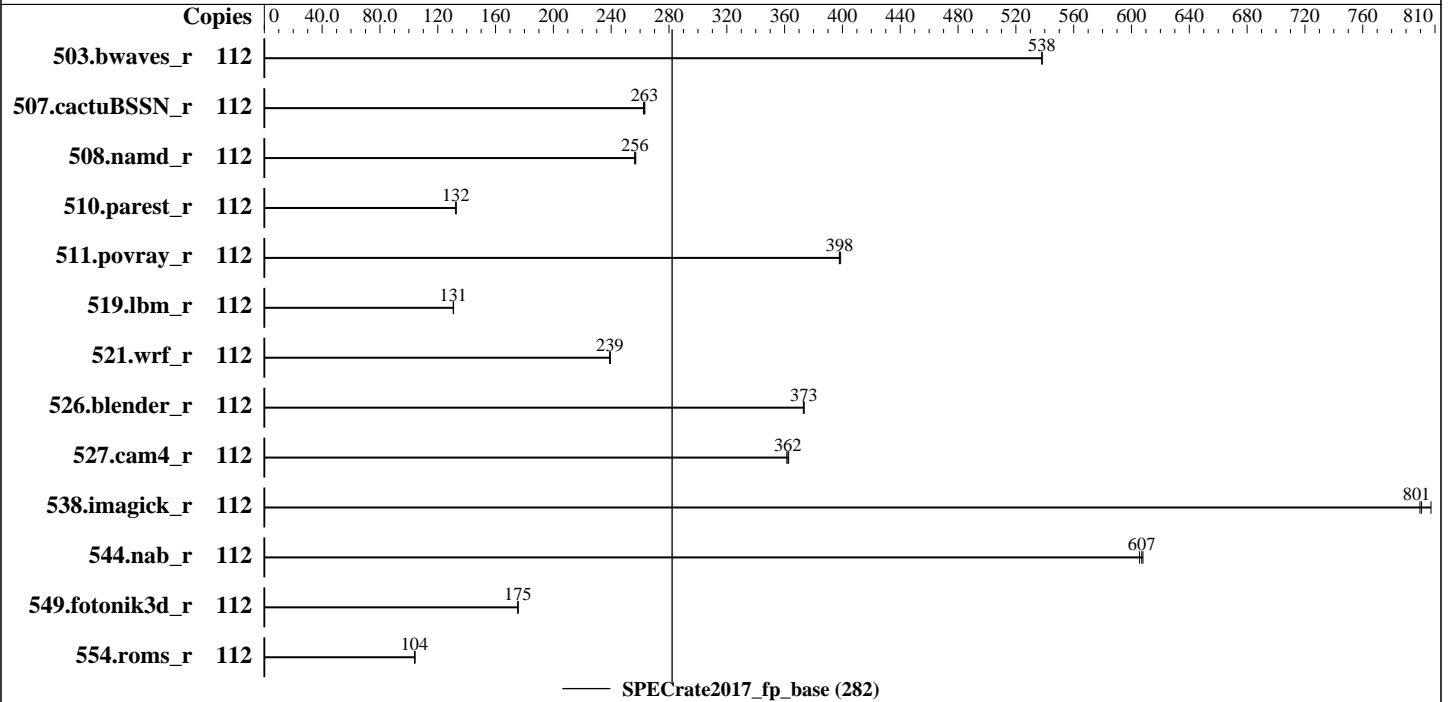

### Hardware

CPU Name: Intel Xeon Platinum 8280L  
 Max MHz.: 4000  
 Nominal: 2700  
 Enabled: 56 cores, 2 chips, 2 threads/core  
 Orderable: 1,2 chips  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 38.5 MB I+D on chip per chip  
 Other: None  
 Memory: 768 GB (24 x 32 GB 2Rx4 PC4-2933Y-R)  
 Storage: 1 x SATA M.2 SSD, 240GB  
 Other: None

### Software

OS: SUSE Linux Enterprise Server 15  
 4.12.14-25.28-default  
 Compiler: C/C++: Version 19.0.0.117 of Intel C/C++  
 Compiler for Linux;  
 Fortran: Version 19.0.0.117 of Intel Fortran  
 Compiler for Linux  
 Parallel: No  
 Firmware: Fujitsu BIOS Version V5.0.0.14 R1.8.0 for D3383-B1x. Released Jun-2019 tested as V5.0.0.14 R1.2.0 for D3383-B1x Feb-2019  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: Not Applicable  
 Other: None



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY RX2530 M5, Intel Xeon Platinum 8280L, 2.70GHz

SPECrate2017\_fp\_base = 282

SPECrate2017\_fp\_peak = Not Run

CPU2017 License: 19  
Test Sponsor: Fujitsu  
Tested by: Fujitsu

Test Date: Mar-2019  
Hardware Availability: Apr-2019  
Software Availability: Feb-2019

## Results Table

| Benchmark       | Base   |             |            |             |            |            |            | Peak   |         |       |         |       |         |       |
|-----------------|--------|-------------|------------|-------------|------------|------------|------------|--------|---------|-------|---------|-------|---------|-------|
|                 | Copies | Seconds     | Ratio      | Seconds     | Ratio      | Seconds    | Ratio      | Copies | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio |
| 503.bwaves_r    | 112    | 2087        | 538        | <b>2087</b> | <b>538</b> | 2087       | 538        |        |         |       |         |       |         |       |
| 507.cactuBSSN_r | 112    | <b>539</b>  | <b>263</b> | 539         | 263        | 541        | 262        |        |         |       |         |       |         |       |
| 508.namd_r      | 112    | 415         | 256        | 414         | 257        | <b>415</b> | <b>256</b> |        |         |       |         |       |         |       |
| 510.parest_r    | 112    | <b>2212</b> | <b>132</b> | 2207        | 133        | 2212       | 132        |        |         |       |         |       |         |       |
| 511.povray_r    | 112    | 656         | 399        | <b>657</b>  | <b>398</b> | 657        | 398        |        |         |       |         |       |         |       |
| 519.lbm_r       | 112    | 903         | 131        | <b>903</b>  | <b>131</b> | 902        | 131        |        |         |       |         |       |         |       |
| 521.wrf_r       | 112    | <b>1049</b> | <b>239</b> | 1050        | 239        | 1048       | 239        |        |         |       |         |       |         |       |
| 526.blender_r   | 112    | 457         | 373        | <b>457</b>  | <b>373</b> | 457        | 373        |        |         |       |         |       |         |       |
| 527.cam4_r      | 112    | 542         | 361        | 540         | 363        | <b>541</b> | <b>362</b> |        |         |       |         |       |         |       |
| 538.imagick_r   | 112    | 348         | 800        | 345         | 807        | <b>348</b> | <b>801</b> |        |         |       |         |       |         |       |
| 544.nab_r       | 112    | 311         | 606        | <b>310</b>  | <b>607</b> | 310        | 608        |        |         |       |         |       |         |       |
| 549.fotonik3d_r | 112    | 2488        | 175        | <b>2487</b> | <b>175</b> | 2486       | 176        |        |         |       |         |       |         |       |
| 554.roms_r      | 112    | <b>1712</b> | <b>104</b> | 1705        | 104        | 1712       | 104        |        |         |       |         |       |         |       |

SPECrate2017\_fp\_base = 282

SPECrate2017\_fp\_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"  
Kernel Boot Parameter set with : nohz\_full=1-111  
Process tuning settings:  
echo 10000000 > /proc/sys/kernel/sched\_min\_granularity\_ns

## General Notes

Environment variables set by runcpu before the start of the run:  
LD\_LIBRARY\_PATH = "/home/Benchmark/speccpu2017-1.0.5/iccl9-lib/intel64"

Binaries compiled on a system with 2x Intel Xeon E5-2667 v2 CPU + 64GB RAM  
memory using SUSE Linux Enterprise Server 12 SP2  
Transparent Huge Pages enabled by default  
Prior to runcpu invocation  
Filesystem page cache synced and cleared with:  
sync; echo 3 > /proc/sys/vm/drop\_caches

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY RX2530 M5, Intel Xeon Platinum 8280L, 2.70GHz

SPECrate2017\_fp\_base = 282

SPECrate2017\_fp\_peak = Not Run

**CPU2017 License:** 19  
**Test Sponsor:** Fujitsu  
**Tested by:** Fujitsu

**Test Date:** Mar-2019  
**Hardware Availability:** Apr-2019  
**Software Availability:** Feb-2019

### General Notes (Continued)

runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

### Platform Notes

BIOS configuration:  
Patrol Scrub = Disabled  
WR CRC feature Control = Disabled  
Fan Control = Full  
Sysinfo program /home/Benchmark/speccpu2017-1.0.5/bin/sysinfo  
Rev: r5974 of 2018-05-19 9bcde8f2999c33d61f64985e45859ea9  
running on RX2530M5 Fri Mar 15 19:54:23 2019

SUT (System Under Test) info as seen by some common utilities.  
For more information on this section, see  
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo  
model name : Intel(R) Xeon(R) Platinum 8280L CPU @ 2.70GHz  
2 "physical id"s (chips)  
112 "processors"  
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)  
cpu cores : 28  
siblings : 56  
physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27 28 29 30  
physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27 28 29 30

From lscpu:  
Architecture: x86\_64  
CPU op-mode(s): 32-bit, 64-bit  
Byte Order: Little Endian  
CPU(s): 112  
On-line CPU(s) list: 0-111  
Thread(s) per core: 2  
Core(s) per socket: 28  
Socket(s): 2

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY RX2530 M5, Intel Xeon Platinum 8280L, 2.70GHz

SPECrate2017\_fp\_base = 282

SPECrate2017\_fp\_peak = Not Run

CPU2017 License: 19  
Test Sponsor: Fujitsu  
Tested by: Fujitsu

Test Date: Mar-2019  
Hardware Availability: Apr-2019  
Software Availability: Feb-2019

### Platform Notes (Continued)

```

NUMA node(s): 4
Vendor ID: GenuineIntel
CPU family: 6
Model: 85
Model name: Intel(R) Xeon(R) Platinum 8280L CPU @ 2.70GHz
Stepping: 6
CPU MHz: 2700.000
CPU max MHz: 4000.0000
CPU min MHz: 1000.0000
BogoMIPS: 5400.00
Virtualization: VT-x
L1d cache: 32K
L1i cache: 32K
L2 cache: 1024K
L3 cache: 39424K
NUMA node0 CPU(s): 0-3,7-9,14-17,21-23,56-59,63-65,70-73,77-79
NUMA node1 CPU(s): 4-6,10-13,18-20,24-27,60-62,66-69,74-76,80-83
NUMA node2 CPU(s): 28-31,35-37,42-45,49-51,84-87,91-93,98-101,105-107
NUMA node3 CPU(s): 32-34,38-41,46-48,52-55,88-90,94-97,102-104,108-111
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
aperfmpperf pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave
avx fl6c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cdp_l3
invpcid_single ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi flexpriority
ept vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm mpx rdt_a
avx512f avx512dq rdseed adx smap clflushopt clwb intel_pt avx512cd avx512bw avx512vl
xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
dtherm ida arat pln pts hwp hwp_act_window hwp_epp hwp_pkg_req pku ospke avx512_vnni
flush_lld arch_capabilities

```

```
/proc/cpuinfo cache data
cache size : 39424 KB
```

```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a
physical chip.
available: 4 nodes (0-3)
node 0 cpus: 0 1 2 3 7 8 9 14 15 16 17 21 22 23 56 57 58 59 63 64 65 70 71 72 73 77 78
79
node 0 size: 191966 MB
node 0 free: 191652 MB
node 1 cpus: 4 5 6 10 11 12 13 18 19 20 24 25 26 27 60 61 62 66 67 68 69 74 75 76 80 81
82 83
node 1 size: 193530 MB
node 1 free: 193104 MB
node 2 cpus: 28 29 30 31 35 36 37 42 43 44 45 49 50 51 84 85 86 87 91 92 93 98 99 100

```

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY RX2530 M5, Intel Xeon Platinum 8280L, 2.70GHz

SPECrate2017\_fp\_base = 282

SPECrate2017\_fp\_peak = Not Run

**CPU2017 License:** 19  
**Test Sponsor:** Fujitsu  
**Tested by:** Fujitsu

**Test Date:** Mar-2019  
**Hardware Availability:** Apr-2019  
**Software Availability:** Feb-2019

### Platform Notes (Continued)

```

101 105 106 107
node 2 size: 193501 MB
node 2 free: 193218 MB
node 3 cpus: 32 33 34 38 39 40 41 46 47 48 52 53 54 55 88 89 90 94 95 96 97 102 103 104
108 109 110 111
node 3 size: 193318 MB
node 3 free: 192933 MB
node distances:
node  0  1  2  3
  0:  10  11  21  21
  1:  11  10  21  21
  2:  21  21  10  11
  3:  21  21  11  10

From /proc/meminfo
MemTotal:          790851788 kB
HugePages_Total:      0
Hugepagesize:       2048 kB

From /etc/*release* /etc/*version*
os-release:
NAME="SLES"
VERSION="15"
VERSION_ID="15"
PRETTY_NAME="SUSE Linux Enterprise Server 15"
ID="sles"
ID_LIKE="suse"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:15"

uname -a:
Linux RX2530M5 4.12.14-25.28-default #1 SMP Wed Jan 16 20:00:47 UTC 2019 (dd6077c)
x86_64 x86_64 x86_64 GNU/Linux

Kernel self-reported vulnerability status:

CVE-2017-5754 (Meltdown):          Not affected
CVE-2017-5753 (Spectre variant 1): Mitigation: __user pointer sanitization
CVE-2017-5715 (Spectre variant 2): Mitigation: Enhanced IBRS, IBPB: conditional, RSB
filling

run-level 3 Mar 15 19:52

SPEC is set to: /home/Benchmark/speccpu2017-1.0.5
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda5        xfs   191G  62G  130G  33% /home

```

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY RX2530 M5, Intel Xeon Platinum 8280L, 2.70GHz

SPECrate2017\_fp\_base = 282

SPECrate2017\_fp\_peak = Not Run

**CPU2017 License:** 19  
**Test Sponsor:** Fujitsu  
**Tested by:** Fujitsu

**Test Date:** Mar-2019  
**Hardware Availability:** Apr-2019  
**Software Availability:** Feb-2019

### Platform Notes (Continued)

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS FUJITSU // American Megatrends Inc. V5.0.0.14 R1.2.0 for D3383-Blx  
02/28/2019

Memory:

24x Samsung M393A4K40CB2-CVF 32 GB 2 rank 2933, configured at 2934

(End of data from sysinfo program)

### Compiler Version Notes

=====  
CC 519.lbm\_r(base) 538.imagick\_r(base) 544.nab\_r(base)  
=====

icc (ICC) 19.0.0.117 20180804  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.  
=====

=====  
CXXC 508.namd\_r(base) 510.parest\_r(base)  
=====

icpc (ICC) 19.0.0.117 20180804  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.  
=====

=====  
CC 511.povray\_r(base) 526.blender\_r(base)  
=====

icpc (ICC) 19.0.0.117 20180804  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.  
icc (ICC) 19.0.0.117 20180804  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.  
=====

=====  
FC 507.cactuBSSN\_r(base)  
=====

icpc (ICC) 19.0.0.117 20180804  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.  
icc (ICC) 19.0.0.117 20180804  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.  
ifort (IFORT) 19.0.0.117 20180804  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.  
=====

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

**Fujitsu**

PRIMERGY RX2530 M5, Intel Xeon Platinum 8280L, 2.70GHz

SPECrate2017\_fp\_base = 282

SPECrate2017\_fp\_peak = Not Run

CPU2017 License: 19  
Test Sponsor: Fujitsu  
Tested by: Fujitsu

Test Date: Mar-2019  
Hardware Availability: Apr-2019  
Software Availability: Feb-2019

## Compiler Version Notes (Continued)

=====  
FC 503.bwaves\_r(base) 549.fotonik3d\_r(base) 554.roms\_r(base)  
=====

ifort (IFORT) 19.0.0.117 20180804  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.  
=====

=====  
CC 521.wrf\_r(base) 527.cam4\_r(base)  
=====

ifort (IFORT) 19.0.0.117 20180804  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.  
icc (ICC) 19.0.0.117 20180804  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.  
=====

## Base Compiler Invocation

C benchmarks:

icc -m64 -std=c11

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

ifort -m64 icc -m64 -std=c11

Benchmarks using both C and C++:

icpc -m64 icc -m64 -std=c11

Benchmarks using Fortran, C, and C++:

icpc -m64 icc -m64 -std=c11 ifort -m64

## Base Portability Flags

503.bwaves\_r: -DSPEC\_LP64  
507.cactuBSSN\_r: -DSPEC\_LP64  
508.namd\_r: -DSPEC\_LP64  
510.parest\_r: -DSPEC\_LP64

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

**Fujitsu**

PRIMERGY RX2530 M5, Intel Xeon Platinum 8280L,  
2.70GHz

SPECrate2017\_fp\_base = 282

SPECrate2017\_fp\_peak = Not Run

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Mar-2019

Hardware Availability: Apr-2019

Software Availability: Feb-2019

## Base Portability Flags (Continued)

```
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64
```

## Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3
```

C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3
```

Fortran benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -auto -nostandard-realloc-lhs
```

Benchmarks using both Fortran and C:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -auto -nostandard-realloc-lhs
```

Benchmarks using both C and C++:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3
```

Benchmarks using Fortran, C, and C++:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -auto -nostandard-realloc-lhs
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0u2-official-linux64.html>

<http://www.spec.org/cpu2017/flags/Fujitsu-Platform-Settings-V1.0-CSL-RevA.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0u2-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/Fujitsu-Platform-Settings-V1.0-CSL-RevA.xml>





# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

**Fujitsu**

PRIMERGY RX2530 M5, Intel Xeon Platinum 8280L,  
2.70GHz

SPECrate2017\_fp\_base = 282

SPECrate2017\_fp\_peak = Not Run

**CPU2017 License:** 19

**Test Sponsor:** Fujitsu

**Tested by:** Fujitsu

**Test Date:** Mar-2019

**Hardware Availability:** Apr-2019

**Software Availability:** Feb-2019

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU2017 v1.0.5 on 2019-03-15 06:54:23-0400.

Report generated on 2019-05-23 12:40:54 by CPU2017 PDF formatter v6067.

Originally published on 2019-04-02.