



SPEC® CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR850
(2.70 GHz, Intel Xeon Platinum 8270)

SPECrate2017_int_base = 623

SPECrate2017_int_peak = Not Run

CPU2017 License: 9017


Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Apr-2019

Hardware Availability: Apr-2019

Software Availability: Dec-2018

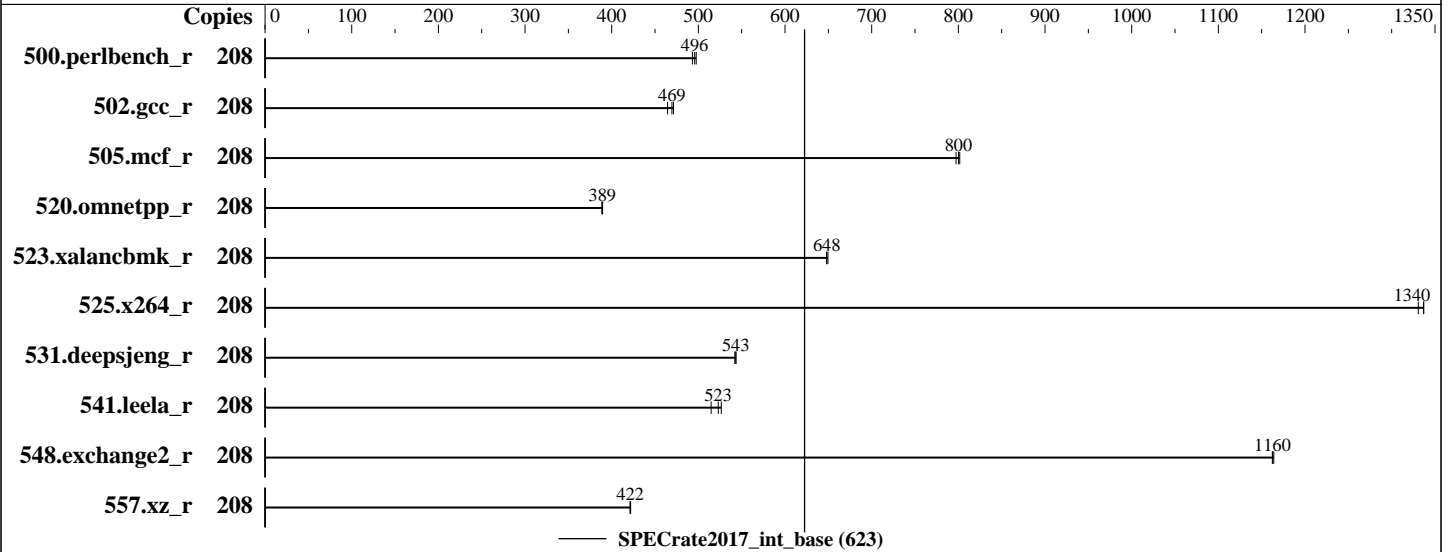

Hardware

CPU Name: Intel Xeon Platinum 8270
 Max MHz.: 4000
 Nominal: 2700
 Enabled: 104 cores, 4 chips, 2 threads/core
 Orderable: 2,4 chips
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 35.75 MB I+D on chip per chip
 Other: None
 Memory: 1536 GB (48 x 32 GB 2Rx4 PC4-2933Y-R)
 Storage: 800 GB tmpfs
 Other: None

Software

OS: SUSE Linux Enterprise Server 12 SP4 (x86_64)
 Kernel 4.12.14-94.41-default
 Compiler: C/C++: Version 19.0.1.144 of Intel C/C++
 Compiler Build 20181018 for Linux;
 Fortran: Version 19.0.1.144 of Intel Fortran
 Compiler Build 20181018 for Linux
 Parallel: No
 Firmware: Lenovo BIOS Version TEE135T 2.10 released Mar-2019
 File System: tmpfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: Not Applicable
 Other: None



SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR850
(2.70 GHz, Intel Xeon Platinum 8270)

SPECrate2017_int_base = 623

SPECrate2017_int_peak = Not Run

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Apr-2019
Hardware Availability: Apr-2019
Software Availability: Dec-2018

Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio		
500.perlbench_r	208	671	493	668	496	666	498									
502.gcc_r	208	625	471	634	464	627	469									
505.mcf_r	208	422	797	420	800	419	802									
520.omnetpp_r	208	701	389	702	389	701	390									
523.xalancbmk_r	208	339	648	339	648	338	650									
525.x264_r	208	272	1340	274	1330	272	1340									
531.deepsjeng_r	208	440	542	439	543	439	543									
541.leela_r	208	659	523	654	526	669	515									
548.exchange2_r	208	469	1160	469	1160	468	1160									
557.xz_r	208	533	422	533	422	533	421									

SPECrate2017_int_base = 623

SPECrate2017_int_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
Tmpfs filesystem can be set with:
mount -t tmpfs -o size=800g tmpfs /home
Process tuning setting:
echo 50000 > /proc/sys/kernel/sched_cfs_bandwidth_slice_us
echo 240000000 > /proc/sys/kernel/sched_latency_ns
echo 5000000 > /proc/sys/kernel/sched_migration_cost_ns
echo 100000000 > /proc/sys/kernel/sched_min_granularity_ns
echo 150000000 > /proc/sys/kernel/sched_wakeup_granularity_ns
```

General Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2017-1.0.5-ic19.0u1/lib/intel64"

Binaries compiled on a system with 1x Intel Core i9-7900X CPU + 32GB RAM
memory using Redhat Enterprise Linux 7.5
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECrate2017_int_base = 623

ThinkSystem SR850
(2.70 GHz, Intel Xeon Platinum 8270)

SPECrate2017_int_peak = Not Run

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Apr-2019
Hardware Availability: Apr-2019
Software Availability: Dec-2018

General Notes (Continued)

```
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
```

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2018-3640 (Spectre variant 3a) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2018-3639 (Spectre variant 4) is mitigated in the system as tested and documented.

Platform Notes

BIOS configuration:

Choose Operating Mode set to Maximum Performance

DCU Streamer Prefetcher set to Disable

SNC set to Enable

```
Sysinfo program /home/cpu2017-1.0.5-ic19.0u1/bin/sysinfo
Rev: r5974 of 2018-05-19 9bcde8f2999c33d61f64985e45859ea9
running on linux-9o83 Mon Apr 15 23:54:30 2019
```

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : Intel(R) Xeon(R) Platinum 8270 CPU @ 2.70GHz
```

```
4 "physical id"s (chips)
```

```
208 "processors"
```

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

```
cpu cores : 26
```

```
siblings : 52
```

```
physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 16 17 18 19 20 21 22 24 25 26 27 28
29
```

```
physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 16 17 18 19 20 21 22 24 25 26 27 28
29
```

```
physical 2: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 16 17 18 19 20 21 22 24 25 26 27 28
29
```

```
physical 3: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 16 17 18 19 20 21 22 24 25 26 27 28
29
```

From lscpu:

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECrate2017_int_base = 623

ThinkSystem SR850
(2.70 GHz, Intel Xeon Platinum 8270)

SPECrate2017_int_peak = Not Run

CPU2017 License: 9017

Test Date: Apr-2019

Test Sponsor: Lenovo Global Technology

Hardware Availability: Apr-2019

Tested by: Lenovo Global Technology

Software Availability: Dec-2018

Platform Notes (Continued)

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:            Little Endian
CPU(s):                208
On-line CPU(s) list:   0-207
Thread(s) per core:    2
Core(s) per socket:    26
Socket(s):             4
NUMA node(s):         8
Vendor ID:             GenuineIntel
CPU family:            6
Model:                 85
Model name:            Intel(R) Xeon(R) Platinum 8270 CPU @ 2.70GHz
Stepping:              6
CPU MHz:               2700.000
CPU max MHz:           4000.0000
CPU min MHz:           1000.0000
BogoMIPS:              5400.00
Virtualization:        VT-x
L1d cache:             32K
L1i cache:             32K
L2 cache:              1024K
L3 cache:              36608K
NUMA node0 CPU(s):    0-3,7-9,13-15,20-22,104-107,111-113,117-119,124-126
NUMA node1 CPU(s):    4-6,10-12,16-19,23-25,108-110,114-116,120-123,127-129
NUMA node2 CPU(s):    26-29,33-35,39-41,46-48,130-133,137-139,143-145,150-152
NUMA node3 CPU(s):    30-32,36-38,42-45,49-51,134-136,140-142,146-149,153-155
NUMA node4 CPU(s):    52-55,59-61,65-67,72-74,156-159,163-165,169-171,176-178
NUMA node5 CPU(s):    56-58,62-64,68-71,75-77,160-162,166-168,172-175,179-181
NUMA node6 CPU(s):    78-81,85-87,91-93,98-100,182-185,189-191,195-197,202-204
NUMA node7 CPU(s):    82-84,88-90,94-97,101-103,186-188,192-194,198-201,205-207
Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
aperfmpperf pni pclmulqdq dtes64 ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm
pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c
rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cdp_l3 invpcid_single ssbd
mba ibrs ibpb stibp tpr_shadow vnmi flexpriority ept vpid fsgsbase tsc_adjust bmi1
hle avx2 smep bmi2 erms invpcid rtm cqm mpx rdt_a avx512f avx512dq rdseed adx smap
clflushopt clwb intel_pt avx512cd avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves
cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local dtherm ida arat pln pts pku ospke
avx512_vnni flush_lld arch_capabilities

```

```
/proc/cpuinfo cache data
cache size : 36608 KB
```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECrate2017_int_base = 623

ThinkSystem SR850
(2.70 GHz, Intel Xeon Platinum 8270)

SPECrate2017_int_peak = Not Run

CPU2017 License: 9017

Test Date: Apr-2019

Test Sponsor: Lenovo Global Technology

Hardware Availability: Apr-2019

Tested by: Lenovo Global Technology

Software Availability: Dec-2018

Platform Notes (Continued)

physical chip.

available: 8 nodes (0-7)

node 0 cpus: 0 1 2 3 7 8 9 13 14 15 20 21 22 104 105 106 107 111 112 113 117 118 119
124 125 126

node 0 size: 193132 MB

node 0 free: 181058 MB

node 1 cpus: 4 5 6 10 11 12 16 17 18 19 23 24 25 108 109 110 114 115 116 120 121 122
123 127 128 129

node 1 size: 193525 MB

node 1 free: 192028 MB

node 2 cpus: 26 27 28 29 33 34 35 39 40 41 46 47 48 130 131 132 133 137 138 139 143 144
145 150 151 152

node 2 size: 193525 MB

node 2 free: 193299 MB

node 3 cpus: 30 31 32 36 37 38 42 43 44 45 49 50 51 134 135 136 140 141 142 146 147 148
149 153 154 155

node 3 size: 193525 MB

node 3 free: 193293 MB

node 4 cpus: 52 53 54 55 59 60 61 65 66 67 72 73 74 156 157 158 159 163 164 165 169 170
171 176 177 178

node 4 size: 193496 MB

node 4 free: 193279 MB

node 5 cpus: 56 57 58 62 63 64 68 69 70 71 75 76 77 160 161 162 166 167 168 172 173 174
175 179 180 181

node 5 size: 193525 MB

node 5 free: 193319 MB

node 6 cpus: 78 79 80 81 85 86 87 91 92 93 98 99 100 182 183 184 185 189 190 191 195
196 197 202 203 204

node 6 size: 193525 MB

node 6 free: 193349 MB

node 7 cpus: 82 83 84 88 89 90 94 95 96 97 101 102 103 186 187 188 192 193 194 198 199
200 201 205 206 207

node 7 size: 193523 MB

node 7 free: 193345 MB

node distances:

node	0	1	2	3	4	5	6	7
0:	10	11	21	21	21	21	31	31
1:	11	10	21	21	21	21	31	31
2:	21	21	10	11	31	31	21	21
3:	21	21	11	10	31	31	21	21
4:	21	21	31	31	10	11	21	21
5:	21	21	31	31	11	10	21	21
6:	31	31	21	21	21	21	10	11
7:	31	31	21	21	21	21	11	10

From /proc/meminfo

MemTotal: 1584928912 kB

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECrate2017_int_base = 623

ThinkSystem SR850
(2.70 GHz, Intel Xeon Platinum 8270)

SPECrate2017_int_peak = Not Run

CPU2017 License: 9017

Test Date: Apr-2019

Test Sponsor: Lenovo Global Technology

Hardware Availability: Apr-2019

Tested by: Lenovo Global Technology

Software Availability: Dec-2018

Platform Notes (Continued)

HugePages_Total: 0
Hugepagesize: 2048 kB

From /etc/*release* /etc/*version*

SuSE-release:

SUSE Linux Enterprise Server 12 (x86_64)

VERSION = 12

PATCHLEVEL = 4

This file is deprecated and will be removed in a future service pack or release.

Please check /etc/os-release for details about this release.

os-release:

NAME="SLES"

VERSION="12-SP4"

VERSION_ID="12.4"

PRETTY_NAME="SUSE Linux Enterprise Server 12 SP4"

ID="sles"

ANSI_COLOR="0;32"

CPE_NAME="cpe:/o:suse:sles:12:sp4"

uname -a:

Linux linux-9o83 4.12.14-94.41-default #1 SMP Wed Oct 31 12:25:04 UTC 2018 (3090901)
x86_64 x86_64 x86_64 GNU/Linux

Kernel self-reported vulnerability status:

CVE-2017-5754 (Meltdown): Not affected

CVE-2017-5753 (Spectre variant 1): Mitigation: __user pointer sanitization

CVE-2017-5715 (Spectre variant 2): Mitigation: Indirect Branch Restricted Speculation, IBPB, IBRS_FW

run-level 3 Apr 15 23:50

SPEC is set to: /home/cpu2017-1.0.5-ic19.0u1

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
tmpfs	tmpfs	800G	8.3G	792G	2%	/home

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS Lenovo -[TEE135T-2.10]- 03/21/2019

Memory:

48x Samsung M393A4K40CB2-CVF 32 GB 2 rank 2933

(End of data from sysinfo program)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECrate2017_int_base = 623

ThinkSystem SR850
(2.70 GHz, Intel Xeon Platinum 8270)

SPECrate2017_int_peak = Not Run

CPU2017 License: 9017

Test Date: Apr-2019

Test Sponsor: Lenovo Global Technology

Hardware Availability: Apr-2019

Tested by: Lenovo Global Technology

Software Availability: Dec-2018

Compiler Version Notes

=====
CC 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base) 525.x264_r(base)
557.xz_r(base)
=====

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====
CXXC 520.omnetpp_r(base) 523.xalancbmk_r(base) 531.deepsjeng_r(base)
541.leela_r(base)
=====

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====
FC 548.exchange2_r(base)
=====

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
64, Version 19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icc -m64 -std=c11

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Base Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64

502.gcc_r: -DSPEC_LP64

505.mcf_r: -DSPEC_LP64

520.omnetpp_r: -DSPEC_LP64

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECrate2017_int_base = 623

ThinkSystem SR850
(2.70 GHz, Intel Xeon Platinum 8270)

SPECrate2017_int_peak = Not Run

CPU2017 License: 9017

Test Date: Apr-2019

Test Sponsor: Lenovo Global Technology

Hardware Availability: Apr-2019

Tested by: Lenovo Global Technology

Software Availability: Dec-2018

Base Portability Flags (Continued)

```
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.1.144/linux/compiler/lib/intel64
-lqkmalloc
```

C++ benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.1.144/linux/compiler/lib/intel64
-lqkmalloc
```

Fortran benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs -align array32byte
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.1.144/linux/compiler/lib/intel64
-lqkmalloc
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2019-04-02.html>

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-CLX-A.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2019-04-02.xml>

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-CLX-A.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU2017 v1.0.5 on 2019-04-15 11:54:30-0400.

Report generated on 2019-04-30 17:44:59 by CPU2017 PDF formatter v6067.

Originally published on 2019-04-30.