



# SPEC® CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Huawei

SPECrate2017\_int\_base = 268

Huawei 5288 V5 (Intel Xeon Platinum 8260M)

SPECrate2017\_int\_peak = Not Run

CPU2017 License: 3175


Test Sponsor: Huawei

Tested by: Huawei

Test Date: Apr-2019

Hardware Availability: Apr-2019

Software Availability: Dec-2018

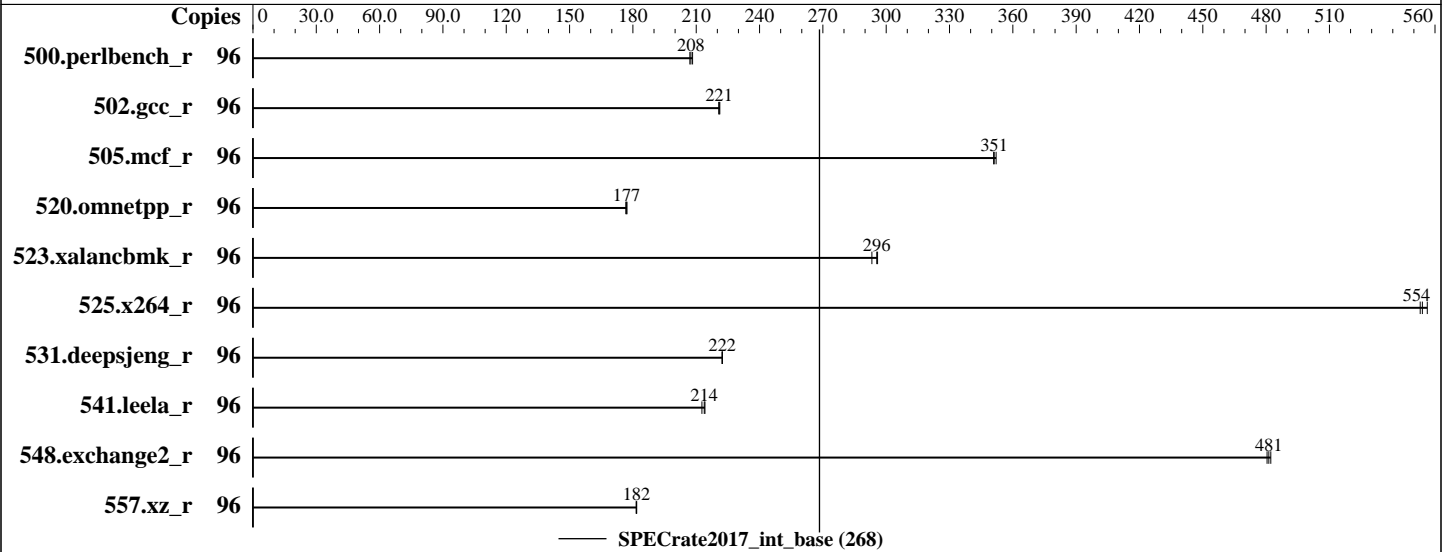

### Hardware

CPU Name: Intel Xeon Platinum 8260M  
 Max MHz.: 3900  
 Nominal: 2400  
 Enabled: 48 cores, 2 chips, 2 threads/core  
 Orderable: 1,2 chips  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 35.75 MB I+D on chip per chip  
 Other: None  
 Memory: 384 GB (24 x 16 GB 2Rx8 PC4-2933Y-R)  
 Storage: 1 x 1200 GB SAS, 10000 RPM  
 Other: None

### Software

OS: SUSE Linux Enterprise Server 12 SP4 (x86\_64)  
 4.12.14-94.41-default  
 Compiler: C/C++: Version 19.0.1.144 of Intel C/C++  
 Compiler Build 20181018 for Linux;  
 Fortran: Version 19.0.1.144 of Intel Fortran  
 Compiler Build 20181018 for Linux  
 Parallel: No  
 Firmware: Version 6.52 Released Mar-2019  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: Not Applicable  
 Other: None



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Huawei

SPECrate2017\_int\_base = 268

Huawei 5288 V5 (Intel Xeon Platinum 8260M)

SPECrate2017\_int\_peak = Not Run

CPU2017 License: 3175  
Test Sponsor: Huawei  
Tested by: Huawei

Test Date: Apr-2019  
Hardware Availability: Apr-2019  
Software Availability: Dec-2018

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	96	734	208	<b><u>737</u></b>	<b><u>208</u></b>	738	207							
502.gcc_r	96	615	221	<b><u>615</u></b>	<b><u>221</u></b>	616	221							
505.mcf_r	96	442	351	441	352	<b><u>442</u></b>	<b><u>351</u></b>							
520.omnetpp_r	96	713	177	711	177	<b><u>711</u></b>	<b><u>177</u></b>							
523.xalancbmk_r	96	<b><u>343</u></b>	<b><u>296</u></b>	343	296	346	293							
525.x264_r	96	<b><u>303</u></b>	<b><u>554</u></b>	302	556	304	553							
531.deepsjeng_r	96	495	222	<b><u>495</u></b>	<b><u>222</u></b>	495	222							
541.leela_r	96	747	213	742	214	<b><u>744</u></b>	<b><u>214</u></b>							
548.exchange2_r	96	<b><u>523</u></b>	<b><u>481</u></b>	522	482	524	480							
557.xz_r	96	<b><u>571</u></b>	<b><u>182</u></b>	570	182	571	182							

SPECrate2017\_int\_base = 268

SPECrate2017\_int\_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## General Notes

Environment variables set by runcpu before the start of the run:

LD\_LIBRARY\_PATH = "/spec2017/lib/ia32:/spec2017/lib/intel64:/spec2017/je5.0.1-32:/spec2017/je5.0.1-64"

Binaries compiled on a system with 1x Intel Core i9-7900X CPU + 32GB RAM  
memory using Redhat Enterprise Linux 7.5  
Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches
```

runcpu command invoked through numactl i.e.:

```
numactl --interleave=all runcpu <etc>
```

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Huawei

SPECrate2017\_int\_base = 268

Huawei 5288 V5 (Intel Xeon Platinum 8260M)

SPECrate2017\_int\_peak = Not Run

CPU2017 License: 3175

Test Sponsor: Huawei

Tested by: Huawei

Test Date: Apr-2019

Hardware Availability: Apr-2019

Software Availability: Dec-2018

## General Notes (Continued)

is mitigated in the system as tested and documented.

## Platform Notes

BIOS configuration:

Power Policy Set to Performance

SNC Set to Enabled

IMC Interleaving Set to 1-way Interleave

XPT Prefetch Set to Enabled

Sysinfo program /spec2017/bin/sysinfo

Rev: r5974 of 2018-05-19 9bcde8f2999c33d61f64985e45859ea9

running on sles12sp4 Fri Apr 12 20:45:27 2019

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) Platinum 8260M CPU @ 2.40GHz

2 "physical id"s (chips)

96 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 24

siblings : 48

physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 16 17 18 19 20 21 25 26 27 28 29

physical 1: cores 0 1 2 3 4 5 6 8 10 11 12 13 16 17 18 19 20 21 24 25 26 27 28 29

From lscpu:

Architecture: x86\_64

CPU op-mode(s): 32-bit, 64-bit

Byte Order: Little Endian

CPU(s): 96

On-line CPU(s) list: 0-95

Thread(s) per core: 2

Core(s) per socket: 24

Socket(s): 2

NUMA node(s): 4

Vendor ID: GenuineIntel

CPU family: 6

Model: 85

Model name: Intel(R) Xeon(R) Platinum 8260M CPU @ 2.40GHz

Stepping: 6

CPU MHz: 2400.000

CPU max MHz: 3900.0000

CPU min MHz: 1000.0000

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Huawei

SPECrate2017\_int\_base = 268

Huawei 5288 V5 (Intel Xeon Platinum 8260M)

SPECrate2017\_int\_peak = Not Run

CPU2017 License: 3175  
Test Sponsor: Huawei  
Tested by: Huawei

Test Date: Apr-2019  
Hardware Availability: Apr-2019  
Software Availability: Dec-2018

### Platform Notes (Continued)

```

BogoMIPS:          4800.00
Virtualization:    VT-x
L1d cache:         32K
L1i cache:         32K
L2 cache:          1024K
L3 cache:          36608K
NUMA node0 CPU(s): 0-3,7-9,13-15,19,20,48-51,55-57,61-63,67,68
NUMA node1 CPU(s): 4-6,10-12,16-18,21-23,52-54,58-60,64-66,69-71
NUMA node2 CPU(s): 24-27,31,32,36-38,42-44,72-75,79,80,84-86,90-92
NUMA node3 CPU(s): 28-30,33-35,39-41,45-47,76-78,81-83,87-89,93-95
Flags:             fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
aperfmpperf pni pclmulqdq dtes64 ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm
pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c
rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cdp_l3 invpcid_single ssbd
mba ibrs ibpb stibp tpr_shadow vnmi flexpriority ept vpid fsgsbase tsc_adjust bmi1
hle avx2 smep bmi2 erms invpcid rtm cqm mpx rdt_a avx512f avx512dq rdseed adx smap
clflushopt clwb intel_pt avx512cd avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves
cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local dtherm ida arat pln pts pku ospke
avx512_vnni flush_lld arch_capabilities

```

```

/proc/cpuinfo cache data
cache size : 36608 KB

```

```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a
physical chip.
available: 4 nodes (0-3)
node 0 cpus: 0 1 2 3 7 8 9 13 14 15 19 20 48 49 50 51 55 56 57 61 62 63 67 68
node 0 size: 95184 MB
node 0 free: 93979 MB
node 1 cpus: 4 5 6 10 11 12 16 17 18 21 22 23 52 53 54 58 59 60 64 65 66 69 70 71
node 1 size: 96713 MB
node 1 free: 95626 MB
node 2 cpus: 24 25 26 27 31 32 36 37 38 42 43 44 72 73 74 75 79 80 84 85 86 90 91 92
node 2 size: 96742 MB
node 2 free: 95574 MB
node 3 cpus: 28 29 30 33 34 35 39 40 41 45 46 47 76 77 78 81 82 83 87 88 89 93 94 95
node 3 size: 96531 MB
node 3 free: 95533 MB
node distances:
node  0  1  2  3
0:  10  11  21  21
1:  11  10  21  21
2:  21  21  10  11
3:  21  21  11  10

```

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Huawei

SPECrate2017\_int\_base = 268

Huawei 5288 V5 (Intel Xeon Platinum 8260M)

SPECrate2017\_int\_peak = Not Run

**CPU2017 License:** 3175  
**Test Sponsor:** Huawei  
**Tested by:** Huawei

**Test Date:** Apr-2019  
**Hardware Availability:** Apr-2019  
**Software Availability:** Dec-2018

### Platform Notes (Continued)

```

From /proc/meminfo
MemTotal:      394416876 kB
HugePages_Total:      0
Hugepagesize:    2048 kB

From /etc/*release* /etc/*version*
SuSE-release:
SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 4
# This file is deprecated and will be removed in a future service pack or release.
# Please check /etc/os-release for details about this release.
os-release:
NAME="SLES"
VERSION="12-SP4"
VERSION_ID="12.4"
PRETTY_NAME="SUSE Linux Enterprise Server 12 SP4"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12:sp4"

uname -a:
Linux sles12sp4 4.12.14-94.41-default #1 SMP Wed Oct 31 12:25:04 UTC 2018 (3090901)
x86_64 x86_64 x86_64 GNU/Linux

Kernel self-reported vulnerability status:

CVE-2017-5754 (Meltdown):      Not affected
CVE-2017-5753 (Spectre variant 1): Mitigation: __user pointer sanitization
CVE-2017-5715 (Spectre variant 2): Mitigation: Indirect Branch Restricted Speculation,
IBPB, IBRS_FW

run-level 3 Apr 12 05:22

SPEC is set to: /spec2017
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda3       xfs   700G   15G  686G   3% /

Additional information from dmidecode follows.  WARNING: Use caution when you interpret
this section. The 'dmidecode' program reads system data which is "intended to allow
hardware to be accurately determined", but the intent may not be met, as there are
frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
BIOS INSYDE Corp. 6.52 03/16/2019
Memory:
24x Samsung M393A2K43CB2-CVF 16 GB 2 rank 2933

(End of data from sysinfo program)

```



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Huawei

SPECrate2017\_int\_base = 268

Huawei 5288 V5 (Intel Xeon Platinum 8260M)

SPECrate2017\_int\_peak = Not Run

CPU2017 License: 3175  
Test Sponsor: Huawei  
Tested by: Huawei

Test Date: Apr-2019  
Hardware Availability: Apr-2019  
Software Availability: Dec-2018

## Compiler Version Notes

=====  
CC 500.perlbench\_r(base) 502.gcc\_r(base) 505.mcf\_r(base) 525.x264\_r(base)  
557.xz\_r(base)  
=====

-----  
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.1.144 Build 20181018  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.  
-----

=====  
CXXC 520.omnetpp\_r(base) 523.xalancbmk\_r(base) 531.deepsjeng\_r(base)  
541.leela\_r(base)  
=====

-----  
Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.1.144 Build 20181018  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.  
-----

=====  
FC 548.exchange2\_r(base)  
=====

-----  
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)  
64, Version 19.0.1.144 Build 20181018  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.  
-----

## Base Compiler Invocation

C benchmarks:  
icc -m64 -std=c11

C++ benchmarks:  
icpc -m64

Fortran benchmarks:  
ifort -m64

## Base Portability Flags

500.perlbench\_r: -DSPEC\_LP64 -DSPEC\_LINUX\_X64  
502.gcc\_r: -DSPEC\_LP64  
505.mcf\_r: -DSPEC\_LP64  
520.omnetpp\_r: -DSPEC\_LP64

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Huawei

SPECrate2017\_int\_base = 268

Huawei 5288 V5 (Intel Xeon Platinum 8260M)

SPECrate2017\_int\_peak = Not Run

CPU2017 License: 3175

Test Sponsor: Huawei

Tested by: Huawei

Test Date: Apr-2019

Hardware Availability: Apr-2019

Software Availability: Dec-2018

## Base Portability Flags (Continued)

```
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

## Base Optimization Flags

C benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.1.144/linux/compiler/lib/intel64
-lqkmalloc
```

C++ benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.1.144/linux/compiler/lib/intel64
-lqkmalloc
```

Fortran benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs -align array32byte
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.1.144/linux/compiler/lib/intel64
-lqkmalloc
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2019-04-02.html>

<http://www.spec.org/cpu2017/flags/Huawei-Platform-Settings-SKL-V1.9-revC.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2019-04-02.xml>

<http://www.spec.org/cpu2017/flags/Huawei-Platform-Settings-SKL-V1.9-revC.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU2017 v1.0.5 on 2019-04-12 20:45:27-0400.

Report generated on 2019-05-15 13:31:38 by CPU2017 PDF formatter v6067.

Originally published on 2019-05-14.