



# SPEC® CPU2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Hewlett Packard Enterprise

(Test Sponsor: HPE)

### ProLiant ML110 Gen10

(1.90 GHz, Intel Xeon Bronze 3204)

SPECspeed2017\_fp\_base = 24.8

SPECspeed2017\_fp\_peak = Not Run

CPU2017 License: 3


Test Sponsor: HPE

Tested by: HPE

Test Date: Apr-2019

Hardware Availability: Apr-2019

Software Availability: Feb-2019

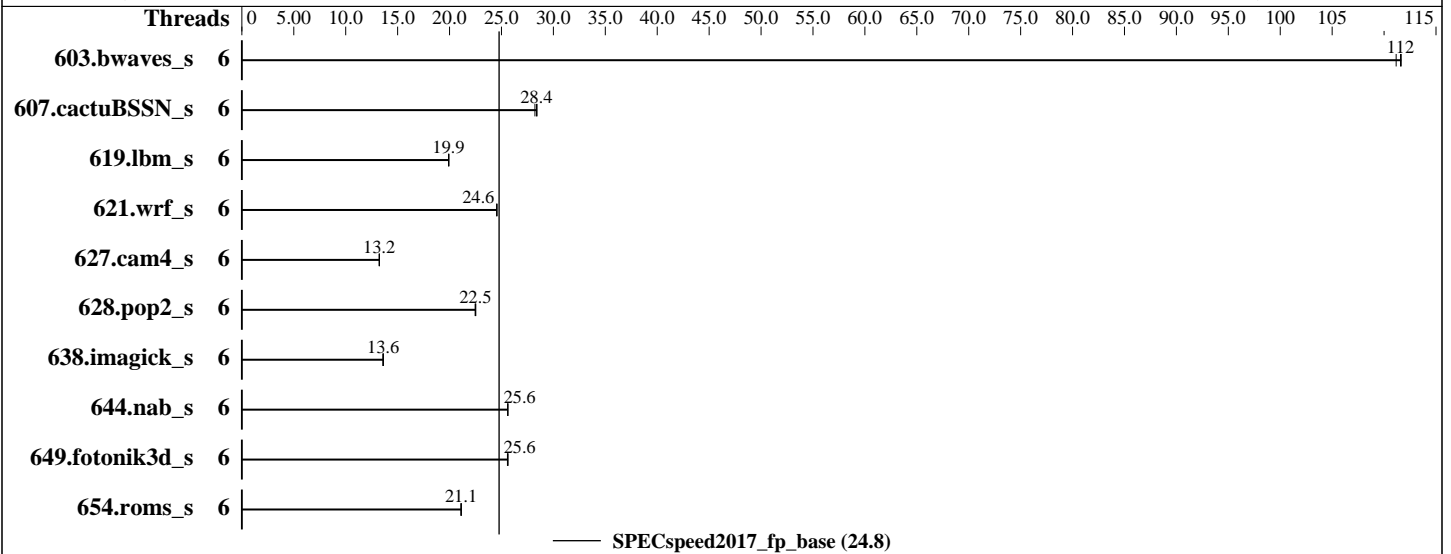

### Hardware

CPU Name: Intel Xeon Bronze 3204  
 Max MHz.: 1900  
 Nominal: 1900  
 Enabled: 6 cores, 1 chip  
 Orderable: 1 chip(s)  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 8.25 MB I+D on chip per chip  
 Other: None  
 Memory: 96 GB (6 x 16 GB 2Rx8 PC4-2666V-R, running at 2133)  
 Storage: 1 x 400 GB SAS SSD, RAID 0  
 Other: None

### Software

OS: SUSE Linux Enterprise Server 15 (x86\_64)  
 Kernel 4.12.14-23-default  
 Compiler: C/C++: Version 19.0.2.187 of Intel C/C++ Compiler Build 20190117 for Linux;  
 Fortran: Version 19.0.2.187 of Intel Fortran Compiler Build 20190117 for Linux  
 Parallel: Yes  
 Firmware: HPE BIOS Version U33 02/02/2019 released Apr-2019  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: Not Applicable  
 Other: None



# SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant ML110 Gen10**

(1.90 GHz, Intel Xeon Bronze 3204)

SPECspeed2017\_fp\_base = 24.8

SPECspeed2017\_fp\_peak = Not Run

**CPU2017 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Apr-2019  
**Hardware Availability:** Apr-2019  
**Software Availability:** Feb-2019

## Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	6	531	111	528	112	<b>529</b>	<b>112</b>							
607.cactuBSSN_s	6	586	28.4	<b>587</b>	<b>28.4</b>	591	28.2							
619.lbm_s	6	263	19.9	263	19.9	<b>263</b>	<b>19.9</b>							
621.wrf_s	6	539	24.6	539	24.6	<b>539</b>	<b>24.6</b>							
627.cam4_s	6	<b>670</b>	<b>13.2</b>	669	13.3	670	13.2							
628.pop2_s	6	<b>528</b>	<b>22.5</b>	527	22.5	529	22.5							
638.imagick_s	6	1058	13.6	1063	13.6	<b>1059</b>	<b>13.6</b>							
644.nab_s	6	682	25.6	<b>682</b>	<b>25.6</b>	682	25.6							
649.fotonik3d_s	6	356	25.6	356	25.6	<b>356</b>	<b>25.6</b>							
654.roms_s	6	746	21.1	745	21.1	<b>746</b>	<b>21.1</b>							

SPECspeed2017\_fp\_base = 24.8

SPECspeed2017\_fp\_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"  
Transparent Huge Pages enabled by default  
Prior to runcpu invocation  
Filesystem page cache synced and cleared with:  
sync; echo 3> /proc/sys/vm/drop\_caches

## General Notes

Environment variables set by runcpu before the start of the run:  
KMP\_AFFINITY = "granularity=fine,compact"  
LD\_LIBRARY\_PATH = "/home/cpu2017\_u2/lib/ia32:/home/cpu2017\_u2/lib/intel64"  
OMP\_STACKSIZE = "192M"

Binaries compiled on a system with 1x Intel Core i9-7900X CPU + 32GB RAM  
memory using Redhat Enterprise Linux 7.5

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

## Platform Notes

BIOS Configuration:  
Thermal Configuration set to Maximum Cooling  
Memory Patrol Scrubbing set to Disabled

(Continued on next page)



# SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant ML110 Gen10**

(1.90 GHz, Intel Xeon Bronze 3204)

SPECspeed2017\_fp\_base = 24.8

SPECspeed2017\_fp\_peak = Not Run

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Apr-2019

**Hardware Availability:** Apr-2019

**Software Availability:** Feb-2019

## Platform Notes (Continued)

LLC Prefetch set to Enabled  
 LLC Dead Line Allocation set to Disabled  
 Workload Profile set to General Peak Frequency Compute  
 Energy/Performance Bias set to Balanced Power  
 Workload Profile set to Custom  
 Numa Group Size Optimization set to Flat  
 Sysinfo program /home/cpu2017\_u2/bin/sysinfo  
 Rev: r5974 of 2018-05-19 9bcde8f2999c33d61f64985e45859ea9  
 running on mll10-sles15 Wed Apr 24 09:06:21 2019

SUT (System Under Test) info as seen by some common utilities.  
 For more information on this section, see  
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) Bronze 3204 CPU @ 1.90GHz
 1 "physical id"s (chips)
 6 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 6
siblings  : 6
physical 0: cores 0 1 2 3 4 5
```

```
From lscpu:
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:             Little Endian
CPU(s):                 6
On-line CPU(s) list:   0-5
Thread(s) per core:    1
Core(s) per socket:    6
Socket(s):              1
NUMA node(s):          1
Vendor ID:              GenuineIntel
CPU family:             6
Model:                  85
Model name:             Intel(R) Xeon(R) Bronze 3204 CPU @ 1.90GHz
Stepping:               6
CPU MHz:                1900.000
BogoMIPS:               3800.00
Virtualization:        VT-x
L1d cache:              32K
L1i cache:              32K
L2 cache:               1024K
L3 cache:               8448K
NUMA node0 CPU(s):     0-5
```

(Continued on next page)



# SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant ML110 Gen10**

(1.90 GHz, Intel Xeon Bronze 3204)

SPECspeed2017\_fp\_base = 24.8

SPECspeed2017\_fp\_peak = Not Run

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Apr-2019

**Hardware Availability:** Apr-2019

**Software Availability:** Feb-2019

## Platform Notes (Continued)

Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp lm constant\_tsc art arch\_perfmon pebs bts rep\_good nopl xtopology nonstop\_tsc cpuid aperfperf tsc\_known\_freq pni pclmulqdq dtes64 monitor ds\_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4\_1 sse4\_2 x2apic movbe popcnt tsc\_deadline\_timer aes xsave avx f16c rdrand lahf\_lm abm 3dnowprefetch cpuid\_fault epb cat\_l3 cdp\_l3 invpcid\_single intel\_ppin mba tpr\_shadow vnmi flexpriority ept vpid fsgsbase tsc\_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm mpx rdt\_a avx512f avx512dq rdseed adx smap clflushopt clwb intel\_pt avx512cd avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm\_llc cqm\_occup\_llc cqm\_mbm\_total cqm\_mbm\_local ibpb ibrs stibp dtherm arat pln pts pku ospke avx512\_vnni arch\_capabilities ssbd

```
/proc/cpuinfo cache data
cache size : 8448 KB
```

```
From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.
```

```
available: 1 nodes (0)
node 0 cpus: 0 1 2 3 4 5
node 0 size: 96326 MB
node 0 free: 95835 MB
node distances:
node 0
0: 10
```

```
From /proc/meminfo
MemTotal: 98638088 kB
HugePages_Total: 0
Hugepagesize: 2048 kB
```

```
From /etc/*release* /etc/*version*
os-release:
NAME="SLES"
VERSION="15"
VERSION_ID="15"
PRETTY_NAME="SUSE Linux Enterprise Server 15"
ID="sles"
ID_LIKE="suse"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:15"
```

```
uname -a:
Linux ml110-sles15 4.12.14-23-default #1 SMP Tue May 29 21:04:44 UTC 2018 (cd0437b)
x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

(Continued on next page)



# SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant ML110 Gen10**

(1.90 GHz, Intel Xeon Bronze 3204)

SPECspeed2017\_fp\_base = 24.8

SPECspeed2017\_fp\_peak = Not Run

**CPU2017 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Apr-2019  
**Hardware Availability:** Apr-2019  
**Software Availability:** Feb-2019

## Platform Notes (Continued)

CVE-2017-5754 (Meltdown): Not affected  
CVE-2017-5753 (Spectre variant 1): Mitigation: \_\_user pointer sanitization  
CVE-2017-5715 (Spectre variant 2): Mitigation: Indirect Branch Restricted Speculation, IBPB, IBRS\_FW

run-level 3 Apr 24 09:03

SPEC is set to: /home/cpu2017\_u2

```
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda3        xfs   313G   31G  282G  10% /home
```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS HPE U33 02/02/2019

Memory:

6x UNKNOWN NOT AVAILABLE 16 GB 2 rank 2666, configured at 2133

(End of data from sysinfo program)

## Compiler Version Notes

=====  
CC 619.lbm\_s(base) 638.imagick\_s(base) 644.nab\_s(base)  
-----

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.2.187 Build 20190117  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.  
-----

=====  
FC 607.cactuBSSN\_s(base)  
-----

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.2.187 Build 20190117  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.  
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.2.187 Build 20190117  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.  
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)  
64, Version 19.0.2.187 Build 20190117  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.  
-----  
=====

(Continued on next page)



# SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant ML110 Gen10

(1.90 GHz, Intel Xeon Bronze 3204)

SPECspeed2017\_fp\_base = 24.8

SPECspeed2017\_fp\_peak = Not Run

**CPU2017 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Apr-2019  
**Hardware Availability:** Apr-2019  
**Software Availability:** Feb-2019

## Compiler Version Notes (Continued)

FC 603.bwaves\_s(base) 649.fotonik3d\_s(base) 654.roms\_s(base)

-----  
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R) 64, Version 19.0.2.187 Build 20190117  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.  
-----

=====  
CC 621.wrf\_s(base) 627.cam4\_s(base) 628.pop2\_s(base)

-----  
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R) 64, Version 19.0.2.187 Build 20190117  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.  
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64, Version 19.0.2.187 Build 20190117  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.  
-----

## Base Compiler Invocation

C benchmarks:

icc -m64 -std=c11

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

ifort -m64 icc -m64 -std=c11

Benchmarks using Fortran, C, and C++:

icpc -m64 icc -m64 -std=c11 ifort -m64

## Base Portability Flags

603.bwaves\_s: -DSPEC\_LP64  
607.cactuBSSN\_s: -DSPEC\_LP64  
619.lbm\_s: -DSPEC\_LP64  
621.wrf\_s: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG -convert big\_endian  
627.cam4\_s: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG  
628.pop2\_s: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG -convert big\_endian  
-assume byterecl  
638.imagick\_s: -DSPEC\_LP64  
644.nab\_s: -DSPEC\_LP64

(Continued on next page)



# SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant ML110 Gen10**

(1.90 GHz, Intel Xeon Bronze 3204)

SPECspeed2017\_fp\_base = 24.8

SPECspeed2017\_fp\_peak = Not Run

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Apr-2019

**Hardware Availability:** Apr-2019

**Software Availability:** Feb-2019

## Base Portability Flags (Continued)

649.fotonik3d\_s: -DSPEC\_LP64

654.roms\_s: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp -DSPEC_OPENMP
-qopt-prefetch-issue-excl-hint -ansi-alias -complex-limited-range
```

Fortran benchmarks:

```
-DSPEC_OPENMP -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp
-qopt-prefetch-issue-excl-hint -ansi-alias -complex-limited-range
-nostandard-realloc-lhs
```

Benchmarks using both Fortran and C:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp -DSPEC_OPENMP
-qopt-prefetch-issue-excl-hint -ansi-alias -complex-limited-range
-nostandard-realloc-lhs
```

Benchmarks using Fortran, C, and C++:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp -DSPEC_OPENMP
-qopt-prefetch-issue-excl-hint -ansi-alias -complex-limited-range
-nostandard-realloc-lhs
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-V1.2-CLX-revA.html>

<http://www.spec.org/cpu2017/flags/HPE-ic19.0u1-flags-linux64.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-V1.2-CLX-revA.xml>

<http://www.spec.org/cpu2017/flags/HPE-ic19.0u1-flags-linux64.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU2017 v1.0.5 on 2019-04-23 23:36:20-0400.

Report generated on 2019-06-11 17:12:39 by CPU2017 PDF formatter v6067.

Originally published on 2019-06-11.