



SPEC® CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Epsilon Sp. z o.o. Sp. Komandytowa

SPECrate2017_int_base = 81.5

eterio 210 RA1 (Intel Xeon Silver 4208, 2.10 GHz)

SPECrate2017_int_peak = 84.4

CPU2017 License: 9081


Test Date: Jul-2019

Test Sponsor: Epsilon Sp. z o.o. Sp. Komandytowa

Hardware Availability: Apr-2019

Tested by: Epsilon Sp. z o.o. Sp. Komandytowa

Software Availability: Nov-2018

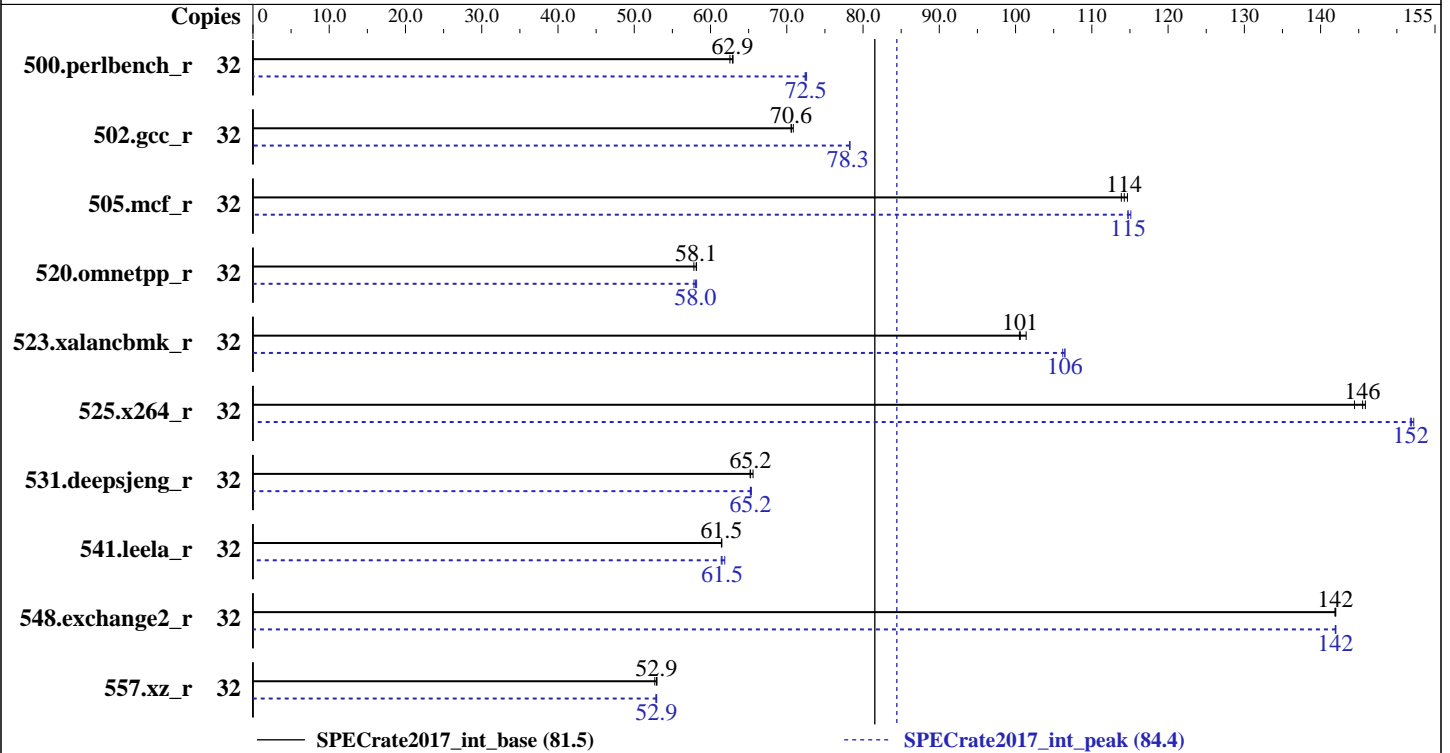

Hardware

CPU Name: Intel Xeon Silver 4208
 Max MHz.: 3200
 Nominal: 2100
 Enabled: 16 cores, 2 chips, 2 threads/core
 Orderable: 1,2 chips
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 11 MB I+D on chip per chip
 Other: None
 Memory: 768 GB (24 x 32 GB 2Rx4 PC4-2666V-R, running at 2400)
 Storage: 1 x 960 GB SSD SATA III
 Other: None

Software

OS: Red Hat Enterprise Linux Server release 7.4 (Maipo)
 3.10.0-693.21.1.el7.x86_64
 Compiler: C/C++: Version 19.0.1.144 of Intel C/C++ Compiler Build 20181018 for Linux;
 Fortran: Version 19.0.1.144 of Intel Fortran Compiler Build 20181018 for Linux
 Parallel: No
 Firmware: Version BIOS 02.01.0008 released Mar-2019
 File System: ext4
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit
 Other: jemalloc memory allocator V5.0.1



SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Epsilon Sp. z o.o. Sp. Komandytowa

SPECrate2017_int_base = 81.5

eterio 210 RA1 (Intel Xeon Silver 4208, 2.10 GHz)

SPECrate2017_int_peak = 84.4

CPU2017 License: 9081

Test Date: Jul-2019

Test Sponsor: Epsilon Sp. z o.o. Sp. Komandytowa

Hardware Availability: Apr-2019

Tested by: Epsilon Sp. z o.o. Sp. Komandytowa

Software Availability: Nov-2018

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	32	809	63.0	810	62.9	815	62.5	32	704	72.4	703	72.5	702	72.6
502.gcc_r	32	642	70.6	640	70.9	642	70.6	32	579	78.2	579	78.3	579	78.3
505.mcf_r	32	453	114	451	115	454	114	32	451	115	449	115	451	115
520.omnetpp_r	32	722	58.2	726	57.8	722	58.1	32	724	58.0	722	58.2	726	57.8
523.xalancbmk_r	32	333	101	336	101	336	101	32	317	106	317	106	318	106
525.x264_r	32	388	144	385	146	384	146	32	369	152	369	152	368	152
531.deepsjeng_r	32	559	65.6	562	65.2	563	65.2	32	562	65.2	561	65.4	562	65.2
541.leela_r	32	862	61.5	863	61.4	862	61.5	32	861	61.5	857	61.9	863	61.4
548.exchange2_r	32	591	142	590	142	591	142	32	591	142	591	142	590	142
557.xz_r	32	652	53.0	656	52.7	653	52.9	32	653	52.9	654	52.8	653	52.9

SPECrate2017_int_base = 81.5

SPECrate2017_int_peak = 84.4

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

General Notes

Environment variables set by runcpu before the start of the run:

LD_LIBRARY_PATH = "/cpu2017/lib/ia32:/cpu2017/lib/intel64:/cpu2017/je5.0.1-32:/cpu2017/je5.0.1-64"

Binaries compiled on a system with 1x Intel Core i9-7900X CPU + 32GB RAM memory using Redhat Enterprise Linux 7.5

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches
```

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Epsilon Sp. z o.o. Sp. Komandytowa

SPECrate2017_int_base = 81.5

eterio 210 RA1 (Intel Xeon Silver 4208, 2.10 GHz)

SPECrate2017_int_peak = 84.4

CPU2017 License: 9081

Test Date: Jul-2019

Test Sponsor: Epsilon Sp. z o.o. Sp. Komandytowa

Hardware Availability: Apr-2019

Tested by: Epsilon Sp. z o.o. Sp. Komandytowa

Software Availability: Nov-2018

General Notes (Continued)

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

jemalloc:
jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available via jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

BIOS Settings:

Intel(R) Hyper-Threading Tech = Enabled
CPU Power and Performance Policy = Performance
Intel(R) Turbo Boost Technology = Enabled
ClE = Disabled
Processor C6 = Disabled
IMC Interleaving = Auto
Sub_NUMA Cluster = Disabled
Set FAN Profile = Performance
Patrol Scrub = Disabled

Sysinfo program /cpu2017/bin/sysinfo
Rev: r5974 of 2018-05-19 9bcde8f2999c33d61f64985e45859ea9
running on SUT Wed Jul 17 20:37:36 2019

SUT (System Under Test) info as seen by some common utilities.
For more information on this section, see
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : Intel(R) Xeon(R) Silver 4208 CPU @ 2.10GHz
 2 "physical id"s (chips)
 32 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
  cpu cores : 8
  siblings  : 16
  physical 0: cores 0 1 2 3 4 5 6 7
  physical 1: cores 0 1 2 3 4 5 6 7
```

From lscpu:

```
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:            Little Endian
CPU(s):                32
```

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Epsilon Sp. z o.o. Sp. Komandytowa

SPECrate2017_int_base = 81.5

eterio 210 RA1 (Intel Xeon Silver 4208, 2.10 GHz)

SPECrate2017_int_peak = 84.4

CPU2017 License: 9081

Test Date: Jul-2019

Test Sponsor: Epsilon Sp. z o.o. Sp. Komandytowa

Hardware Availability: Apr-2019

Tested by: Epsilon Sp. z o.o. Sp. Komandytowa

Software Availability: Nov-2018

Platform Notes (Continued)

```

On-line CPU(s) list:    0-31
Thread(s) per core:    2
Core(s) per socket:    8
Socket(s):              2
NUMA node(s):          2
Vendor ID:              GenuineIntel
CPU family:             6
Model:                  85
Model name:             Intel(R) Xeon(R) Silver 4208 CPU @ 2.10GHz
Stepping:               7
CPU MHz:                2499.984
CPU max MHz:            3200.0000
CPU min MHz:            800.0000
BogoMIPS:               4200.00
Virtualization:         VT-x
L1d cache:              32K
L1i cache:              32K
L2 cache:               1024K
L3 cache:               11264K
NUMA node0 CPU(s):     0-7,16-23
NUMA node1 CPU(s):     8-15,24-31
Flags:                  fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc
aperfmpperf eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 fma
cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes
xsave avx f16c rdrand lahf_lm abm 3dnowprefetch epb cat_l3 cdp_l3 invpcid_single
intel_pt spec_ctrl ibpb_support tpr_shadow vnmi flexpriority ept vpid fsgsbase
tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm mpx rdt_a avx512f avx512dq
rdseed adx smap clflushopt clwb avx512cd avx512bw avx512vl xsaveopt xsavec xgetbv1
cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local dtherm ida arat pln pts hwp
hwp_act_window hwp_epp hwp_pkg_req

```

```

/proc/cpuinfo cache data
cache size : 11264 KB

```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```

available: 2 nodes (0-1)
node 0 cpus: 0 1 2 3 4 5 6 7 16 17 18 19 20 21 22 23
node 0 size: 391875 MB
node 0 free: 382679 MB
node 1 cpus: 8 9 10 11 12 13 14 15 24 25 26 27 28 29 30 31
node 1 size: 393216 MB
node 1 free: 384254 MB
node distances:
node  0  1

```

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Epsilon Sp. z o.o. Sp. Komandytowa

SPECrate2017_int_base = 81.5

eterio 210 RA1 (Intel Xeon Silver 4208, 2.10 GHz)

SPECrate2017_int_peak = 84.4

CPU2017 License: 9081

Test Date: Jul-2019

Test Sponsor: Epsilon Sp. z o.o. Sp. Komandytowa

Hardware Availability: Apr-2019

Tested by: Epsilon Sp. z o.o. Sp. Komandytowa

Software Availability: Nov-2018

Platform Notes (Continued)

```
0: 10 21
1: 21 10
```

From /proc/meminfo

```
MemTotal: 791013240 kB
HugePages_Total: 0
Hugepagesize: 2048 kB
```

From /etc/*release* /etc/*version*

```
os-release:
  NAME="Red Hat Enterprise Linux Server"
  VERSION="7.4 (Maipo)"
  ID="rhel"
  ID_LIKE="fedora"
  VARIANT="Server"
  VARIANT_ID="server"
  VERSION_ID="7.4"
  PRETTY_NAME="Red Hat Enterprise Linux"
redhat-release: Red Hat Enterprise Linux Server release 7.4 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.4 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.4:ga:server
```

uname -a:

```
Linux SUT 3.10.0-693.21.1.el7.x86_64 #1 SMP Fri Feb 23 18:54:16 UTC 2018 x86_64 x86_64
x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

```
CVE-2017-5754 (Meltdown): Mitigation: PTI
CVE-2017-5753 (Spectre variant 1): Mitigation: Load fences
CVE-2017-5715 (Spectre variant 2): Mitigation: IBRS (kernel)
```

run-level 3 Jul 17 20:35

SPEC is set to: /cpu2017

```
Filesystem Type Size Used Avail Use% Mounted on
/dev/sdal ext4 825G 128G 656G 17% /
```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS Intel Corporation SE5C620.86B.02.01.0008.031920191559 03/19/2019

Memory:

24x Samsung M393A4K40CB2-CTD 32 GB 2 rank 2666, configured at 2400

(End of data from sysinfo program)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Epsilon Sp. z o.o. Sp. Komandytowa

SPECrate2017_int_base = 81.5

eterio 210 RA1 (Intel Xeon Silver 4208, 2.10 GHz)

SPECrate2017_int_peak = 84.4

CPU2017 License: 9081

Test Sponsor: Epsilon Sp. z o.o. Sp. Komandytowa

Tested by: Epsilon Sp. z o.o. Sp. Komandytowa

Test Date: Jul-2019

Hardware Availability: Apr-2019

Software Availability: Nov-2018

Compiler Version Notes

=====
CC 502.gcc_r(peak)

Intel(R) C Intel(R) 64 Compiler for applications running on IA-32, Version
19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====
CC 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base, peak)
525.x264_r(base, peak) 557.xz_r(base, peak)

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====
CC 500.perlbench_r(peak)

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====
CXXC 523.xalanbmk_r(peak)

Intel(R) C++ Intel(R) 64 Compiler for applications running on IA-32, Version
19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====
CXXC 520.omnetpp_r(base, peak) 523.xalanbmk_r(base) 531.deepsjeng_r(base,
peak) 541.leela_r(base, peak)

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====
FC 548.exchange2_r(base, peak)

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
64, Version 19.0.1.144 Build 20181018

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Epsilon Sp. z o.o. Sp. Komandytowa

SPECrate2017_int_base = 81.5

eterio 210 RA1 (Intel Xeon Silver 4208, 2.10 GHz)

SPECrate2017_int_peak = 84.4

CPU2017 License: 9081

Test Date: Jul-2019

Test Sponsor: Epsilon Sp. z o.o. Sp. Komandytowa

Hardware Availability: Apr-2019

Tested by: Epsilon Sp. z o.o. Sp. Komandytowa

Software Availability: Nov-2018

Compiler Version Notes (Continued)

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

```
icc -m64 -std=c11
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Base Portability Flags

```
500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.1.144/linux/compiler/lib/intel64
-lqkmallo
```

C++ benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.1.144/linux/compiler/lib/intel64
-lqkmallo
```

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Epsilon Sp. z o.o. Sp. Komandytowa

SPECrate2017_int_base = 81.5

eterio 210 RA1 (Intel Xeon Silver 4208, 2.10 GHz)

SPECrate2017_int_peak = 84.4

CPU2017 License: 9081

Test Sponsor: Epsilon Sp. z o.o. Sp. Komandytowa

Tested by: Epsilon Sp. z o.o. Sp. Komandytowa

Test Date: Jul-2019

Hardware Availability: Apr-2019

Software Availability: Nov-2018

Base Optimization Flags (Continued)

Fortran benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs -align array32byte  
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.1.144/linux/compiler/lib/intel64  
-lqkmalloc
```

Peak Compiler Invocation

C benchmarks (except as noted below):

```
icc -m64 -std=c11
```

```
502.gcc_r: icc -m32 -std=c11 -L/usr/local/IntelCompiler19/compilers_and_libraries_2019.1.144/linux/compiler/lib/ia32_lin
```

C++ benchmarks (except as noted below):

```
icpc -m64
```

```
523.xalancbmk_r: icpc -m32 -L/usr/local/IntelCompiler19/compilers_and_libraries_2019.1.144/linux/compiler/lib/ia32_lin
```

Fortran benchmarks:

```
ifort -m64
```

Peak Portability Flags

```
500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64  
502.gcc_r: -D_FILE_OFFSET_BITS=64  
505.mcf_r: -DSPEC_LP64  
520.omnetpp_r: -DSPEC_LP64  
523.xalancbmk_r: -D_FILE_OFFSET_BITS=64 -DSPEC_LINUX  
525.x264_r: -DSPEC_LP64  
531.deepsjeng_r: -DSPEC_LP64  
541.leela_r: -DSPEC_LP64  
548.exchange2_r: -DSPEC_LP64  
557.xz_r: -DSPEC_LP64
```

Peak Optimization Flags

C benchmarks:

```
500.perlbench_r: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo  
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=4
```

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Epsilon Sp. z o.o. Sp. Komandytowa

SPECrate2017_int_base = 81.5

eterio 210 RA1 (Intel Xeon Silver 4208, 2.10 GHz)

SPECrate2017_int_peak = 84.4

CPU2017 License: 9081

Test Date: Jul-2019

Test Sponsor: Epsilon Sp. z o.o. Sp. Komandytowa

Hardware Availability: Apr-2019

Tested by: Epsilon Sp. z o.o. Sp. Komandytowa

Software Availability: Nov-2018

Peak Optimization Flags (Continued)

500.perlbench_r (continued):

```
-fno-strict-overflow  
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.1.144/linux/compiler/lib/intel64  
-lqkmalloc
```

```
502.gcc_r: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo  
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=4  
-L/usr/local/je5.0.1-32/lib -ljemalloc
```

```
505.mcf_r: -Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=4  
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.1.144/linux/compiler/lib/intel64  
-lqkmalloc
```

```
525.x264_r: -Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=4 -fno-alias  
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.1.144/linux/compiler/lib/intel64  
-lqkmalloc
```

557.xz_r: Same as 505.mcf_r

C++ benchmarks:

```
520.omnetpp_r: -Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=4  
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.1.144/linux/compiler/lib/intel64  
-lqkmalloc
```

```
523.xalancbmk_r: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo  
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=4  
-L/usr/local/je5.0.1-32/lib -ljemalloc
```

531.deepsjeng_r: Same as 520.omnetpp_r

541.leela_r: Same as 520.omnetpp_r

Fortran benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs -align array32byte  
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.1.144/linux/compiler/lib/intel64  
-lqkmalloc
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic19.0u1-official-linux64.2019-08-06.html>

<http://www.spec.org/cpu2017/flags/Epsilon-Platform-Flags-RevA-Feb-2018-For-Intel-Platform.html>



SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Epsilon Sp. z o.o. Sp. Komandytowa

SPECrate2017_int_base = 81.5

eterio 210 RA1 (Intel Xeon Silver 4208, 2.10 GHz)

SPECrate2017_int_peak = 84.4

CPU2017 License: 9081

Test Date: Jul-2019

Test Sponsor: Epsilon Sp. z o.o. Sp. Komandytowa

Hardware Availability: Apr-2019

Tested by: Epsilon Sp. z o.o. Sp. Komandytowa

Software Availability: Nov-2018

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic19.0ul-official-linux64.2019-08-06.xml>

<http://www.spec.org/cpu2017/flags/Epsilon-Platform-Flags-RevA-Feb-2018-For-Intel-Platform.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU2017 v1.0.5 on 2019-07-17 14:37:35-0400.

Report generated on 2019-08-06 17:56:31 by CPU2017 PDF formatter v6067.

Originally published on 2019-08-06.