



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Dell Inc.

SPECspeed®2017\_int\_base = 9.20

PowerEdge FC640 (Intel Xeon Gold 5222, 3.80GHz)

SPECspeed®2017\_int\_peak = 9.36

CPU2017 License: 55


Test Date: Aug-2019

Test Sponsor: Dell Inc.

Hardware Availability: Apr-2019

Tested by: Dell Inc.

Software Availability: Jul-2019

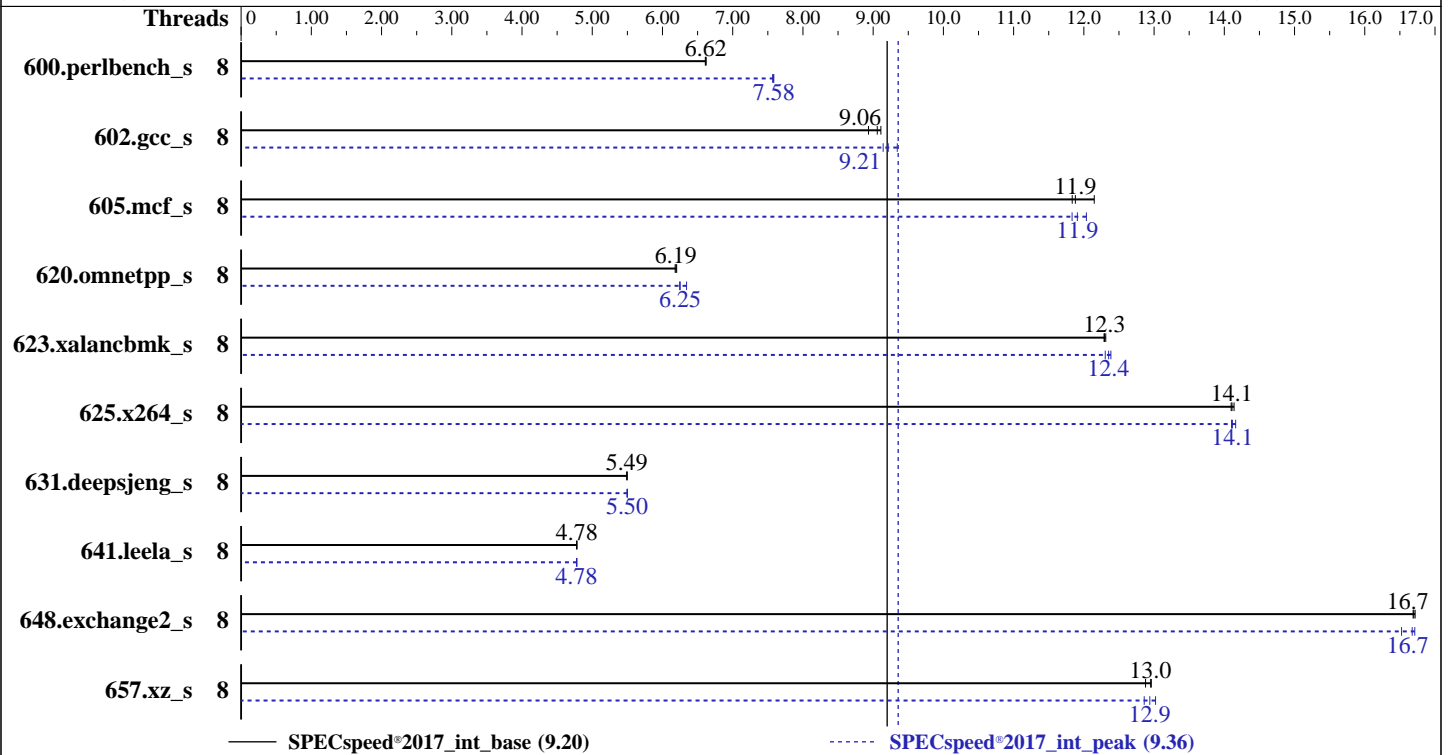

### Hardware

CPU Name: Intel Xeon Gold 5222  
 Max MHz: 3900  
 Nominal: 3800  
 Enabled: 8 cores, 2 chips  
 Orderable: 1,2 chips  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 16.5 MB I+D on chip per chip  
 Other: None  
 Memory: 384 GB (12 x 32 GB 2Rx8 PC4-2933Y-R)  
 Storage: 1 x 480 GB SATA SSD  
 Other: None

### Software

OS: Ubuntu 18.04.2 LTS  
 kernel 4.15.0-55-generic  
 Compiler: C/C++: Version 19.0.4.227 of Intel C/C++ Compiler Build 20190416 for Linux;  
 Fortran: Version 19.0.4.227 of Intel Fortran Compiler Build 20190416 for Linux  
 Parallel: Yes  
 Firmware: Version 2.2.11 released Jun-2019  
 File System: ext4  
 System State: Run level 5 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: None  
 jemalloc memory allocator V5.0.1  
 Power Management: --



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Dell Inc.

SPECspeed®2017\_int\_base = 9.20

PowerEdge FC640 (Intel Xeon Gold 5222, 3.80GHz)

SPECspeed®2017\_int\_peak = 9.36

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Aug-2019

Hardware Availability: Apr-2019

Software Availability: Jul-2019

## Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	8	268	6.62	269	6.61	<b>268</b>	<b>6.62</b>	8	<b>234</b>	<b>7.58</b>	235	7.57	234	7.58
602.gcc_s	8	<b>440</b>	<b>9.06</b>	446	8.93	437	9.11	8	<b>432</b>	<b>9.21</b>	426	9.34	436	9.14
605.mcf_s	8	399	11.8	<b>397</b>	<b>11.9</b>	389	12.1	8	<b>396</b>	<b>11.9</b>	392	12.0	399	11.8
620.omnetpp_s	8	264	6.18	<b>263</b>	<b>6.19</b>	263	6.20	8	<b>261</b>	<b>6.25</b>	261	6.24	257	6.34
623.xalancbmk_s	8	<b>115</b>	<b>12.3</b>	115	12.3	115	12.3	8	115	12.3	114	12.4	<b>115</b>	<b>12.4</b>
625.x264_s	8	125	14.1	125	14.1	<b>125</b>	<b>14.1</b>	8	<b>125</b>	<b>14.1</b>	125	14.2	125	14.1
631.deepsjeng_s	8	<b>261</b>	<b>5.49</b>	261	5.50	261	5.49	8	<b>261</b>	<b>5.50</b>	261	5.49	260	5.50
641.leela_s	8	<b>357</b>	<b>4.78</b>	357	4.78	357	4.78	8	357	4.78	357	4.78	<b>357</b>	<b>4.78</b>
648.exchange2_s	8	176	16.7	<b>176</b>	<b>16.7</b>	176	16.7	8	<b>176</b>	<b>16.7</b>	178	16.5	176	16.7
657.xz_s	8	<b>477</b>	<b>13.0</b>	477	13.0	480	12.9	8	475	13.0	<b>478</b>	<b>12.9</b>	481	12.9

SPECspeed®2017\_int\_base = 9.20

SPECspeed®2017\_int\_peak = 9.36

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## General Notes

Environment variables set by runcpu before the start of the run:

LD\_LIBRARY\_PATH = "/home/cpu2017/lib/intel64:/home/cpu2017/lib/ia32:/home/cpu2017/je5.0.1-32"

Binaries compiled on a system with 1x Intel Core i9-799X CPU + 32GB RAM memory using Redhat Enterprise Linux 7.5

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches
```

runcpu command invoked through numactl i.e.:

```
numactl --interleave=all runcpu <etc>
```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_int\_base = 9.20

PowerEdge FC640 (Intel Xeon Gold 5222, 3.80GHz)

SPECspeed®2017\_int\_peak = 9.36

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Aug-2019

Hardware Availability: Apr-2019

Software Availability: Jul-2019

## General Notes (Continued)

jemalloc, a general purpose malloc implementation  
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5  
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

## Platform Notes

BIOS settings:  
Virtualization Technology disabled  
System Profile set to Custom  
CPU Performance set to Maximum Performance  
C States set to Autonomous  
C1E disabled  
Uncore Frequency set to Dynamic  
Energy Efficiency Policy set to Performance  
Memory Patrol Scrub disabled  
Logical Processor disabled  
CPU Interconnect Bus Link Power Management enabled  
PCI ASPM L1 Link Power Management enabled  
Sysinfo program /home/cpu2017/bin/sysinfo  
Rev: r5974 of 2018-05-19 9bcde8f2999c33d61f64985e45859ea9  
running on intel-sut Thu Aug 8 17:13:03 2019

SUT (System Under Test) info as seen by some common utilities.  
For more information on this section, see  
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo  
model name : Intel(R) Xeon(R) Gold 5222 CPU @ 3.80GHz  
2 "physical id"s (chips)  
8 "processors"  
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)  
cpu cores : 4  
siblings : 4  
physical 0: cores 5 8 9 13  
physical 1: cores 2 5 8 13

From lscpu:  
Architecture: x86\_64  
CPU op-mode(s): 32-bit, 64-bit  
Byte Order: Little Endian  
CPU(s): 8  
On-line CPU(s) list: 0-7  
Thread(s) per core: 1  
Core(s) per socket: 4  
Socket(s): 2

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_int\_base = 9.20

PowerEdge FC640 (Intel Xeon Gold 5222, 3.80GHz)

SPECspeed®2017\_int\_peak = 9.36

CPU2017 License: 55  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: Aug-2019  
Hardware Availability: Apr-2019  
Software Availability: Jul-2019

## Platform Notes (Continued)

```

NUMA node(s):          2
Vendor ID:             GenuineIntel
CPU family:            6
Model:                 85
Model name:            Intel(R) Xeon(R) Gold 5222 CPU @ 3.80GHz
Stepping:              6
CPU MHz:                3169.820
BogoMIPS:              7600.00
Virtualization:        VT-x
L1d cache:             32K
L1i cache:             32K
L2 cache:              1024K
L3 cache:              16896K
NUMA node0 CPU(s):    0,2,4,6
NUMA node1 CPU(s):    1,3,5,7
Flags:                  fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
aperfmpperf pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt aes xsave avx f16c rdrand
lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cdp_l3 invpcid_single intel_ppin
ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi flexpriority ept vpid
fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm mpx rdt_a avx512f
avx512dq rdseed adx smap clflushopt clwb intel_pt avx512cd avx512bw avx512vl
xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
dtherm ida arat pln pts pku ospke avx512_vnni md_clear flush_lld arch_capabilities

```

```

/proc/cpuinfo cache data
cache size : 16896 KB

```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```

available: 2 nodes (0-1)
node 0 cpus: 0 2 4 6
node 0 size: 191894 MB
node 0 free: 191581 MB
node 1 cpus: 1 3 5 7
node 1 size: 193534 MB
node 1 free: 192985 MB
node distances:
node  0  1
  0:  10  21
  1:  21  10

```

```

From /proc/meminfo
MemTotal:          394679556 kB
HugePages_Total:      0

```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_int\_base = 9.20

PowerEdge FC640 (Intel Xeon Gold 5222, 3.80GHz)

SPECspeed®2017\_int\_peak = 9.36

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Aug-2019

Hardware Availability: Apr-2019

Software Availability: Jul-2019

## Platform Notes (Continued)

Hugepagesize: 2048 kB

```
/usr/bin/lsb_release -d
Ubuntu 18.04.2 LTS
```

```
From /etc/*release* /etc/*version*
debian_version: buster/sid
os-release:
  NAME="Ubuntu"
  VERSION="18.04.2 LTS (Bionic Beaver)"
  ID=ubuntu
  ID_LIKE=debian
  PRETTY_NAME="Ubuntu 18.04.2 LTS"
  VERSION_ID="18.04"
  HOME_URL="https://www.ubuntu.com/"
  SUPPORT_URL="https://help.ubuntu.com/"
```

```
uname -a:
Linux intel-sut 4.15.0-55-generic #60-Ubuntu SMP Tue Jul 2 18:22:20 UTC 2019 x86_64
x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

```
CVE-2017-5754 (Meltdown): Not affected
CVE-2017-5753 (Spectre variant 1): Mitigation: __user pointer sanitization
CVE-2017-5715 (Spectre variant 2): Mitigation: Enhanced IBRS, IBPB: conditional, RSB
filling
```

```
run-level 5 Aug 8 17:11
```

```
SPEC is set to: /home/cpu2017
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda2       ext4  439G   35G  382G   9% /
```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

```
BIOS Dell Inc. 2.2.11 06/14/2019
Memory:
3x 00AD00B300AD HMA84GR7CJR4N-WM 32 GB 2 rank 2933
9x 00AD063200AD HMA84GR7CJR4N-WM 32 GB 2 rank 2933
4x Not Specified Not Specified
```

(End of data from sysinfo program)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_int\_base = 9.20

PowerEdge FC640 (Intel Xeon Gold 5222, 3.80GHz)

SPECspeed®2017\_int\_peak = 9.36

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Aug-2019

Hardware Availability: Apr-2019

Software Availability: Jul-2019

## Compiler Version Notes

```

=====
C          | 600.perlbench_s(base, peak) 602.gcc_s(base, peak) 605.mcf_s(base,
          | peak) 625.x264_s(base, peak) 657.xz_s(base, peak)
=====

```

```

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
=====

```

```

=====
C++       | 620.omnetpp_s(base, peak) 623.xalancbmk_s(base, peak)
          | 631.deepsjeng_s(base, peak) 641.leela_s(base, peak)
=====

```

```

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
=====

```

```

=====
Fortran   | 648.exchange2_s(base, peak)
=====

```

```

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
64, Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
=====

```

## Base Compiler Invocation

C benchmarks:

icc -m64 -std=c11

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

## Base Portability Flags

600.perlbench\_s: -DSPEC\_LP64 -DSPEC\_LINUX\_X64

602.gcc\_s: -DSPEC\_LP64

605.mcf\_s: -DSPEC\_LP64

620.omnetpp\_s: -DSPEC\_LP64

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_int\_base = 9.20

PowerEdge FC640 (Intel Xeon Gold 5222, 3.80GHz)

SPECspeed®2017\_int\_peak = 9.36

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Aug-2019

Hardware Availability: Apr-2019

Software Availability: Jul-2019

## Base Portability Flags (Continued)

623.xalancbmk\_s: -DSPEC\_LP64 -DSPEC\_LINUX  
625.x264\_s: -DSPEC\_LP64  
631.deepsjeng\_s: -DSPEC\_LP64  
641.leela\_s: -DSPEC\_LP64  
648.exchange2\_s: -DSPEC\_LP64  
657.xz\_s: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=4 -qopenmp -DSPEC\_OPENMP  
-L/usr/local/je5.0.1-64/lib -ljemalloc

C++ benchmarks:

-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=4  
-L/usr/local/IntelCompiler19/compilers\_and\_libraries\_2019.4.227/linux/compiler/lib/intel64  
-lqkmalloc

Fortran benchmarks:

-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-mem-layout-trans=4  
-nostandard-realloc-lhs

## Peak Compiler Invocation

C benchmarks:

icc -m64 -std=c11

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

## Peak Portability Flags

Same as Base Portability Flags



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_int\_base = 9.20

PowerEdge FC640 (Intel Xeon Gold 5222, 3.80GHz)

SPECspeed®2017\_int\_peak = 9.36

CPU2017 License: 55  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: Aug-2019  
Hardware Availability: Apr-2019  
Software Availability: Jul-2019

## Peak Optimization Flags

C benchmarks:

```
600.perlbench_s: -w1,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -O2
-xCORE-AVX512 -qopt-mem-layout-trans=4 -ipo -O3
-no-prec-div -DSPEC_SUPPRESS_OPENMP -qopenmp
-DSPEC_OPENMP -fno-strict-overflow
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

```
602.gcc_s: -w1,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -O2
-xCORE-AVX512 -qopt-mem-layout-trans=4 -ipo -O3
-no-prec-div -DSPEC_SUPPRESS_OPENMP
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

```
605.mcf_s: -w1,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=4
-DSPEC_SUPPRESS_OPENMP -qopenmp -DSPEC_OPENMP
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

```
625.x264_s: -w1,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4 -qopenmp -DSPEC_OPENMP
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

```
657.xz_s: -w1,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -O2
-xCORE-AVX512 -qopt-mem-layout-trans=4 -ipo -O3
-no-prec-div -DSPEC_SUPPRESS_OPENMP -qopenmp
-DSPEC_OPENMP -L/usr/local/je5.0.1-64/lib -ljemalloc
```

C++ benchmarks:

```
620.omnetpp_s: -w1,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=4
-DSPEC_SUPPRESS_OPENMP
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64
-lqkmalloc
```

```
623.xalanbmk_s: -w1,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64
-lqkmalloc
```

631.deepsjeng\_s: Same as 623.xalanbmk\_s

641.leela\_s: Same as 623.xalanbmk\_s

Fortran benchmarks:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-mem-layout-trans=4
```

(Continued on next page)





# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_int\_base = 9.20

PowerEdge FC640 (Intel Xeon Gold 5222, 3.80GHz)

SPECspeed®2017\_int\_peak = 9.36

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Aug-2019

Hardware Availability: Apr-2019

Software Availability: Jul-2019

## Peak Optimization Flags (Continued)

Fortran benchmarks (continued):  
-nostandard-realloc-lhs

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic19.0u1-official-linux64.2019-07-09.html>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-revE7.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic19.0u1-official-linux64.2019-07-09.xml>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-revE7.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.0.5 on 2019-08-08 13:13:03-0400.

Report generated on 2019-12-11 10:47:41 by CPU2017 PDF formatter v6255.

Originally published on 2019-12-10.