



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C240 M5 (Intel Xeon Bronze 3206R, 1.90GHz)

SPECrate®2017\_fp\_base = 74.2

SPECrate®2017\_fp\_peak = 75.5

CPU2017 License: 9019


Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Feb-2020

Hardware Availability: Feb-2020

Software Availability: May-2019

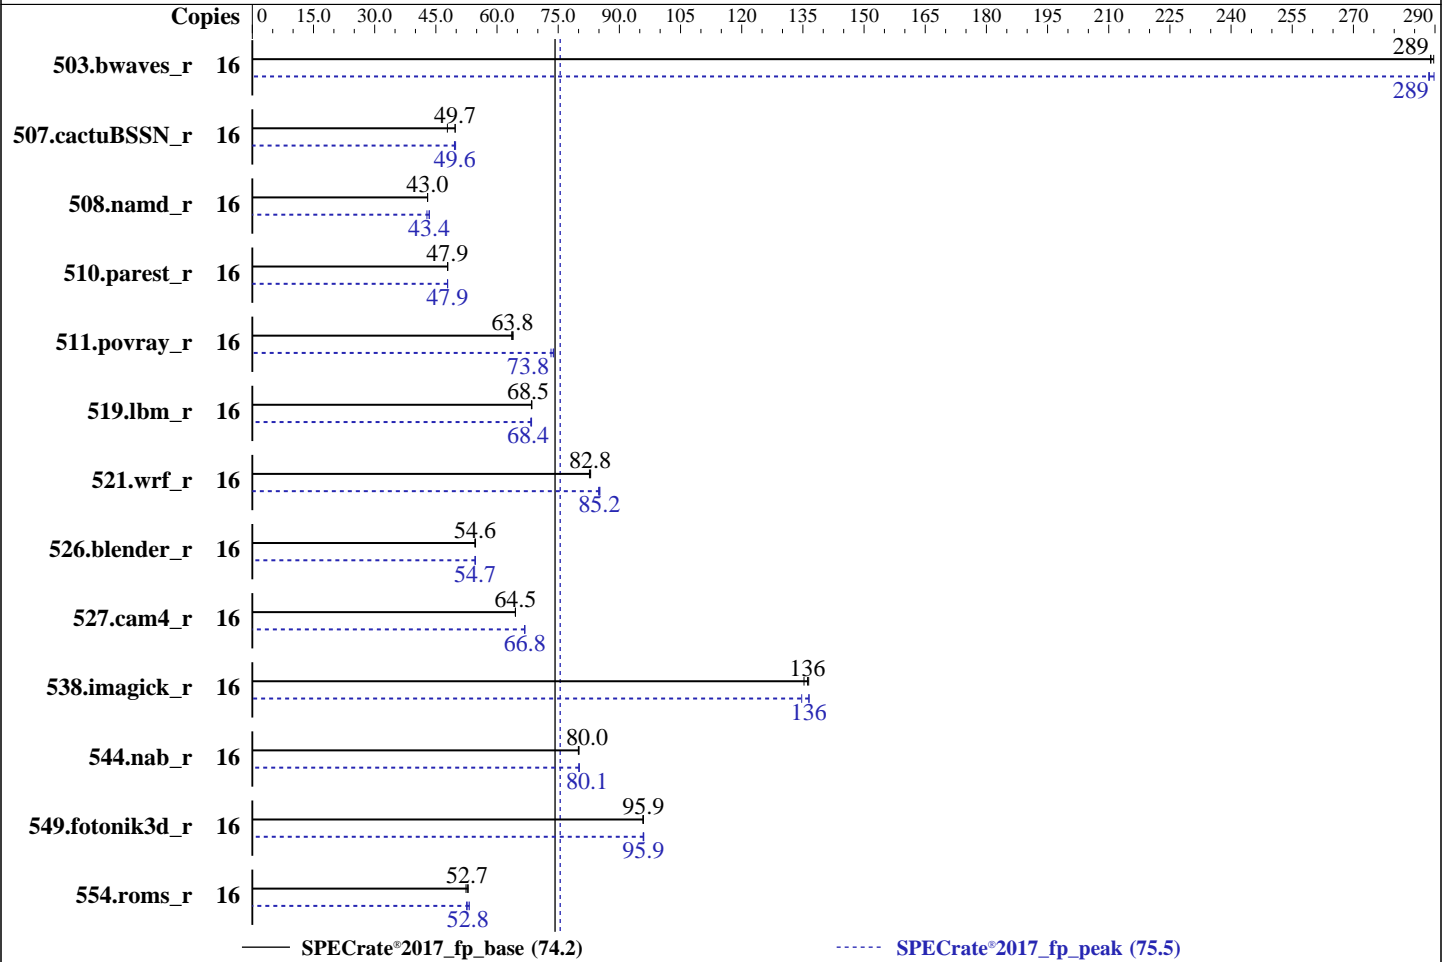

### Hardware

CPU Name: Intel Xeon Bronze 3206R  
 Max MHz: 1900  
 Nominal: 1900  
 Enabled: 16 cores, 2 chips  
 Orderable: 1,2 Chips  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 11 MB I+D on chip per chip  
 Other: None  
 Memory: 768 GB (24 x 32 GB 2Rx4 PC4-2933V-R, running at 2133)  
 Storage: 1 x 960 GB SSD SAS  
 Other: None

### Software

OS: SUSE Linux Enterprise Server 15 (x86\_64) 4.12.14-23-default  
 Compiler: C/C++: Version 19.0.4.227 of Intel C/C++ Compiler for Linux;  
 Fortran: Version 19.0.4.227 of Intel Fortran Compiler for Linux  
 Parallel: No  
 Firmware: Version 4.0.4j released Aug-2019  
 File System: btrfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: None  
 Power Management: BIOS set to prefer performance at the cost of additional power usage



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C240 M5 (Intel Xeon Bronze 3206R, 1.90GHz)

SPECrate®2017\_fp\_base = 74.2

SPECrate®2017\_fp\_peak = 75.5

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Feb-2020

Hardware Availability: Feb-2020

Software Availability: May-2019

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	16	555	289	<b>555</b>	<b>289</b>	554	290	16	556	288	554	290	<b>556</b>	<b>289</b>
507.cactuBSSN_r	16	<b>407</b>	<b>49.7</b>	423	47.8	407	49.7	16	409	49.6	406	49.8	<b>408</b>	<b>49.6</b>
508.namd_r	16	354	43.0	<b>354</b>	<b>43.0</b>	354	43.0	16	355	42.8	350	43.4	<b>351</b>	<b>43.4</b>
510.parest_r	16	873	47.9	<b>874</b>	<b>47.9</b>	875	47.9	16	874	47.9	875	47.9	<b>874</b>	<b>47.9</b>
511.povray_r	16	584	63.9	587	63.6	<b>586</b>	<b>63.8</b>	16	506	73.9	510	73.2	<b>506</b>	<b>73.8</b>
519.lbm_r	16	246	68.4	246	68.5	<b>246</b>	<b>68.5</b>	16	247	68.3	246	68.5	<b>247</b>	<b>68.4</b>
521.wrf_r	16	432	83.0	434	82.7	<b>433</b>	<b>82.8</b>	16	421	85.2	<b>421</b>	<b>85.2</b>	422	84.9
526.blender_r	16	445	54.7	446	54.6	<b>446</b>	<b>54.6</b>	16	<b>446</b>	<b>54.7</b>	446	54.6	446	54.7
527.cam4_r	16	<b>434</b>	<b>64.5</b>	434	64.5	434	64.5	16	<b>419</b>	<b>66.8</b>	419	66.8	419	66.7
538.imagick_r	16	294	135	<b>292</b>	<b>136</b>	292	136	16	<b>292</b>	<b>136</b>	291	137	295	135
544.nab_r	16	336	80.1	337	79.9	<b>336</b>	<b>80.0</b>	16	<b>336</b>	<b>80.1</b>	336	80.1	336	80.2
549.fotonik3d_r	16	650	95.9	<b>650</b>	<b>95.9</b>	651	95.8	16	651	95.8	<b>650</b>	<b>95.9</b>	650	96.0
554.roms_r	16	485	52.4	480	52.9	<b>482</b>	<b>52.7</b>	16	484	52.5	<b>481</b>	<b>52.8</b>	478	53.2

SPECrate®2017\_fp\_base = 74.2

SPECrate®2017\_fp\_peak = 75.5

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

LD\_LIBRARY\_PATH = "/home/cpu2017/lib/intel64"

## General Notes

Binaries compiled on a system with 1x Intel Core i9-7900X CPU + 32GB RAM memory using Redhat Enterprise Linux 7.5

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

sync; echo 3> /proc/sys/vm/drop\_caches

runcpu command invoked through numactl i.e.:

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C240 M5 (Intel Xeon Bronze 3206R, 1.90GHz)

SPECrate®2017\_fp\_base = 74.2

SPECrate®2017\_fp\_peak = 75.5

**CPU2017 License:** 9019

**Test Sponsor:** Cisco Systems

**Tested by:** Cisco Systems

**Test Date:** Feb-2020

**Hardware Availability:** Feb-2020

**Software Availability:** May-2019

### General Notes (Continued)

numactl --interleave=all runcpu <etc>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

### Platform Notes

BIOS Settings:

SNC set to Enabled

IMC Interleaving set to 1-way Interleave

Patrol Scrub set to Disabled

Sysinfo program /home/cpu2017/bin/sysinfo

Rev: r6365 of 2019-08-21 295195f888a3d7edble6e46a485a0011

running on linux-dit3 Mon Feb 24 04:32:30 2020

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) Bronze 3206R CPU @ 1.90GHz

2 "physical id"s (chips)

16 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 8

siblings : 8

physical 0: cores 0 1 2 3 4 5 6 7

physical 1: cores 0 1 2 3 4 5 6 7

From lscpu:

Architecture: x86\_64

CPU op-mode(s): 32-bit, 64-bit

Byte Order: Little Endian

CPU(s): 16

On-line CPU(s) list: 0-15

Thread(s) per core: 1

Core(s) per socket: 8

Socket(s): 2

NUMA node(s): 2

Vendor ID: GenuineIntel

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C240 M5 (Intel Xeon Bronze 3206R, 1.90GHz)

SPECrate®2017\_fp\_base = 74.2

SPECrate®2017\_fp\_peak = 75.5

**CPU2017 License:** 9019

**Test Sponsor:** Cisco Systems

**Tested by:** Cisco Systems

**Test Date:** Feb-2020

**Hardware Availability:** Feb-2020

**Software Availability:** May-2019

### Platform Notes (Continued)

```

CPU family:          6
Model:              85
Model name:         Intel(R) Xeon(R) Bronze 3206R CPU @ 1.90GHz
Stepping:          7
CPU MHz:            1900.000
CPU max MHz:        1900.0000
CPU min MHz:        1000.0000
BogoMIPS:           3800.00
Virtualization:     VT-x
L1d cache:          32K
L1i cache:          32K
L2 cache:           1024K
L3 cache:           11264K
NUMA node0 CPU(s): 0-7
NUMA node1 CPU(s): 8-15
Flags:              fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
aperfmpperf tsc_known_freq pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3
sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt
tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault
epb cat_l3 cdp_l3 invpcid_single intel_pspin mba tpr_shadow vnmi flexpriority ept
vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm mpx rdt_a
avx512f avx512dq rdseed adx smap clflushopt clwb intel_pt avx512cd avx512bw avx512vl
xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
ibpb ibrs stibp dtherm arat pln pts hwp hwp_act_window hwp_epp hwp_pkg_req pku ospke
avx512_vnni arch_capabilities ssbd

```

```

/proc/cpuinfo cache data
cache size : 11264 KB

```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```

available: 2 nodes (0-1)
node 0 cpus: 0 1 2 3 4 5 6 7
node 0 size: 385606 MB
node 0 free: 376755 MB
node 1 cpus: 8 9 10 11 12 13 14 15
node 1 size: 387058 MB
node 1 free: 381886 MB
node distances:
node  0  1
 0:  10  21
 1:  21  10

```

```

From /proc/meminfo
MemTotal:      791209240 kB

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C240 M5 (Intel Xeon Bronze 3206R, 1.90GHz)

SPECrate®2017\_fp\_base = 74.2

SPECrate®2017\_fp\_peak = 75.5

**CPU2017 License:** 9019  
**Test Sponsor:** Cisco Systems  
**Tested by:** Cisco Systems

**Test Date:** Feb-2020  
**Hardware Availability:** Feb-2020  
**Software Availability:** May-2019

### Platform Notes (Continued)

HugePages\_Total: 0  
Hugepagesize: 2048 kB

From /etc/\*release\* /etc/\*version\*  
os-release:

```
NAME="SLES"
VERSION="15"
VERSION_ID="15"
PRETTY_NAME="SUSE Linux Enterprise Server 15"
ID="sles"
ID_LIKE="suse"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:15"
```

uname -a:

```
Linux linux-dit3 4.12.14-23-default #1 SMP Tue May 29 21:04:44 UTC 2018 (cd0437b)
x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

```
CVE-2018-3620 (L1 Terminal Fault): No status reported
Microarchitectural Data Sampling: No status reported
CVE-2017-5754 (Meltdown): Not affected
CVE-2018-3639 (Speculative Store Bypass): Mitigation: Speculative Store Bypass disabled
via prctl and seccomp
CVE-2017-5753 (Spectre variant 1): Mitigation: __user pointer sanitization
CVE-2017-5715 (Spectre variant 2): Mitigation: Indirect Branch Restricted
Speculation, IBPB, IBRS_FW
```

run-level 3 Feb 23 20:48

SPEC is set to: /home/cpu2017

```
Filesystem Type Size Used Avail Use% Mounted on
/dev/sda1 btrfs 894G 21G 872G 3% /home
```

From /sys/devices/virtual/dmi/id

```
BIOS: Cisco Systems, Inc. C240M5.4.0.4j.0.0831191216 08/31/2019
Vendor: Cisco Systems Inc
Product: UCSC-C240-M5L
Serial: WZP223909M5
```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

```
24x 0xCE00 M393A4K40CB2-CVF 32 GB 2 rank 2933, configured at 2133
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C240 M5 (Intel Xeon Bronze 3206R, 1.90GHz)

SPECrate®2017\_fp\_base = 74.2

SPECrate®2017\_fp\_peak = 75.5

**CPU2017 License:** 9019  
**Test Sponsor:** Cisco Systems  
**Tested by:** Cisco Systems

**Test Date:** Feb-2020  
**Hardware Availability:** Feb-2020  
**Software Availability:** May-2019

### Platform Notes (Continued)

(End of data from sysinfo program)

### Compiler Version Notes

=====  
C | 519.lbm\_r(base, peak) 538.imagick\_r(base, peak)  
544.nab\_r(base, peak)

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.4.227 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.  
-----

=====  
C++ | 508.namd\_r(base, peak) 510.parest\_r(base, peak)  
-----

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.4.227 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.  
-----

=====  
C++, C | 511.povray\_r(base, peak) 526.blender\_r(base, peak)  
-----

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.4.227 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.  
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.4.227 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.  
-----

=====  
C++, C, Fortran | 507.cactuBSSN\_r(base, peak)  
-----

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.4.227 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.  
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.4.227 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.  
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)  
64, Version 19.0.4.227 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.  
-----

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C240 M5 (Intel Xeon Bronze 3206R, 1.90GHz)

SPECrate®2017\_fp\_base = 74.2

SPECrate®2017\_fp\_peak = 75.5

**CPU2017 License:** 9019

**Test Sponsor:** Cisco Systems

**Tested by:** Cisco Systems

**Test Date:** Feb-2020

**Hardware Availability:** Feb-2020

**Software Availability:** May-2019

## Compiler Version Notes (Continued)

```
=====
Fortran          | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak)
                  | 554.roms_r(base, peak)
=====
```

```
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
64, Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
=====
```

```
=====
Fortran, C       | 521.wrf_r(base, peak) 527.cam4_r(base, peak)
=====
```

```
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
64, Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
=====
```

## Base Compiler Invocation

C benchmarks:

```
icc -m64 -std=c11
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
ifort -m64 icc -m64 -std=c11
```

Benchmarks using both C and C++:

```
icpc -m64 icc -m64 -std=c11
```

Benchmarks using Fortran, C, and C++:

```
icpc -m64 icc -m64 -std=c11 ifort -m64
```



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C240 M5 (Intel Xeon Bronze 3206R, 1.90GHz)

SPECrate®2017\_fp\_base = 74.2

SPECrate®2017\_fp\_peak = 75.5

**CPU2017 License:** 9019

**Test Sponsor:** Cisco Systems

**Tested by:** Cisco Systems

**Test Date:** Feb-2020

**Hardware Availability:** Feb-2020

**Software Availability:** May-2019

## Base Portability Flags

```
503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64
```

## Base Optimization Flags

C benchmarks:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4
```

C++ benchmarks:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4
```

Fortran benchmarks:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4 -auto
-nostandard-realloc-lhs -align array32byte
```

Benchmarks using both Fortran and C:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4 -auto
-nostandard-realloc-lhs -align array32byte
```

Benchmarks using both C and C++:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4
```

Benchmarks using Fortran, C, and C++:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4 -auto
-nostandard-realloc-lhs -align array32byte
```





# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C240 M5 (Intel Xeon Bronze 3206R, 1.90GHz)

SPECrate®2017\_fp\_base = 74.2

SPECrate®2017\_fp\_peak = 75.5

**CPU2017 License:** 9019

**Test Sponsor:** Cisco Systems

**Tested by:** Cisco Systems

**Test Date:** Feb-2020

**Hardware Availability:** Feb-2020

**Software Availability:** May-2019

## Peak Compiler Invocation

C benchmarks:

```
icc -m64 -std=c11
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
ifort -m64 icc -m64 -std=c11
```

Benchmarks using both C and C++:

```
icpc -m64 icc -m64 -std=c11
```

Benchmarks using Fortran, C, and C++:

```
icpc -m64 icc -m64 -std=c11 ifort -m64
```

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

```
519.lbm_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX512
-O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=4
```

```
538.imagick_r: -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4
```

544.nab\_r: Same as 538.imagick\_r

C++ benchmarks:

```
508.namd_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX512
-O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=4
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C240 M5 (Intel Xeon Bronze 3206R, 1.90GHz)

SPECrate®2017\_fp\_base = 74.2

SPECrate®2017\_fp\_peak = 75.5

**CPU2017 License:** 9019

**Test Sponsor:** Cisco Systems

**Tested by:** Cisco Systems

**Test Date:** Feb-2020

**Hardware Availability:** Feb-2020

**Software Availability:** May-2019

## Peak Optimization Flags (Continued)

```
510.parest_r: -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4
```

Fortran benchmarks:

```
503.bwaves_r: -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4 -auto
-nostandard-realloc-lhs -align array32byte
```

549.fotonik3d\_r: Same as 503.bwaves\_r

```
554.roms_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX512
-O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=4 -auto -nostandard-realloc-lhs
-align array32byte
```

Benchmarks using both Fortran and C:

```
-prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX512 -O3
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=4 -auto -nostandard-realloc-lhs
-align array32byte
```

Benchmarks using both C and C++:

```
511.povray_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX512
-O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=4
```

```
526.blender_r: -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4
```

Benchmarks using Fortran, C, and C++:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4 -auto
-nostandard-realloc-lhs -align array32byte
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic19.0u1-official-linux64.2019-07-09.html>

<http://www.spec.org/cpu2017/flags/Cisco-Platform-Settings-V1.2-revJ.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic19.0u1-official-linux64.2019-07-09.xml>

<http://www.spec.org/cpu2017/flags/Cisco-Platform-Settings-V1.2-revJ.xml>



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C240 M5 (Intel Xeon Bronze 3206R,  
1.90GHz)

SPECrate®2017\_fp\_base = 74.2

SPECrate®2017\_fp\_peak = 75.5

**CPU2017 License:** 9019

**Test Sponsor:** Cisco Systems

**Tested by:** Cisco Systems

**Test Date:** Feb-2020

**Hardware Availability:** Feb-2020

**Software Availability:** May-2019

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.0 on 2020-02-24 04:32:28-0500.

Report generated on 2020-03-17 16:22:41 by CPU2017 PDF formatter v6255.

Originally published on 2020-03-17.