



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY RX2540 M5, Intel Xeon Gold 6246R,  
3.40 GHz

SPECrate®2017\_fp\_base = 229

SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 19


Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Feb-2020

Hardware Availability: Feb-2020

Software Availability: May-2019

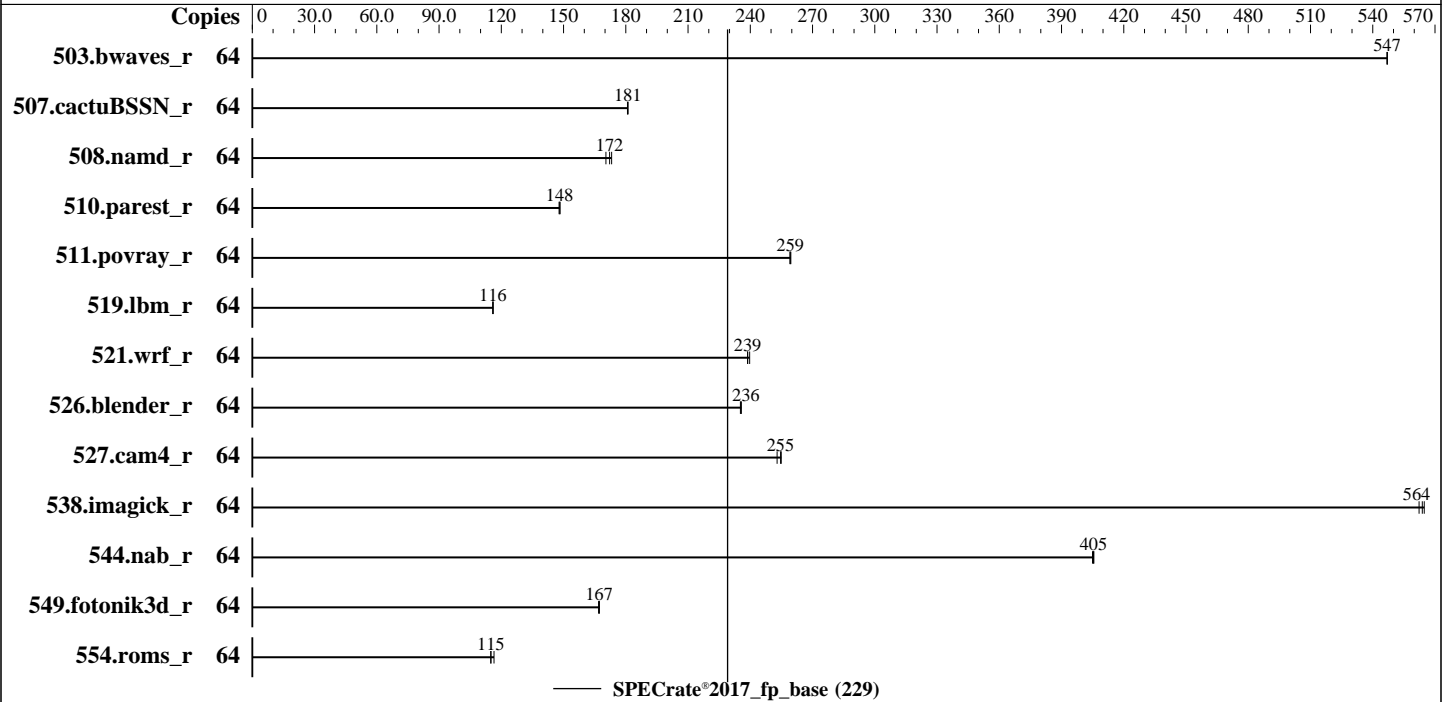

### Hardware

CPU Name: Intel Xeon Gold 6246R  
 Max MHz: 4100  
 Nominal: 3400  
 Enabled: 32 cores, 2 chips, 2 threads/core  
 Orderable: 1,2 chips  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 35.75 MB I+D on chip per chip  
 Other: None  
 Memory: 768 GB (24 x 32 GB 2Rx4 PC4-2933Y-R)  
 Storage: 1 x SATA M.2 SSD, 240 GB  
 Other: None

### Software

OS: SUSE Linux Enterprise Server 15  
 4.12.14-25.28-default  
 Compiler: C/C++: Version 19.0.4.227 of Intel C/C++  
 Compiler Build 20190416 for Linux;  
 Fortran: Version 19.0.4.227 of Intel Fortran  
 Compiler Build 20190416 for Linux  
 Parallel: No  
 Firmware: Fujitsu BIOS Version V5.0.0.14 R1.18.0 for D3384-B1x  
 released Feb-2020  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: Not Applicable  
 Other: None  
 Power Management: BIOS set to prefer performance at the cost of additional power usage



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY RX2540 M5, Intel Xeon Gold 6246R,  
3.40 GHz

SPECrate®2017\_fp\_base = 229

SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 19  
Test Sponsor: Fujitsu  
Tested by: Fujitsu

Test Date: Feb-2020  
Hardware Availability: Feb-2020  
Software Availability: May-2019

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	64	<b><u>1173</u></b>	<b><u>547</u></b>	1173	547	1173	547							
507.cactuBSSN_r	64	448	181	448	181	<b><u>448</u></b>	<b><u>181</u></b>							
508.namd_r	64	351	173	<b><u>353</u></b>	<b><u>172</u></b>	357	170							
510.parest_r	64	1129	148	1132	148	<b><u>1130</u></b>	<b><u>148</u></b>							
511.povray_r	64	<b><u>576</u></b>	<b><u>259</u></b>	577	259	576	260							
519.lbm_r	64	582	116	<b><u>582</u></b>	<b><u>116</u></b>	581	116							
521.wrf_r	64	<b><u>600</u></b>	<b><u>239</u></b>	598	240	601	239							
526.blender_r	64	414	235	414	236	<b><u>414</u></b>	<b><u>236</u></b>							
527.cam4_r	64	443	253	439	255	<b><u>440</u></b>	<b><u>255</u></b>							
538.imagick_r	64	282	565	283	562	<b><u>282</u></b>	<b><u>564</u></b>							
544.nab_r	64	266	406	<b><u>266</u></b>	<b><u>405</u></b>	266	405							
549.fotonik3d_r	64	1491	167	<b><u>1492</u></b>	<b><u>167</u></b>	1494	167							
554.roms_r	64	<b><u>884</u></b>	<b><u>115</u></b>	885	115	873	116							

SPECrate®2017\_fp\_base = 229

SPECrate®2017\_fp\_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"  
Kernel Boot Parameter set with : nohz\_full=1-63  
Process tuning settings:  
echo 10000000 > /proc/sys/kernel/sched\_min\_granularity\_ns

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
LD\_LIBRARY\_PATH = "/home/Benchmark/speccpu2017-1.1.0/lib/intel64"

## General Notes

Environment variables set by runcpu before the start of the run:  
LD\_LIBRARY\_PATH = "/home/Benchmark/SPECCPU2017-1.1.0/lib/intel64"

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY RX2540 M5, Intel Xeon Gold 6246R,  
3.40 GHz

SPECrate®2017\_fp\_base = 229

SPECrate®2017\_fp\_peak = Not Run

**CPU2017 License:** 19  
**Test Sponsor:** Fujitsu  
**Tested by:** Fujitsu

**Test Date:** Feb-2020  
**Hardware Availability:** Feb-2020  
**Software Availability:** May-2019

### General Notes (Continued)

Binaries compiled on a system with 1x Intel Core i9-7900X CPU + 32GB RAM  
memory using Redhat Enterprise Linux 7.5

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches
```

runcpu command invoked through numactl i.e.:

```
numactl --interleave=all runcpu <etc>
```

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

### Platform Notes

BIOS configuration:

Patrol Scrub = Disabled

WR CRC feature Control = Disabled

Fan Control = Full

Sysinfo program /home/Benchmark/speccpu2017-1.1.0/bin/sysinfo

Rev: r6365 of 2019-08-21 295195f888a3d7edble6e46a485a0011

running on RX2540M5\_CLXR Thu Feb 27 18:16:41 2020

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : Intel(R) Xeon(R) Gold 6246R CPU @ 3.40GHz
```

```
2 "physical id"s (chips)
```

```
64 "processors"
```

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

```
cpu cores : 16
```

```
siblings : 32
```

```
physical 0: cores 0 1 2 3 4 5 6 12 13 16 17 18 19 21 24 28
```

```
physical 1: cores 0 1 2 6 12 13 16 17 18 19 20 21 25 26 27 29
```

From lscpu:

Architecture: x86\_64

CPU op-mode(s): 32-bit, 64-bit

Byte Order: Little Endian

CPU(s): 64

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY RX2540 M5, Intel Xeon Gold 6246R,  
3.40 GHz

SPECrate®2017\_fp\_base = 229

SPECrate®2017\_fp\_peak = Not Run

**CPU2017 License:** 19  
**Test Sponsor:** Fujitsu  
**Tested by:** Fujitsu

**Test Date:** Feb-2020  
**Hardware Availability:** Feb-2020  
**Software Availability:** May-2019

### Platform Notes (Continued)

```

On-line CPU(s) list: 0-63
Thread(s) per core: 2
Core(s) per socket: 16
Socket(s): 2
NUMA node(s): 4
Vendor ID: GenuineIntel
CPU family: 6
Model: 85
Model name: Intel(R) Xeon(R) Gold 6246R CPU @ 3.40GHz
Stepping: 7
CPU MHz: 3400.000
CPU max MHz: 4100.0000
CPU min MHz: 1200.0000
BogoMIPS: 6800.00
Virtualization: VT-x
L1d cache: 32K
L1i cache: 32K
L2 cache: 1024K
L3 cache: 36608K
NUMA node0 CPU(s): 0-3,9-11,14,32-35,41-43,46
NUMA node1 CPU(s): 4-8,12,13,15,36-40,44,45,47
NUMA node2 CPU(s): 16-18,22-24,28,29,48-50,54-56,60,61
NUMA node3 CPU(s): 19-21,25-27,30,31,51-53,57-59,62,63
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
aperfmpperf pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave
avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cdp_l3
invpcid_single intel_ppin ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi
flexpriority ept vpid fsgsbase tsc_adjust bmil hle avx2 smep bmi2 erms invpcid rtm
cqm mpx rdt_a avx512f avx512dq rdseed adx smap clflushopt clwb intel_pt avx512cd
avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
cqm_mbm_local dtherm ida arat pln pts hwp hwp_act_window hwp_epp hwp_pkg_req pku
ospke avx512_vnni flush_l1d arch_capabilities

```

```

/proc/cpuinfo cache data
cache size : 36608 KB

```

```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a
physical chip.
available: 4 nodes (0-3)
node 0 cpus: 0 1 2 3 9 10 11 14 32 33 34 35 41 42 43 46
node 0 size: 191946 MB
node 0 free: 191601 MB
node 1 cpus: 4 5 6 7 8 12 13 15 36 37 38 39 40 44 45 47
node 1 size: 193532 MB

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY RX2540 M5, Intel Xeon Gold 6246R,  
3.40 GHz

SPECrate®2017\_fp\_base = 229

SPECrate®2017\_fp\_peak = Not Run

**CPU2017 License:** 19  
**Test Sponsor:** Fujitsu  
**Tested by:** Fujitsu

**Test Date:** Feb-2020  
**Hardware Availability:** Feb-2020  
**Software Availability:** May-2019

### Platform Notes (Continued)

```

node 1 free: 193280 MB
node 2 cpus: 16 17 18 22 23 24 28 29 48 49 50 54 55 56 60 61
node 2 size: 193532 MB
node 2 free: 193229 MB
node 3 cpus: 19 20 21 25 26 27 30 31 51 52 53 57 58 59 62 63
node 3 size: 193320 MB
node 3 free: 192967 MB
node distances:
node  0  1  2  3
  0:  10  11  21  21
  1:  11  10  21  21
  2:  21  21  10  11
  3:  21  21  11  10

```

```

From /proc/meminfo
MemTotal:          790869364 kB
HugePages_Total:    0
Hugepagesize:      2048 kB

```

```

From /etc/*release* /etc/*version*
os-release:
NAME="SLES"
VERSION="15"
VERSION_ID="15"
PRETTY_NAME="SUSE Linux Enterprise Server 15"
ID="sles"
ID_LIKE="suse"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:15"

```

```

uname -a:
Linux RX2540M5_CLXR 4.12.14-25.28-default #1 SMP Wed Jan 16 20:00:47 UTC 2019
(dd6077c) x86_64 x86_64 x86_64 GNU/Linux

```

Kernel self-reported vulnerability status:

```

CVE-2018-3620 (L1 Terminal Fault):          Not affected
Microarchitectural Data Sampling:          No status reported
CVE-2017-5754 (Meltdown):                  Not affected
CVE-2018-3639 (Speculative Store Bypass):  Mitigation: Speculative Store Bypass disabled
                                              via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):         Mitigation: __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):         Mitigation: Enhanced IBRS, IBPB: conditional,
                                              RSB filling

```

run-level 3 Feb 27 18:14

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY RX2540 M5, Intel Xeon Gold 6246R,  
3.40 GHz

SPECrate®2017\_fp\_base = 229

SPECrate®2017\_fp\_peak = Not Run

**CPU2017 License:** 19  
**Test Sponsor:** Fujitsu  
**Tested by:** Fujitsu

**Test Date:** Feb-2020  
**Hardware Availability:** Feb-2020  
**Software Availability:** May-2019

### Platform Notes (Continued)

SPEC is set to: /home/Benchmark/speccpu2017-1.1.0

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda5	xfs	191G	113G	79G	60%	/home

From /sys/devices/virtual/dmi/id

BIOS: FUJITSU // American Megatrends Inc. V5.0.0.14 R1.18.0 for D3384-Blx  
02/10/2020

Vendor: FUJITSU  
Product: PRIMERGY RX2540 M5  
Product Family: SERVER  
Serial: YMSQXXXXXX

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

24x Samsung M393A4K40CB2-CVF 32 GB 2 rank 2933, configured at 2934

(End of data from sysinfo program)

### Compiler Version Notes

=====  
C | 519.lbm\_r(base) 538.imagick\_r(base) 544.nab\_r(base)  
=====

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.4.227 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.  
=====

=====  
C++ | 508.namd\_r(base) 510.parest\_r(base)  
=====

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.4.227 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.  
=====

=====  
C++, C | 511.povray\_r(base) 526.blender\_r(base)  
=====

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.4.227 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.  
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
=====

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY RX2540 M5, Intel Xeon Gold 6246R,  
3.40 GHz

SPECrate®2017\_fp\_base = 229

SPECrate®2017\_fp\_peak = Not Run

**CPU2017 License:** 19  
**Test Sponsor:** Fujitsu  
**Tested by:** Fujitsu

**Test Date:** Feb-2020  
**Hardware Availability:** Feb-2020  
**Software Availability:** May-2019

### Compiler Version Notes (Continued)

Version 19.0.4.227 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====  
C++, C, Fortran | 507.cactuBSSN\_r(base)

-----  
Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.4.227 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.  
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.4.227 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.  
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)  
64, Version 19.0.4.227 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====  
Fortran | 503.bwaves\_r(base) 549.fotonik3d\_r(base) 554.roms\_r(base)

-----  
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)  
64, Version 19.0.4.227 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====  
Fortran, C | 521.wrf\_r(base) 527.cam4\_r(base)

-----  
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)  
64, Version 19.0.4.227 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.  
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.4.227 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

### Base Compiler Invocation

C benchmarks:  
icc -m64 -std=c11

C++ benchmarks:  
icpc -m64

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

**Fujitsu**

PRIMERGY RX2540 M5, Intel Xeon Gold 6246R,  
3.40 GHz

SPECrate®2017\_fp\_base = 229

SPECrate®2017\_fp\_peak = Not Run

**CPU2017 License:** 19  
**Test Sponsor:** Fujitsu  
**Tested by:** Fujitsu

**Test Date:** Feb-2020  
**Hardware Availability:** Feb-2020  
**Software Availability:** May-2019

## Base Compiler Invocation (Continued)

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
ifort -m64 icc -m64 -std=c11
```

Benchmarks using both C and C++:

```
icpc -m64 icc -m64 -std=c11
```

Benchmarks using Fortran, C, and C++:

```
icpc -m64 icc -m64 -std=c11 ifort -m64
```

## Base Portability Flags

```
503.bwaves_r: -DSPEC_LP64  
507.cactuBSSN_r: -DSPEC_LP64  
508.namd_r: -DSPEC_LP64  
510.parest_r: -DSPEC_LP64  
511.povray_r: -DSPEC_LP64  
519.lbm_r: -DSPEC_LP64  
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian  
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char  
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG  
538.imagick_r: -DSPEC_LP64  
544.nab_r: -DSPEC_LP64  
549.fotonik3d_r: -DSPEC_LP64  
554.roms_r: -DSPEC_LP64
```

## Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4
```

C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4
```

Fortran benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4 -auto -nostandard-realloc-lhs  
-align array32byte
```

(Continued on next page)





# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

**Fujitsu**

PRIMERGY RX2540 M5, Intel Xeon Gold 6246R,  
3.40 GHz

SPECrate®2017\_fp\_base = 229

SPECrate®2017\_fp\_peak = Not Run

**CPU2017 License:** 19

**Test Sponsor:** Fujitsu

**Tested by:** Fujitsu

**Test Date:** Feb-2020

**Hardware Availability:** Feb-2020

**Software Availability:** May-2019

## Base Optimization Flags (Continued)

Benchmarks using both Fortran and C:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4 -auto -nostandard-realloc-lhs  
-align array32byte
```

Benchmarks using both C and C++:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4
```

Benchmarks using Fortran, C, and C++:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4 -auto -nostandard-realloc-lhs  
-align array32byte
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic19.0u1-official-linux64.2019-07-09.html>

<http://www.spec.org/cpu2017/flags/Fujitsu-Platform-Settings-V1.0-CSL-RevE.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic19.0u1-official-linux64.2019-07-09.xml>

<http://www.spec.org/cpu2017/flags/Fujitsu-Platform-Settings-V1.0-CSL-RevE.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.0 on 2020-02-27 04:16:40-0500.

Report generated on 2020-03-31 14:58:59 by CPU2017 PDF formatter v6255.

Originally published on 2020-03-31.