



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECspeed®2017\_fp\_base = 55.6

ThinkSystem ST550  
(1.90 GHz, Intel Xeon Bronze 3206R)

SPECspeed®2017\_fp\_peak = Not Run

CPU2017 License: 9017


Test Date: Mar-2020

Test Sponsor: Lenovo Global Technology

Hardware Availability: Mar-2020

Tested by: Lenovo Global Technology

Software Availability: Nov-2019

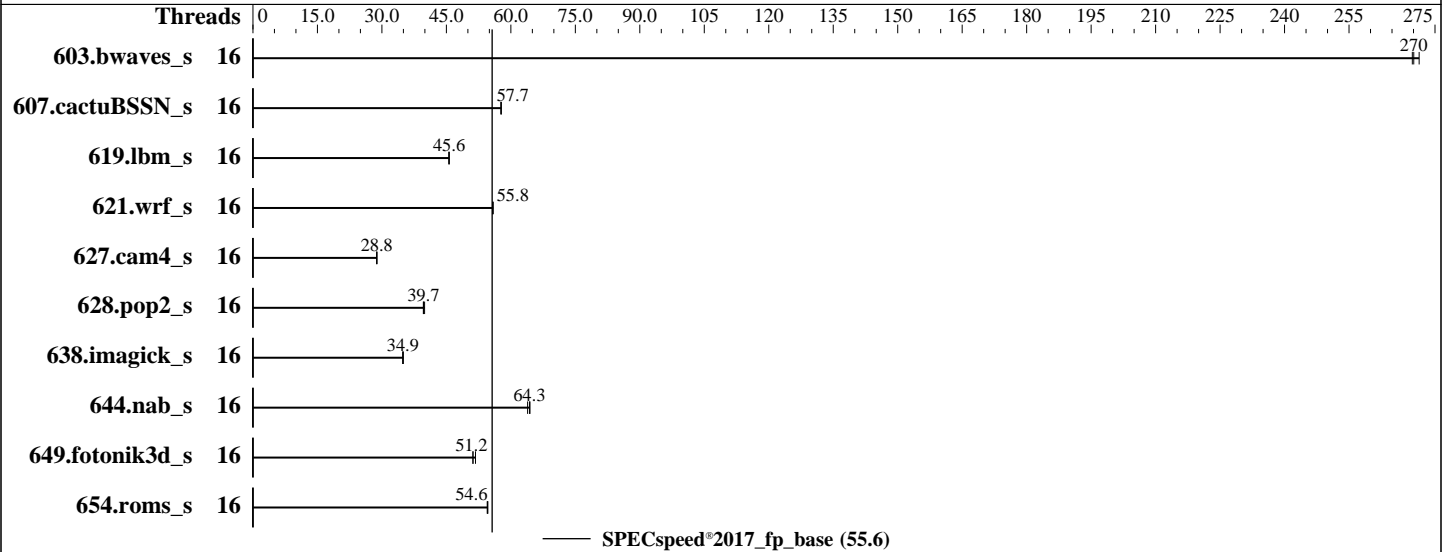

### Hardware

CPU Name: Intel Xeon Bronze 3206R  
 Max MHz: 1900  
 Nominal: 1900  
 Enabled: 16 cores, 2 chips  
 Orderable: 1,2 chips  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 11 MB I+D on chip per chip  
 Other: None  
 Memory: 192 GB (12 x 16 GB 2Rx8 PC4-2933Y-R, running at 2133)  
 Storage: 1 x 480 GB SATA SSD  
 Other: None

### Software

OS: Red Hat Enterprise Linux 8.1 (Ootpa)  
 Kernel 4.18.0-147.el8.x86\_64  
 Compiler: C/C++: Version 19.0.4.227 of Intel C/C++  
 Compiler for Linux;  
 Fortran: Version 19.0.4.227 of Intel Fortran  
 Compiler for Linux  
 Parallel: Yes  
 Firmware: Lenovo BIOS Version oOe152L 2.51 released Feb-2020 tested as O0E151L 2.51 Jan-2020  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: Not Applicable  
 Other: None  
 Power Management: BIOS set to prefer performance at the cost of additional power usage



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECSpeed®2017\_fp\_base = 55.6

ThinkSystem ST550  
(1.90 GHz, Intel Xeon Bronze 3206R)

SPECSpeed®2017\_fp\_peak = Not Run

CPU2017 License: 9017  
Test Sponsor: Lenovo Global Technology  
Tested by: Lenovo Global Technology

Test Date: Mar-2020  
Hardware Availability: Mar-2020  
Software Availability: Nov-2019

## Results Table

Benchmark	Base						Peak							
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	16	217	271	<b><u>218</u></b>	<b><u>270</u></b>	219	270							
607.cactuBSSN_s	16	289	57.8	289	57.7	<b><u>289</u></b>	<b><u>57.7</u></b>							
619.lbm_s	16	<b><u>115</u></b>	<b><u>45.6</u></b>	115	45.6	115	45.6							
621.wrf_s	16	<b><u>237</u></b>	<b><u>55.8</u></b>	237	55.9	237	55.8							
627.cam4_s	16	307	28.8	<b><u>308</u></b>	<b><u>28.8</u></b>	308	28.8							
628.pop2_s	16	297	39.9	300	39.6	<b><u>299</u></b>	<b><u>39.7</u></b>							
638.imagick_s	16	<b><u>413</u></b>	<b><u>34.9</u></b>	414	34.8	412	35.0							
644.nab_s	16	273	63.9	<b><u>272</u></b>	<b><u>64.3</u></b>	271	64.5							
649.fotonik3d_s	16	178	51.2	176	51.8	<b><u>178</u></b>	<b><u>51.2</u></b>							
654.roms_s	16	288	54.6	<b><u>288</u></b>	<b><u>54.6</u></b>	289	54.5							

SPECSpeed®2017\_fp\_base = 55.6

SPECSpeed®2017\_fp\_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
KMP\_AFFINITY = "granularity=fine,compact"  
LD\_LIBRARY\_PATH = "/home/cpu2017-1.1.0-ic19.0u4/lib/intel64"  
OMP\_STACKSIZE = "192M"

## General Notes

Binaries compiled on a system with 1x Intel Core i9-7900X CPU + 32GB RAM memory using Redhat Enterprise Linux 7.5  
Transparent Huge Pages enabled by default  
Prior to runcpu invocation  
Filesystem page cache synced and cleared with:  
sync; echo 3> /proc/sys/vm/drop\_caches  
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2018-3640 (Spectre variant 3a) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2018-3639 (Spectre variant 4)

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECspeed®2017\_fp\_base = 55.6

ThinkSystem ST550  
(1.90 GHz, Intel Xeon Bronze 3206R)

SPECspeed®2017\_fp\_peak = Not Run

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Mar-2020  
**Hardware Availability:** Mar-2020  
**Software Availability:** Nov-2019

### General Notes (Continued)

is mitigated in the system as tested and documented.

### Platform Notes

BIOS configuration:

Choose Operating Mode set to Maximum Performance and then set it to Custom Mode  
CPU P-state Control set to Cooperative  
C-States set to Legacy  
Adjacent Cache Prefetch set to Disable  
DCU Streamer Prefetcher set to Disable  
DCA set to Disable  
Uncore Frequency Scaling set to Disable

Sysinfo program /home/cpu2017-1.1.0-ic19.0u4/bin/sysinfo  
Rev: r6365 of 2019-08-21 295195f888a3d7edble6e46a485a0011  
running on localhost.localdomain Tue Mar 17 15:34:46 2020

SUT (System Under Test) info as seen by some common utilities.  
For more information on this section, see  
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo  
model name : Intel(R) Xeon(R) Bronze 3206R CPU @ 1.90GHz  
2 "physical id"s (chips)  
16 "processors"  
cores, siblings (Caution: counting these is hw and system dependent. The following  
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)  
cpu cores : 8  
siblings : 8  
physical 0: cores 0 1 2 3 4 5 6 7  
physical 1: cores 0 1 2 3 4 5 6 7

From lscpu:  
Architecture: x86\_64  
CPU op-mode(s): 32-bit, 64-bit  
Byte Order: Little Endian  
CPU(s): 16  
On-line CPU(s) list: 0-15  
Thread(s) per core: 1  
Core(s) per socket: 8  
Socket(s): 2  
NUMA node(s): 2  
Vendor ID: GenuineIntel  
CPU family: 6  
Model: 85  
Model name: Intel(R) Xeon(R) Bronze 3206R CPU @ 1.90GHz

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECspeed®2017\_fp\_base = 55.6

ThinkSystem ST550  
(1.90 GHz, Intel Xeon Bronze 3206R)

SPECspeed®2017\_fp\_peak = Not Run

CPU2017 License: 9017

Test Date: Mar-2020

Test Sponsor: Lenovo Global Technology

Hardware Availability: Mar-2020

Tested by: Lenovo Global Technology

Software Availability: Nov-2019

### Platform Notes (Continued)

```
Stepping: 7
CPU MHz: 1025.447
CPU max MHz: 1900.0000
CPU min MHz: 1000.0000
BogoMIPS: 3800.00
Virtualization: VT-x
L1d cache: 32K
L1i cache: 32K
L2 cache: 1024K
L3 cache: 11264K
NUMA node0 CPU(s): 0-7
NUMA node1 CPU(s): 8-15
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
aperfperf pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave
avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cdp_l3
invpcid_single intel_ppin ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi
flexpriority ept vpid fsgsbase tsc_adjust bml hle avx2 smep bmi2 erms invpcid rtm
cqm mpx rdt_a avx512f avx512dq rdseed adx smap clflushopt clwb intel_pt avx512cd
avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
cqm_mbm_local dtherm arat pln pts hwp hwp_act_window hwp_epp hwp_pkg_req pku ospke
avx512_vnni md_clear flush_lld arch_capabilities
```

```
/proc/cpuinfo cache data
cache size : 11264 KB
```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```
available: 2 nodes (0-1)
node 0 cpus: 0 1 2 3 4 5 6 7
node 0 size: 96386 MB
node 0 free: 95904 MB
node 1 cpus: 8 9 10 11 12 13 14 15
node 1 size: 96740 MB
node 1 free: 96257 MB
node distances:
node  0  1
 0:  10  21
 1:  21  10
```

```
From /proc/meminfo
MemTotal: 197762300 kB
HugePages_Total: 0
Hugepagesize: 2048 kB
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECspeed®2017\_fp\_base = 55.6

ThinkSystem ST550  
(1.90 GHz, Intel Xeon Bronze 3206R)

SPECspeed®2017\_fp\_peak = Not Run

CPU2017 License: 9017

Test Date: Mar-2020

Test Sponsor: Lenovo Global Technology

Hardware Availability: Mar-2020

Tested by: Lenovo Global Technology

Software Availability: Nov-2019

### Platform Notes (Continued)

From /etc/\*release\* /etc/\*version\*

os-release:

NAME="Red Hat Enterprise Linux"

VERSION="8.1 (Ootpa)"

ID="rhel"

ID\_LIKE="fedora"

VERSION\_ID="8.1"

PLATFORM\_ID="platform:el8"

PRETTY\_NAME="Red Hat Enterprise Linux 8.1 (Ootpa)"

ANSI\_COLOR="0;31"

redhat-release: Red Hat Enterprise Linux release 8.1 (Ootpa)

system-release: Red Hat Enterprise Linux release 8.1 (Ootpa)

system-release-cpe: cpe:/o:redhat:enterprise\_linux:8.1:ga

uname -a:

Linux localhost.localdomain 4.18.0-147.el8.x86\_64 #1 SMP Thu Sep 26 15:52:44 UTC 2019  
x86\_64 x86\_64 x86\_64 GNU/Linux

Kernel self-reported vulnerability status:

CVE-2018-3620 (L1 Terminal Fault):

Not affected

Microarchitectural Data Sampling:

Not affected

CVE-2017-5754 (Meltdown):

Not affected

CVE-2018-3639 (Speculative Store Bypass): Mitigation: Speculative Store Bypass disabled via prctl and seccomp

CVE-2017-5753 (Spectre variant 1):

Mitigation: usercopy/swaps barriers and \_\_user pointer sanitization

CVE-2017-5715 (Spectre variant 2):

Mitigation: Enhanced IBRS, IBPB: conditional, RSB filling

run-level 3 Mar 17 15:32

SPEC is set to: /home/cpu2017-1.1.0-ic19.0u4

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/mapper/rhel-home	xfs	391G	31G	360G	8%	/home

From /sys/devices/virtual/dmi/id

BIOS: Lenovo -[00E151L-2.51]- 01/14/2020

Vendor: Lenovo

Product: System X -[7X09TOZ000]-

Product Family: ThinkSystem

Serial: 1234567890

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem ST550  
(1.90 GHz, Intel Xeon Bronze 3206R)

SPECspeed®2017\_fp\_base = 55.6

SPECspeed®2017\_fp\_peak = Not Run

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Mar-2020  
**Hardware Availability:** Mar-2020  
**Software Availability:** Nov-2019

### Platform Notes (Continued)

Memory:  
12x SK Hynix HMA82GR7CJR8N-WM 16 GB 2 rank 2933

(End of data from sysinfo program)

### Compiler Version Notes

=====  
C | 619.lbm\_s(base) 638.imagick\_s(base) 644.nab\_s(base)  
=====

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.4.227 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.  
=====

=====  
C++, C, Fortran | 607.cactuBSSN\_s(base)  
=====

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.4.227 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.  
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.4.227 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.  
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)  
64, Version 19.0.4.227 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.  
=====

=====  
Fortran | 603.bwaves\_s(base) 649.fotonik3d\_s(base) 654.roms\_s(base)  
=====

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)  
64, Version 19.0.4.227 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.  
=====

=====  
Fortran, C | 621.wrf\_s(base) 627.cam4\_s(base) 628.pop2\_s(base)  
=====

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)  
64, Version 19.0.4.227 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.  
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.4.227 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

**Lenovo Global Technology**

SPECspeed®2017\_fp\_base = 55.6

ThinkSystem ST550  
(1.90 GHz, Intel Xeon Bronze 3206R)

SPECspeed®2017\_fp\_peak = Not Run

**CPU2017 License:** 9017

**Test Date:** Mar-2020

**Test Sponsor:** Lenovo Global Technology

**Hardware Availability:** Mar-2020

**Tested by:** Lenovo Global Technology

**Software Availability:** Nov-2019

## Compiler Version Notes (Continued)

---

## Base Compiler Invocation

C benchmarks:

```
icc -m64 -std=c11
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
ifort -m64 icc -m64 -std=c11
```

Benchmarks using Fortran, C, and C++:

```
icpc -m64 icc -m64 -std=c11 ifort -m64
```

## Base Portability Flags

```
603.bwaves_s: -DSPEC_LP64
```

```
607.cactuBSSN_s: -DSPEC_LP64
```

```
619.lbm_s: -DSPEC_LP64
```

```
621.wrf_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
```

```
627.cam4_s: -DSPEC_LP64 -DSPEC_CASE_FLAG
```

```
628.pop2_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
```

```
-assume byterecl
```

```
638.imagick_s: -DSPEC_LP64
```

```
644.nab_s: -DSPEC_LP64
```

```
649.fotonik3d_s: -DSPEC_LP64
```

```
654.roms_s: -DSPEC_LP64
```

## Base Optimization Flags

C benchmarks:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
```

```
-ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp -DSPEC_OPENMP
```

Fortran benchmarks:

```
-DSPEC_OPENMP -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
```

```
-ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp
```

```
-nostandard-realloc-lhs
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECspeed®2017\_fp\_base = 55.6

ThinkSystem ST550  
(1.90 GHz, Intel Xeon Bronze 3206R)

SPECspeed®2017\_fp\_peak = Not Run

CPU2017 License: 9017

Test Date: Mar-2020

Test Sponsor: Lenovo Global Technology

Hardware Availability: Mar-2020

Tested by: Lenovo Global Technology

Software Availability: Nov-2019

## Base Optimization Flags (Continued)

Benchmarks using both Fortran and C:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp -DSPEC_OPENMP
-nostandard-realloc-lhs
```

Benchmarks using Fortran, C, and C++:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp -DSPEC_OPENMP
-nostandard-realloc-lhs
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic19.0u1-official-linux64.2019-07-09.html>

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-CLX-F.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic19.0u1-official-linux64.2019-07-09.xml>

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-CLX-F.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.0 on 2020-03-17 03:34:45-0400.

Report generated on 2020-04-14 14:14:10 by CPU2017 PDF formatter v6255.

Originally published on 2020-04-14.